

NOTES:

EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUITS PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE $\frac{1}{4}$ " DEEP AND 4" TO 6" LONG.

WHEN FOUNDATION EXTENDS 2" ABOVE FINISHED GRADE, ALL EDGES SHALL BE CHAMFERED $\frac{3}{4}$ ".

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.


PEDESTAL POLE SHALL HAVE A BREAKAWAY BASE, EITHER SLIP BASE OR FRANGIBLE TRANSFORMER TYPE, 3" X 5" MINIMUM CURVED HANDHOLE WITH FRAME AND COVER REQUIRED IN POLE WHEN SLIP BASE SUPPLIED.

DISTANCE FROM BOTTOM OF POLE TO CENTER OF HANDHOLE SHALL BE 12".

FOUNDATION TO EXTEND 2" ABOVE GROUND WHEN IN EARTH AND SHALL BE FLUSH WITH SURFACE WHEN IN SIDEWALK.

REFER TO STANDARD MP-2 FOR GROUNDING LUG DETAIL.

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

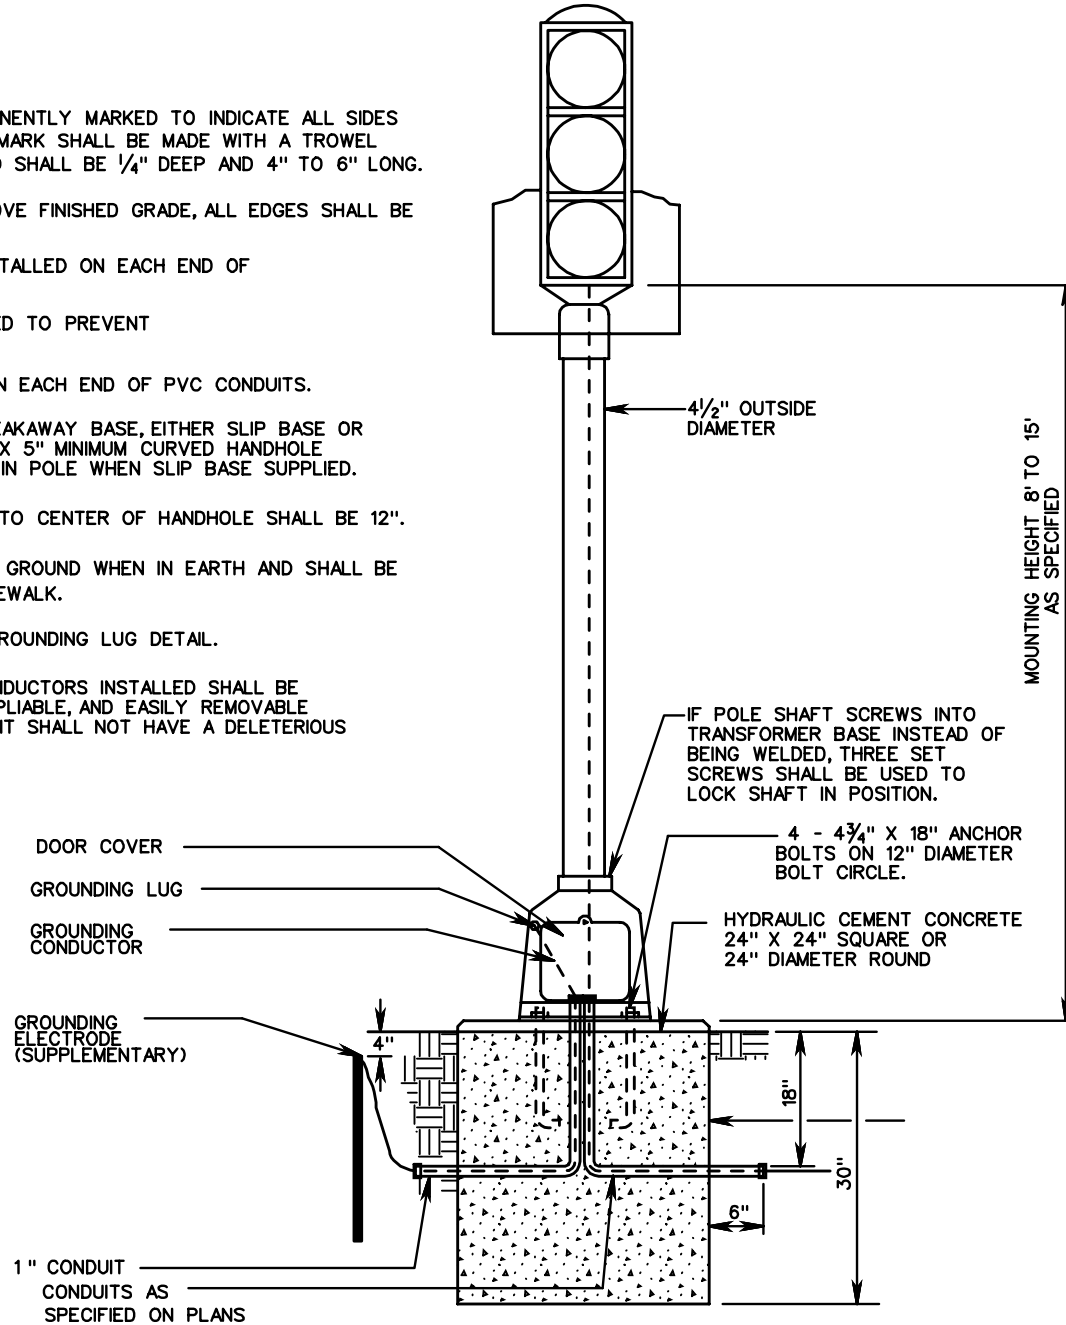

ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

1302.30

**PEDESTAL POLE AND FOUNDATION
DETAILS**

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION
REFERENCE

700