



# COMMONWEALTH of VIRGINIA

DEPARTMENT OF TRANSPORTATION  
1401 EAST BROAD STREET  
RICHMOND, VIRGINIA 23219 2000

David S. Ekern, P.E.  
COMMISSIONER

June 22, 2009

## MEMORANDUM

To: All Holders of the Virginia Department of Transportation's 2008 Road and Bridge Standards

The following is a list of sheets contained in the 2008 Road and Bridge Standards that have been revised. Please add these pages to your copy of the standards. An insertable sheet will not be required in plan assemblies for the following sheet only. Changes to this sheet will not affect the basis of payment or estimates.

PAGE	REVISION
1301.01	Revised Table of Contents for section 1300

The following is a list of revised standards to the 2008 Road and Bridge Standards that require an insertable sheet to be included in your plan assembly until the next edition of the imperial standards is published. Please add these pages to your copy of the standards. The respective insertable sheet number has been placed with the revised standard. An insertable sheet is available for each of these revised standards. The insertable sheets are available on VDOT's web site, on the FTP server, and in Falcon DMS for VDOT personnel. These insertable sheets will be required in plan assemblies for projects advertised January 12, 2010 and later.

PAGE	INSERT	STANDARD	REVISION
1307_10	IIS13_01	PA-1,2,3	REVISED NOTES/DETAILS
1310_11	IIS13_02	PF-8	REVISED DETAILS
1301_10	IIS13_12	CF-1	REVISED NOTES/DETAILS
1301_20	IIS13_13	CF-2	REVISED NOTES/DETAILS
1301_30	IIS13_14	CF-3	REVISED NOTES/DETAILS
1302_10	IIS13_15	MP-1	REVISED NOTES/DETAILS
1302_20	IIS13_16	MP-2	REVISED DETAILS
1302_30	IIS13_17	PF-2	REVISED DETAILS

<b>PAGE</b>	<b>INSERT</b>	<b>STANDARD</b>	<b>REVISION</b>
1303_10	IIS13_18	SW-1	REVISED DETAILS
1303_20	IIS13_19	SW-2	REVISED DETAILS
1303_40	IIS13_20	SMB-1,2,3	REVISED NOTES
1304_10	IIS13_21	TA-1	REVISED DETAILS
1305_10	IIS13_22	SMD-1,2	REVISED DETAILS
1306_10	IIS13_23	WD-1	REVISED DETAILS
1306_20	IIS13_24	WD-2	REVISED DETAILS
1309_10	IIS13_25	FB-2	REVISED DETAILS
1310_10	IIS13_26	PF-1	REVISED DETAILS
1310_20	IIS13_27	LF-1	REVISED DETAILS
1311_20	IIS13_28	LP-3	REVISED DETAILS
1312_11	IIS13_29	SE-1	REVISED DETAILS
1312_50	IIS13_30	SE-5	REVISED NOTES
1312_60	IIS13_31	SE-6	REVISED NOTES
1312_70	IIS13_32	SE-7	REVISED NOTES
1312_90	IIS13_33	SE-9	SPLIT INTO TWO PAGES (1312_90 AND 1312_91)
1312_91	IIS13_33	SE-9	NEW
1313_10	IIS13_34	SE-10	REVISED DETAILS
1315_11	IIS13_35	TD-1A,B,C	REVISED DETAILS
1317_10	IIS13_36	JB-R1,R2	REVISED NOTES/DETAILS
1317_11	IIS13_36	JB-R1,R2	REVISED NOTES
1317_20	IIS13_37	JB-S1,S2,S3	REVISED NOTES
1318_10	IIS13_38	ECI-1	REVISED NOTES
1321_12	IIS13_39	STP-1	REVISED NOTES
1322_12	IIS13_40	SSP-VA	REVISED NOTES
1324_13	IIS13_41	OSS-1	REVISED NOTES/DETAILS
1324_15	IIS13_41	OSS-1	REVISED NOTES
1324_16	IIS13_42	OSS-1	REVISED NOTES
1325_51	IIS13_43	SPD-5	REVISED NOTES
1325_60	IIS13_44	SPD-6	REVISED NOTES
1327_20	IIS13_45	ED-3	REVISED NOTES

If you have any questions or comments regarding this revision to the publication, please contact Chuck Patterson, at (804) 786-1805, of the Standards and Special Design Section.

Sincerely,  
Signature on file: June 22, 2009

Mohammad Mirshahi, P.E.  
State Location and Design Engineer

STANDARD	TITLE	PAGE
CF-1	CONTROLLER CABINET FOUNDATION AND CONDUIT	1301.10
CF-2	CONTROLLER CENTER CABINET FOUNDATION AND CABINET	1301.20
CF-3	CONTROLLER CABINET FOUNDATION AND CABINET	1301.30
MP-1	SIGNAL POLE DETAILS	1302.10
MP-2	SIGNAL POLE DETAILS	1302.20
PF-2	PEDESTAL POLE AND FOUNDATION	1302.30
SW-1	SIGNAL HEAD MOUNTING DETAILS	1303.10
SW-2	SIGNAL HEAD MOUNTING DETAILS	1303.20
SM-3	SIGNAL HEAD MOUNTING DETAILS	1303.30
SMB-1,2,3	SIGNAL HEAD MOUNTING DETAILS	1303.40
TA-1	TETHER WIRE DETAILS	1304.10
SMD-1,2	SIGN MOUNTING DETAILS	1305.10
WD-1	STEEL SIGNAL POLE WIRING AND RIGGING	1306.10
WD-2	WOOD POLE WIRING AND RIGGING	1306.20
PA-1,2,3	PEDESTRIAN ACTUATION	1307.10
SPD-5,6,7,8,9	PEDESTRIAN SIGNAL INDICATION	1308.10
FB-2	FLASHING BEACON	1309.10
PF-1	SIGNAL POLE FOUNDATION	1310.10
LF-1	LIGHTING POLE FOUNDATION	1310.20
LP-1,2	LIGHTING POLE	1311.10
LP-3	HIGH MAST LIGHT POLE	1311.20
SE-1	ELECTRICAL SERVICE	1312.10
SE-2	ELECTRICAL SERVICE	1312.20
SE-3	ELECTRICAL SERVICE	1312.30
SE-4	ELECTRICAL SERVICE	1312.40
SE-5	ELECTRICAL SERVICE	1312.50
SE-6	ELECTRICAL SERVICE	1312.60
SE-7	ELECTRICAL SERVICE	1312.70
SE-8	ELECTRICAL SERVICE	1312.80
SE-9	ELECTRICAL SERVICE	1312.90
	ELECTRICAL SERVICE	1312.91
SE-10	ELECTRICAL SERVICE	1313.10
SE-11	ELECTRICAL SERVICE	1313.20
CCW-1	CONTROL CENTER WIRING	1314.10
TD-1A,B,C	LOOP DETECTOR	1315.10
TS-1	TYPICAL ONE-WAY BRIDGE SIGNAL	1316.10

INDEX OF SHEETS  
SECTION 1300-TRAFFIC CONTROL

VIRGINIA DEPARTMENT OF TRANSPORTATION




ROAD AND BRIDGE STANDARDS

REVISION DATE


SHEET 1 OF 2

1300.01


**TOP VIEW**  
 SIZE AND NUMBER AS REQUIRED BY PLANS  
 2- 2" CONDUITS REQUIRED FOR FUTURE USE SHALL BE STUBBED OUT AND CAPPED. NOTE THAT ADDITIONAL SPARE CONDUITS MAY BE REQUIRED BY THE PLANS.  
 1- 1" CONDUIT REQUIRED FOR GROUNDING CONDUCTOR

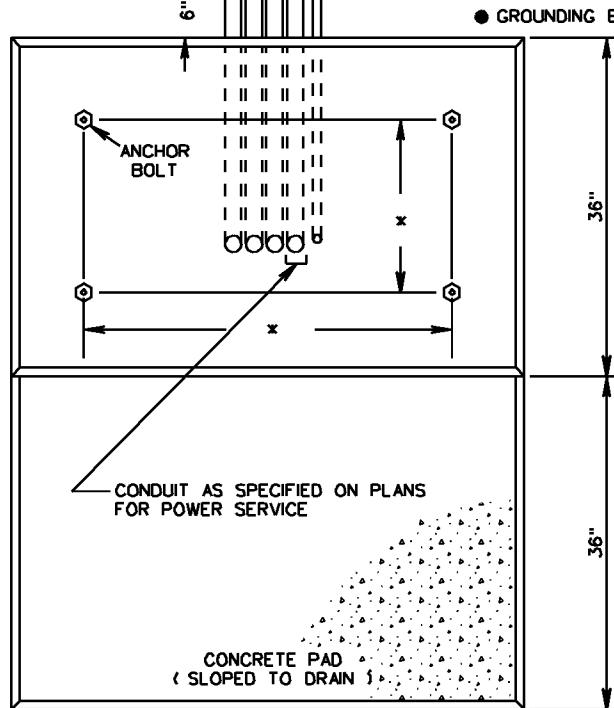

**SIDE VIEW**

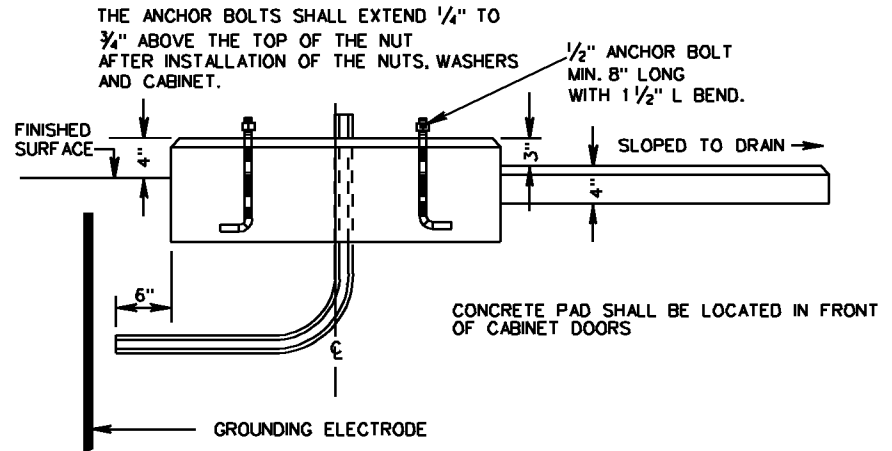

**FRONT VIEW**

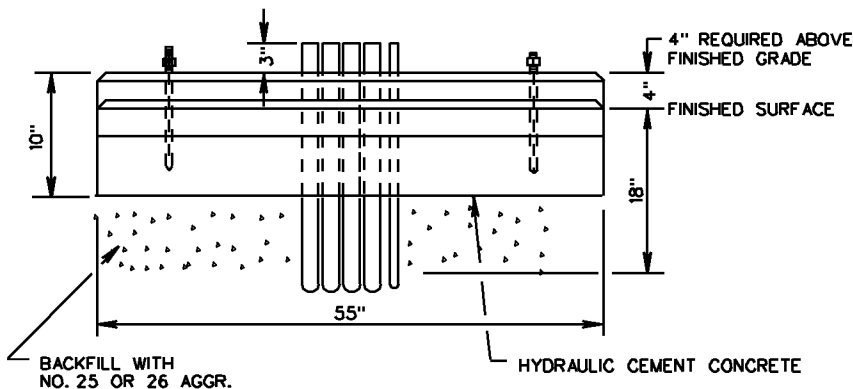

**NOTES:**

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.  
 IN ADDITION TO ELECTRICAL SERVICE GROUNDING ELECTRODE SYSTEM, EACH STRUCTURE SHALL UTILIZE ITS OWN GROUNDING ELECTRODE.

ALL EXPOSED CONCRETE SURFACE EDGES SHALL BE CHAMFERED 3/4".  
 \* ANCHOR BOLTS AND BOLT CIRCLE TEMPLATE SHALL BE FURNISHED WITH CABINET.  
 CABINET SHALL BE CENTERED ON FOUNDATION.  
 EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUITS PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE 1/4" DEEP AND 4" TO 6" LONG.

THE CONTROLLER CABINET AT THE INSIDE AND OUTSIDE FOUNDATION JOINTS SHALL BE SEALED WITH A SILICONE SEALANT.  
 BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.  
 EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.  
 GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.  
 TWO - 1/2" DIAMETER WEEPHOLES SHALL BE PROVIDED IN THE FOUNDATION AND LOCATED 2" INSIDE OF THE BACK OR SIDE EDGES OF THE CONTROLLER CABINET. WEEPHOLES SHALL BE SLOPED TO ALLOW OUTLET TO BE 3" BELOW TOP OF FOUNDATION. TWO INCHES OF THE OUTLET END SHALL BE FIBER FILLED.


SPECIFICATION REFERENCE
700

**CONTROLLER CABINET FOUNDATION**  
 CABINET PLACEMENT DETAILS  
 VIRGINIA DEPARTMENT OF TRANSPORTATION


<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1301.10

SIZE AND NUMBER AS REQUIRED BY PLANS

TOP VIEW

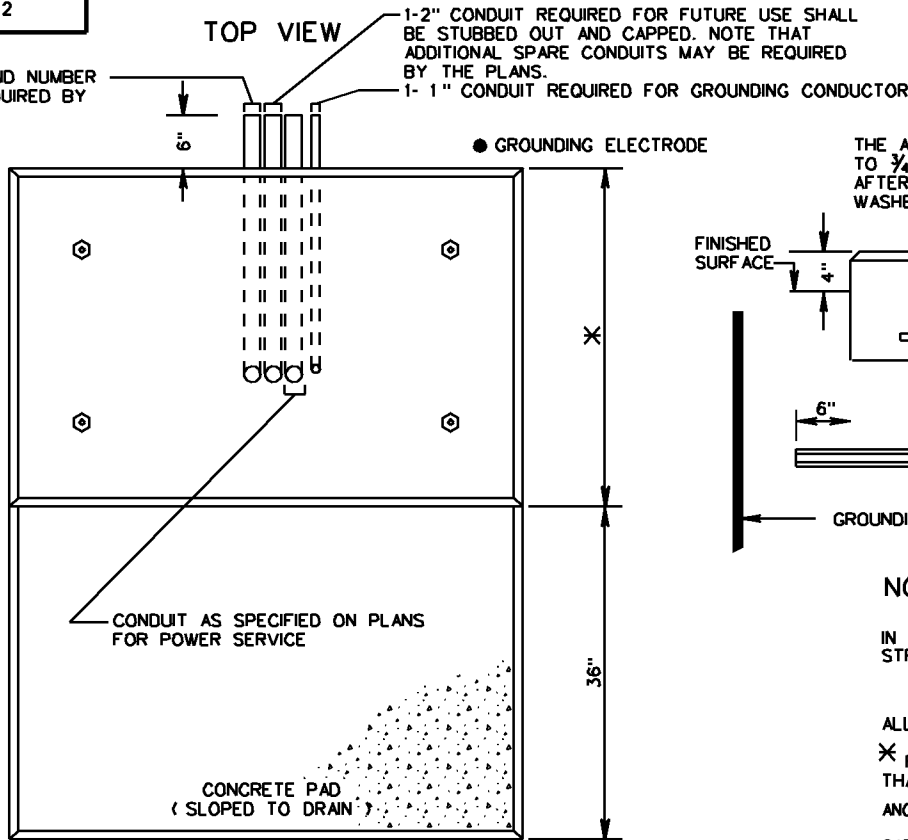

SIDE VIEW

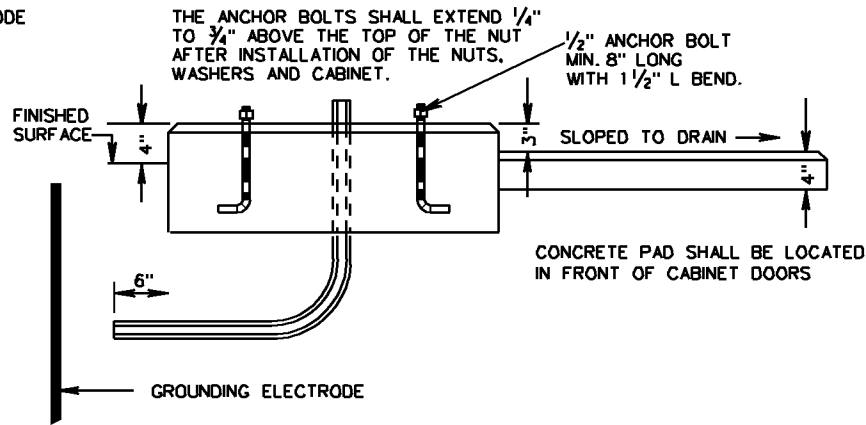

NOTES:

IN ADDITION TO ELECTRICAL SERVICE GROUNDING ELECTRODE SYSTEM, EACH STRUCTURE SHALL UTILIZE ITS OWN GROUNDING ELECTRODE.

ALL EXPOSED CONCRETE SURFACE EDGES SHALL BE CHAMFERED 3/4".

\* FOUNDATION LENGTH AND WIDTH SHALL BE AS REQUIRED TO PROJECT NO LESS THAN A MINIMUM 4" BEYOND ALL SIDES OF THE CABINET.

ANCHOR BOLTS AND BOLT CIRCLE TEMPLATE SHALL BE FURNISHED WITH CABINET.

CABINET SHALL BE CENTERED ON FOUNDATION.

EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUITS PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE 1/4" DEEP AND 4" TO 6" LONG.

THE CONTROL CENTER CABINET AT THE INSIDE AND OUTSIDE FOUNDATION JOINTS SHALL BE SEALED WITH A SILICONE SEALANT.

BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.


EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

TWO - 1/2" DIAMETER WEEPHOLES SHALL BE PROVIDED IN THE FOUNDATION AND LOCATED 2" INSIDE THE BACK OR SIDE EDGES OF THE CONTROLLER CABINET. WEEPHOLES SHALL BE SLOPED TO ALLOW OUTLET TO BE 3" BELOW THE TOP OF THE FOUNDATION. TWO INCHES OF THE OUTLET END SHALL BE FIBER FILLED.

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

FRONT VIEW

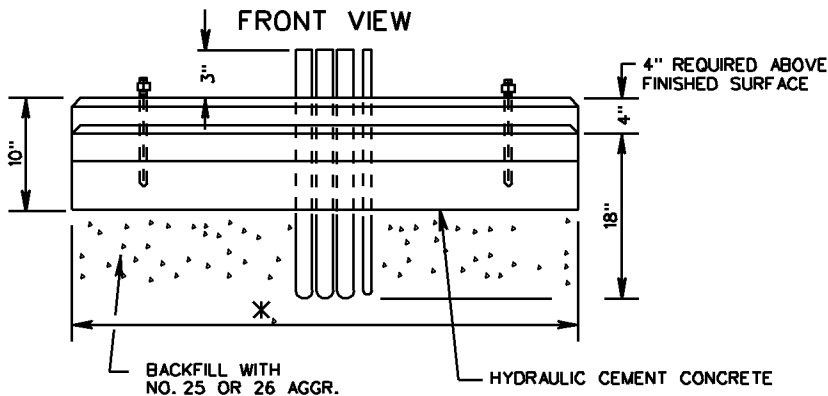

**CONTROL CENTER CABINET FOUNDATION**  
**CABINET PLACEMENT DETAILS**  
 VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

700




ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1


REVISION DATE

1301.20

06-15-2009

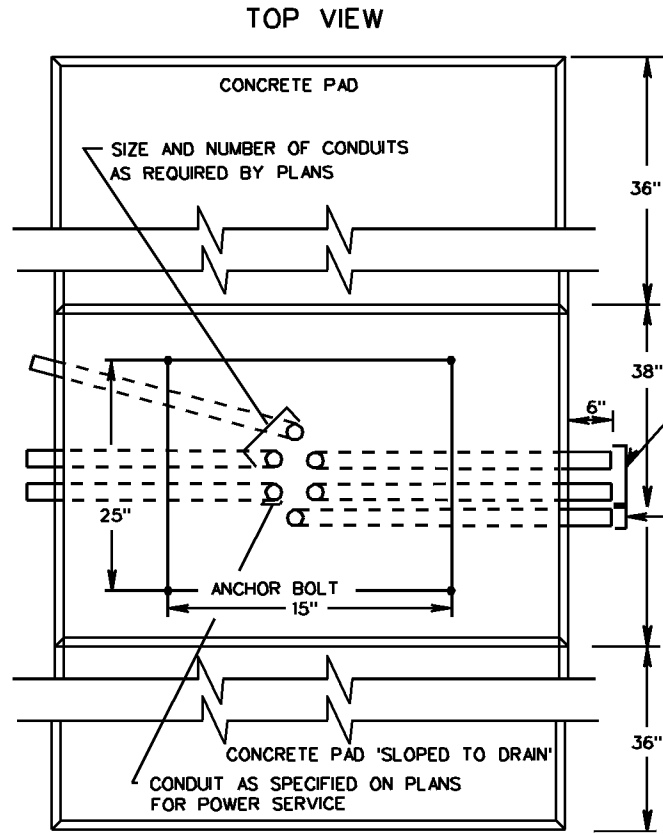

SIDE VIEW

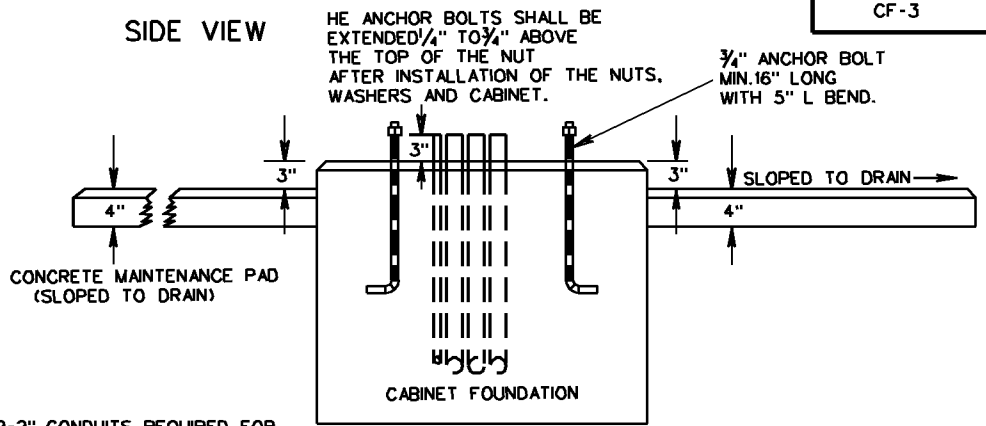


2-2" CONDUITS REQUIRED FOR FUTURE USE SHALL BE STUBBED AND CAPPED. NOTE THAT ADDITIONAL SPARE CONDUITS MAY BE REQUIRED BY THE PLANS.  
1-1" CONDUIT REQUIRED FOR GROUNDING CONDUCTOR.

CONCRETE PAD SHALL BE LOCATED IN FRONT OF CABINET DOORS

NOTES:

- IN ADDITION TO ELECTRICAL SERVICE GROUNDING ELECTRODE SYSTEM, EACH STRUCTURE SHALL UTILIZE ITS OWN GROUNDING ELECTRODE.
- ALL EXPOSED CONCRETE SURFACE EDGES SHALL BE CHAMFERED 3/4". ANCHOR BOLTS, BOLT CIRCLE TEMPLATE AND METAL RISER SHALL BE FURNISHED WITH CABINET.
- CABINET SHALL BE CENTERED ON FOUNDATION WITH RISER ATTACHED TO FOUNDATION & CABINET ON METAL RISER.
- CONDUITS ENTERING THE FOUNDATION SHALL BE ARRANGED IN A CIRCULAR PATTERN. THE CONTRACTOR SHALL SUBMIT A CONDUIT ARRANGEMENT PLAN FOR APPROVAL PRIOR TO PLACEMENT.
- EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUIT PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE 1/4" DEEP AND 4" TO 6" LONG.
- THE CONTROLLER CABINET AT THE INSIDE AND OUTSIDE FOUNDATION JOINTS SHALL BE SEALED WITH A SILICONE SEALANT.
- BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS. EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY. GROUNDING BUSHINGS SHALL BE ON EACH END OF METAL CONDUITS.
- TWO- 1/2" DIAMETER WEEPHOLES SHALL BE PROVIDED IN THE FOUNDATION AND LOCATED 2" INSIDE OF THE BACK OR SIDE EDGES OF THE CONTROLLER CABINET. WEEPHOLES SHALL BE SLOPED TO ALLOW OUTLET TO BE 3" BELOW TOP OF FOUNDATION. TWO INCHES OF THE OUTLET END SHALL BE FIBER FILLED.
- OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.


FRONT VIEW

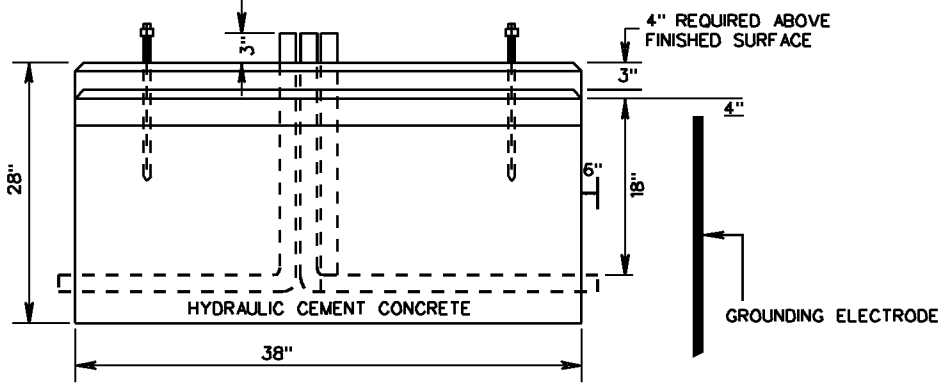


SPECIFICATION REFERENCE
700

**CONTROLLER CABINET FOUNDATION**  
CABINET PLACEMENT DETAILS  
VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1301.30

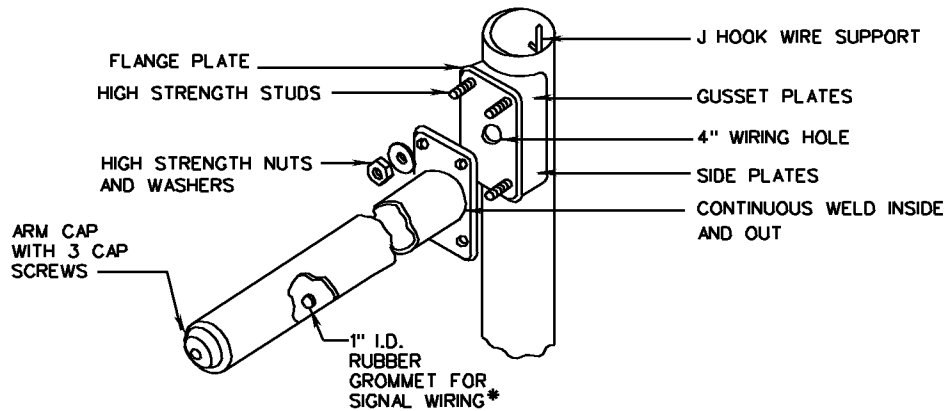

ARM AND SIGNAL ATTACHMENT

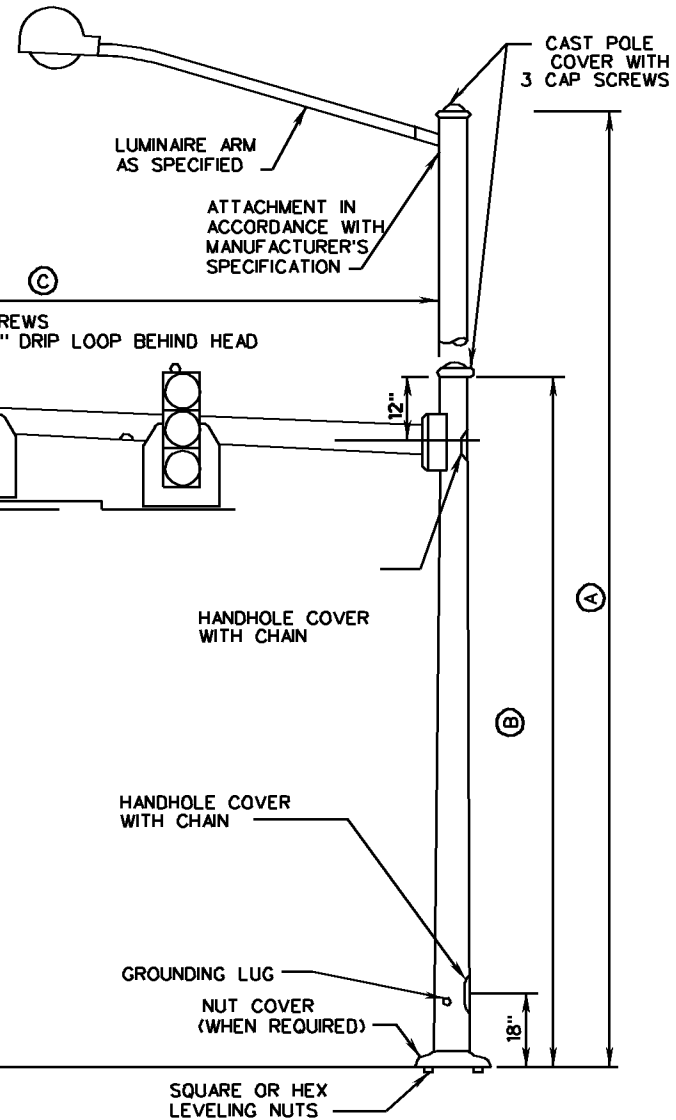

NOTES:

(A) POLE SHAFT LENGTH AND MAST ARM MOUNTING HEIGHT SHALL BE AS REQUIRED TO OBTAIN SPECIFIED MOUNTING HEIGHT OF TRAFFIC SIGNAL HEADS AND LUMINAIRES

(B) AS REQUIRED BY PLANS (HEIGHT INCLUDES TRANSFORMER BASE WHEN REQUIRED).

(C) AS REQUIRED BY PLANS.

\* HOLE AND GROMMET FOR SIGNAL WIRING SHALL BE LOCATED ON THE SIDE OF THE ARM DIRECTLY BEHIND THE HANGER ASSEMBLY WHEN STANDARD SM-3 HANGER ASSEMBLIES ARE REQUIRED. SIGNAL WIRING SHALL BE CONCEALED IN THE STANDARD SM-3 HANGER ASSEMBLIES.

THE ALIGNMENT OF THE LUMINAIRE ARM SHALL BE AS SHOWN ON THE PLANS.

REFER TO STANDARD MP-2 FOR GROUNDING LUG DETAIL.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

1302.10

06-15-2009

SIGNAL POLE DETAILS


MAST ARM AND COMBINATION LUMINAIRE MAST ARM POLE

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

700



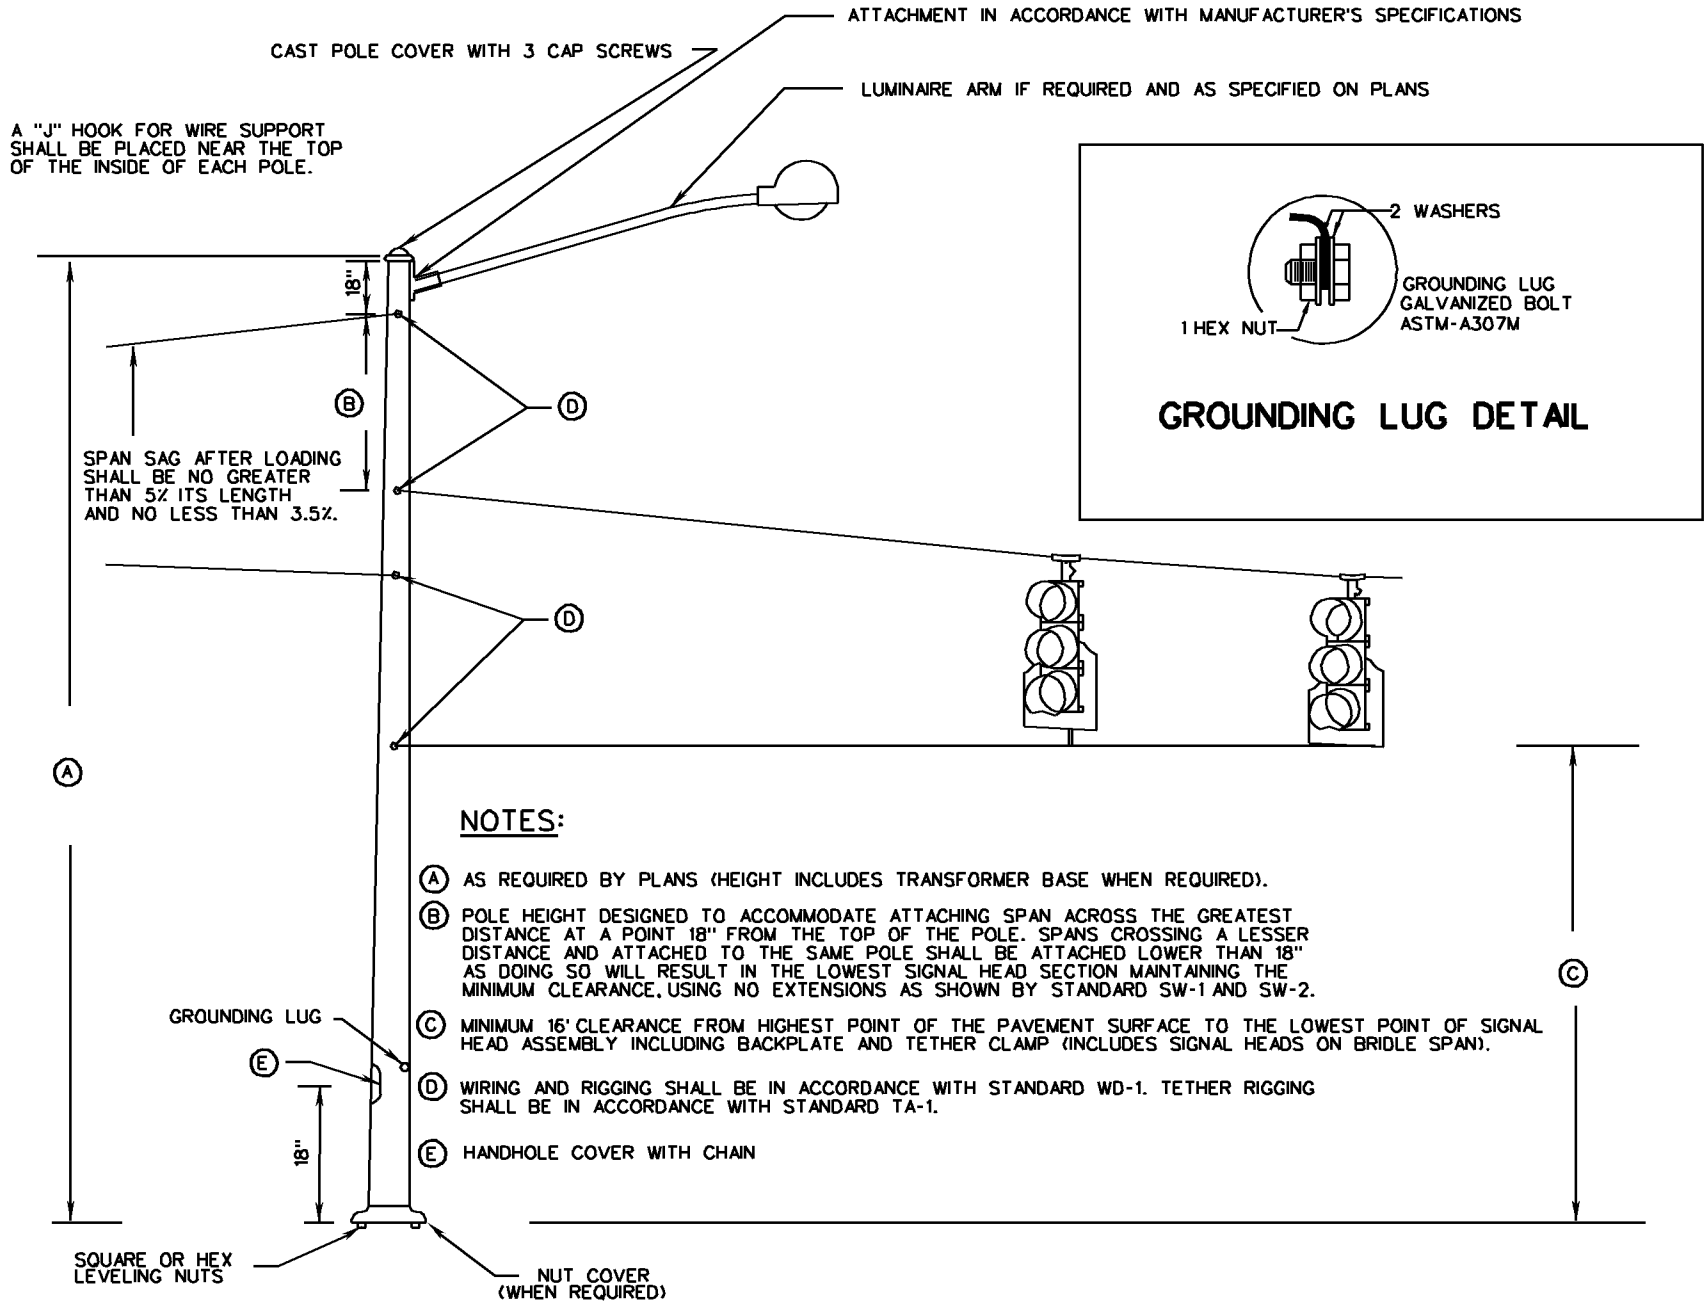

SPECIFICATION REFERENCE
700

**SIGNAL POLE DETAILS**  
**STRAIN AND COMBINATION LUMINAIRE STRAIN POLE**  
 VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1302.20

**NOTES:**

EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUITS PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE  $\frac{1}{4}$ " DEEP AND 4" TO 6" LONG.

WHEN FOUNDATION EXTENDS 2" ABOVE FINISHED GRADE, ALL EDGES SHALL BE CHAMFERED  $\frac{3}{4}$ ".

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.


PEDESTAL POLE SHALL HAVE A BREAKAWAY BASE, EITHER SLIP BASE OR FRANGIBLE TRANSFORMER TYPE, 3" X 5" MINIMUM CURVED HANDHOLE WITH FRAME AND COVER REQUIRED IN POLE WHEN SLIP BASE SUPPLIED.

DISTANCE FROM BOTTOM OF POLE TO CENTER OF HANDHOLE SHALL BE 12".

FOUNDATION TO EXTEND 2" ABOVE GROUND WHEN IN EARTH AND SHALL BE FLUSH WITH SURFACE WHEN IN SIDEWALK.

REFER TO STANDARD MP-2 FOR GROUNDING LUG DETAIL.

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

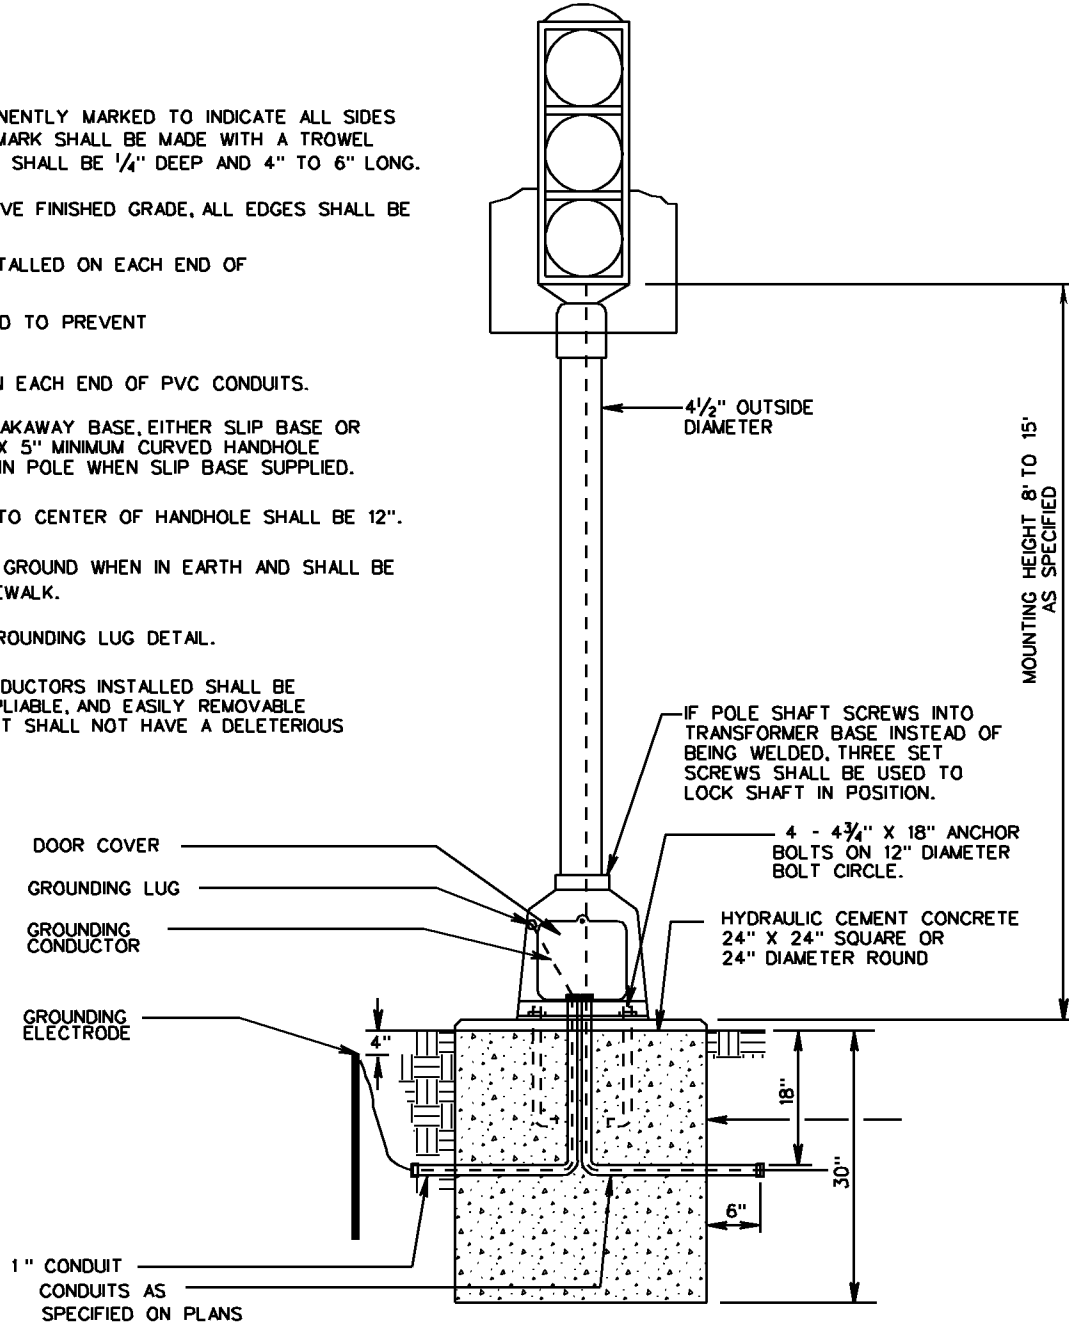


<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
SHEET 1 OF 1	REVISION DATE
1302.30	06-15-2009

## PEDESTAL POLE AND FOUNDATION DETAILS


VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE
700

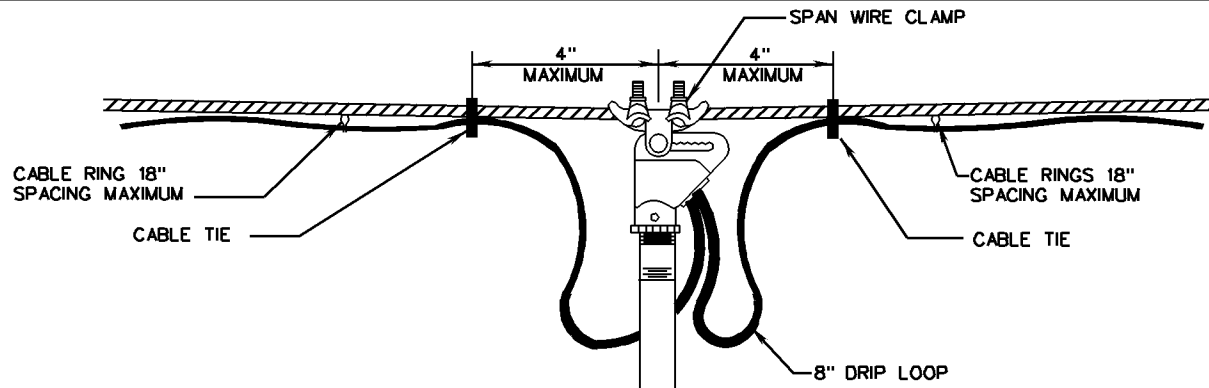

A WATERPROOF SEALANT SHALL BE APPLIED TO THE THREAD AREA ABOVE THE PIPE COUPLING BEFORE THE LOCK NUT IS SCREWED DOWN.

AN EASILY REMOVABLE WATERPROOF SEALANT SHALL BE APPLIED ON THE CONNECTION BETWEEN THE HANGAR ASSEMBLY AND SIGNAL HEAD ASSEMBLY

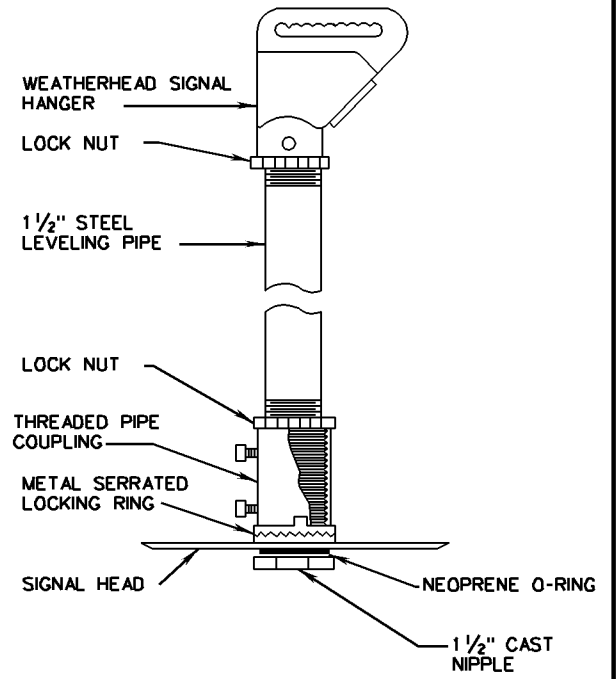


**NOTES:**

SIGNAL HEADS MOUNTED ON THE SAME SPAN WIRE SHALL BE INSTALLED SO THE BOTTOM SECTIONS ARE ON A LEVEL PLANE OR NO GREATER THAN 12" ABOVE THE BOTTOM OF THE LOWEST SIGNAL HEAD.

SIGNAL HEAD CABLES SHALL BE CONTINUOUS FROM THE CONTROLLER TO THE NEAREST SIGNAL HEAD TO WHICH IT APPLIES EXCEPT CABLE TERMINATIONS MAY BE ALLOWED ON THE POLE TERMINAL STRIP WHEN REQUIRED BY THE PLANS. THE CABLE SHALL ALSO BE CONTINUOUS FROM THE FIRST SIGNAL HEAD TO ANY ADDITIONAL HEADS WITH TERMINATION TERMINALS WITHIN THE SIGNAL HEAD HOUSING.

SPACERS SHALL BE INSTALLED BETWEEN THE EYELET OF THE HANGER ASSEMBLY AND THE INSIDE OF THE SPAN WIRE CLAMP TO ELIMINATE ANY GAP.

WEATHERHEAD SIGNAL HANGER, STEEL LEVELING PIPE AND THREADED PIPE COUPLING SHALL BE GALVANIZED OR PAINTED FLAT BLACK OR YELLOW

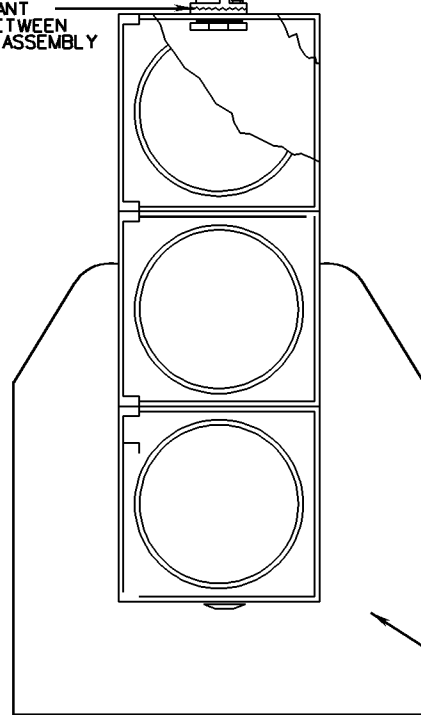

BACKPLATE

SPECIFICATION REFERENCE
703

**SIGNAL HEAD MOUNTING DETAILS**  
SPAN WIRE

VIRGINIA DEPARTMENT OF TRANSPORTATION



<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1303.10

NOTES:

SIGNAL HEADS MOUNTED ON THE SAME SPAN WIRE SHALL BE INSTALLED SO THE BOTTOM SECTIONS ARE ON A LEVEL PLANE OR NO GREATER THAN 12" ABOVE THE BOTTOM OF THE LOWEST SIGNAL HEAD.

SIGNAL HEAD CABLES SHALL BE CONTINUOUS FROM THE CONTROLLER TO THE NEAREST SIGNAL HEAD TO WHICH IT APPLIES EXCEPT CABLE TERMINATIONS MAY BE ALLOWED ON THE POLE TERMINAL STRIP WHEN REQUIRED BY THE PLANS. THE CABLE SHALL ALSO BE CONTINUOUS FROM THE FIRST SIGNAL HEAD TO ANY ADDITIONAL HEADS WITH TERMINATION ON THE TERMINALS WITHIN THE SIGNAL HEAD HOUSING. ALL MISCELLANEOUS HARDWARE SHALL BE STAINLESS STEEL.

SPACERS SHALL BE INSTALLED BETWEEN THE EYELET OF THE HANGER ASSEMBLY AND THE INSIDE OF THE SPAN WIRE CLAMP TO ELIMINATE ANY GAP.

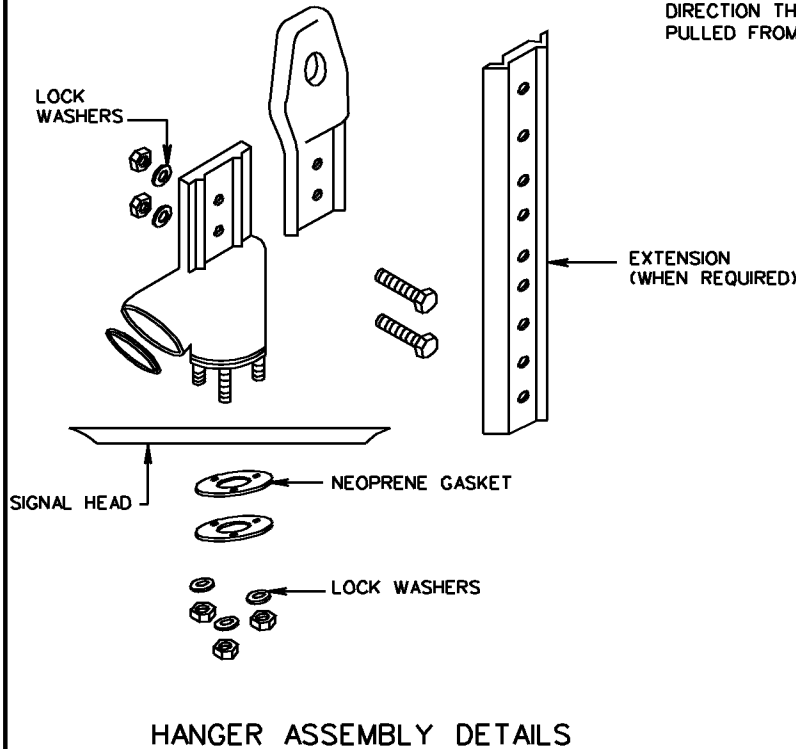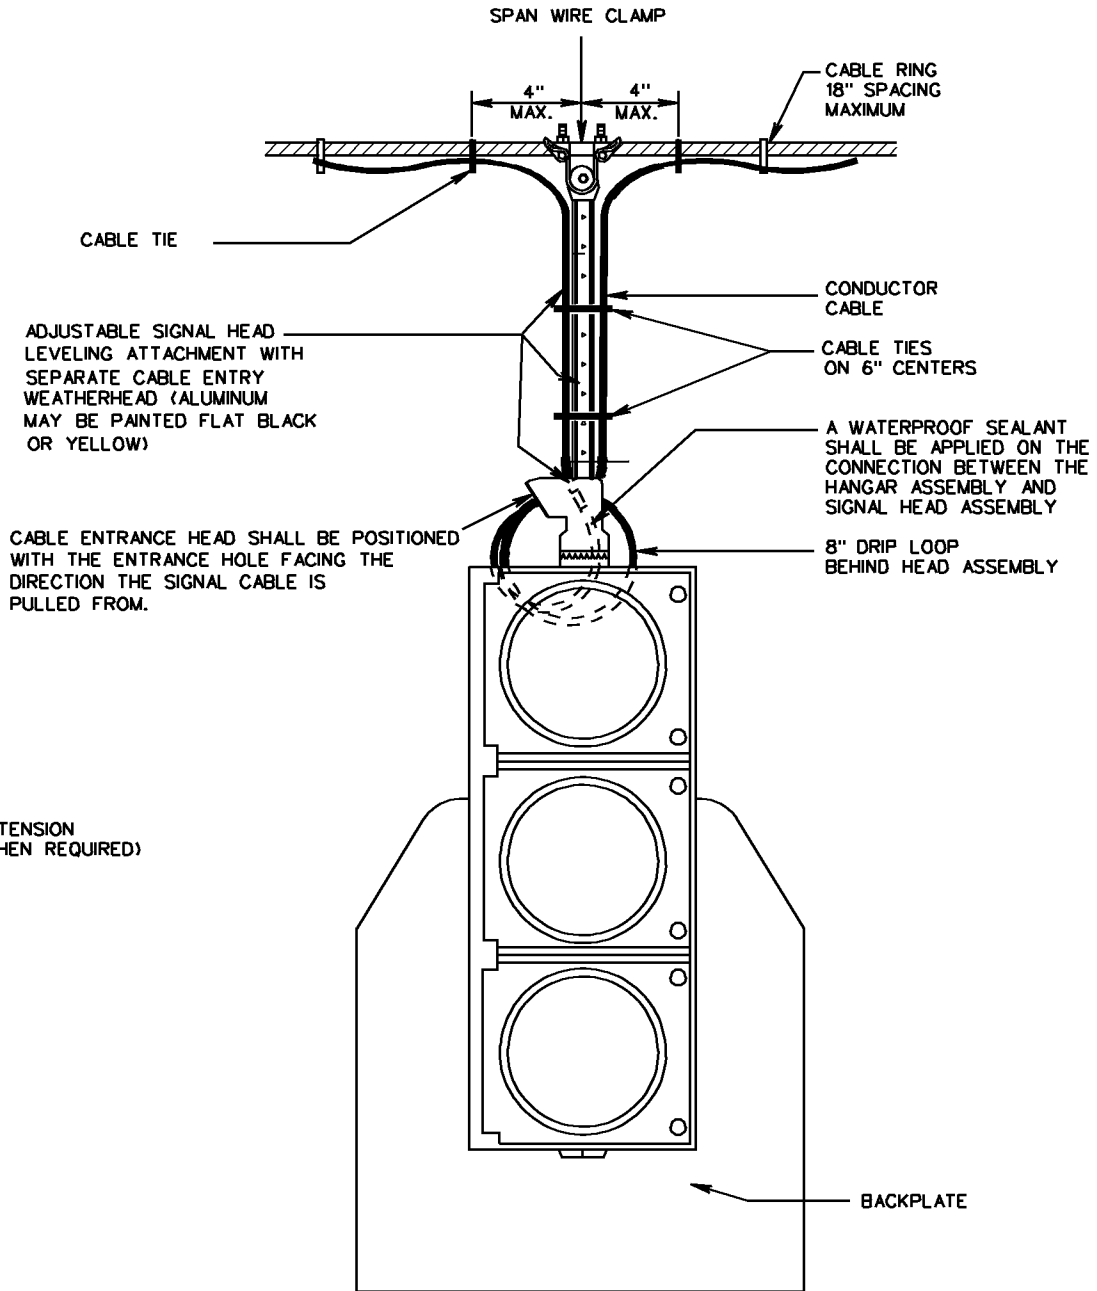

SIGNAL HEAD MOUNTING DETAILS  
SPAN WIRE

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

703



ROAD AND BRIDGE STANDARDS


SHEET 1 OF 1

REVISION DATE


1303.20

06-15-2009


POLE TOP MOUNTING CAST ALUMINUM  
SIGNAL HEADS ONLY

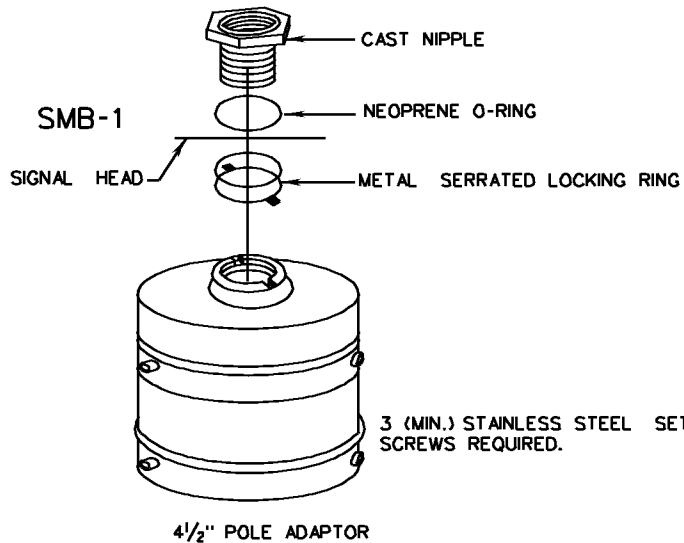

POLE TOP MOUNTING CAST ALUMINUM  
OR POLYCARBONATE SIGNAL HEADS

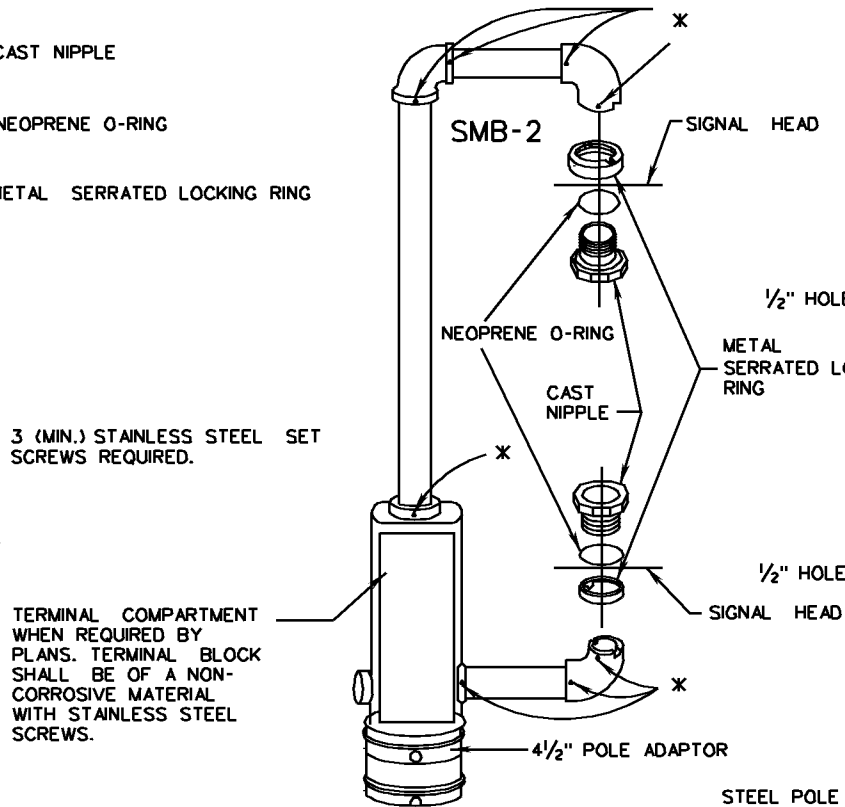

POLE BRACKET MOUNTING CAST ALUMINUM  
OR POLYCARBONATE SIGNAL HEADS

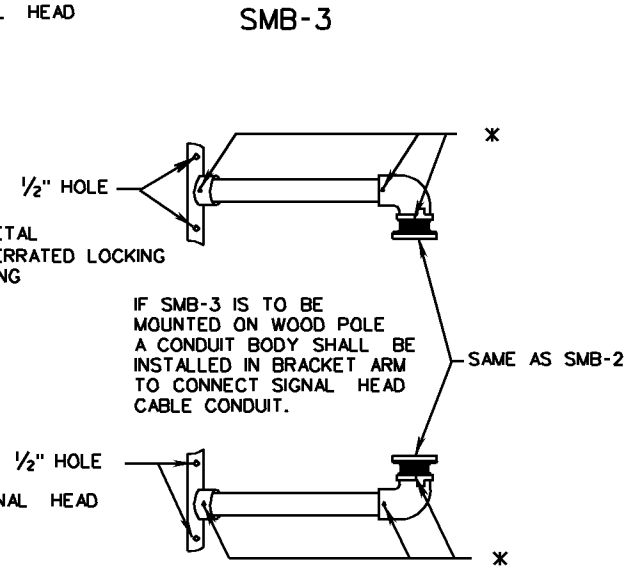

STEEL POLE SHALL BE DRILLED AND TAPPED AND MOUNTING ACCOMPLISHED UTILIZING 1/2" STAINLESS STEEL BOLTS.

**NOTES:**

IF PEDESTRIAN SIGNALS ARE BEING INSTALLED, THE MOUNTING ATTACHMENTS (SMB-1,2,3) SHALL BE A TYPE SPECIFICALLY MANUFACTURED FOR THAT PURPOSE.

SMB-1, 2 AND 3 SHOWN ARE TYPICAL AND FOR ONE-WAY SIGNAL DISPLAY. OTHER DESIGNS MAY BE SUBMITTED FOR APPROVAL BY THE ENGINEER. MULTI-WAY ASSEMBLIES, WHEN REQUIRED, SHALL BE OF SIMILAR APPROPRIATE DESIGN.

SMB-3 BRACKETS MAY BE MOUNTED TO POLE WITH STAINLESS STEEL BANDS

\* SET SCREWS SHALL BE STAINLESS STEEL



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

1303.40

06-15-2009



**SIGNAL HEAD MOUNTING DETAILS**

**POLE TOP AND BRACKET**

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

703

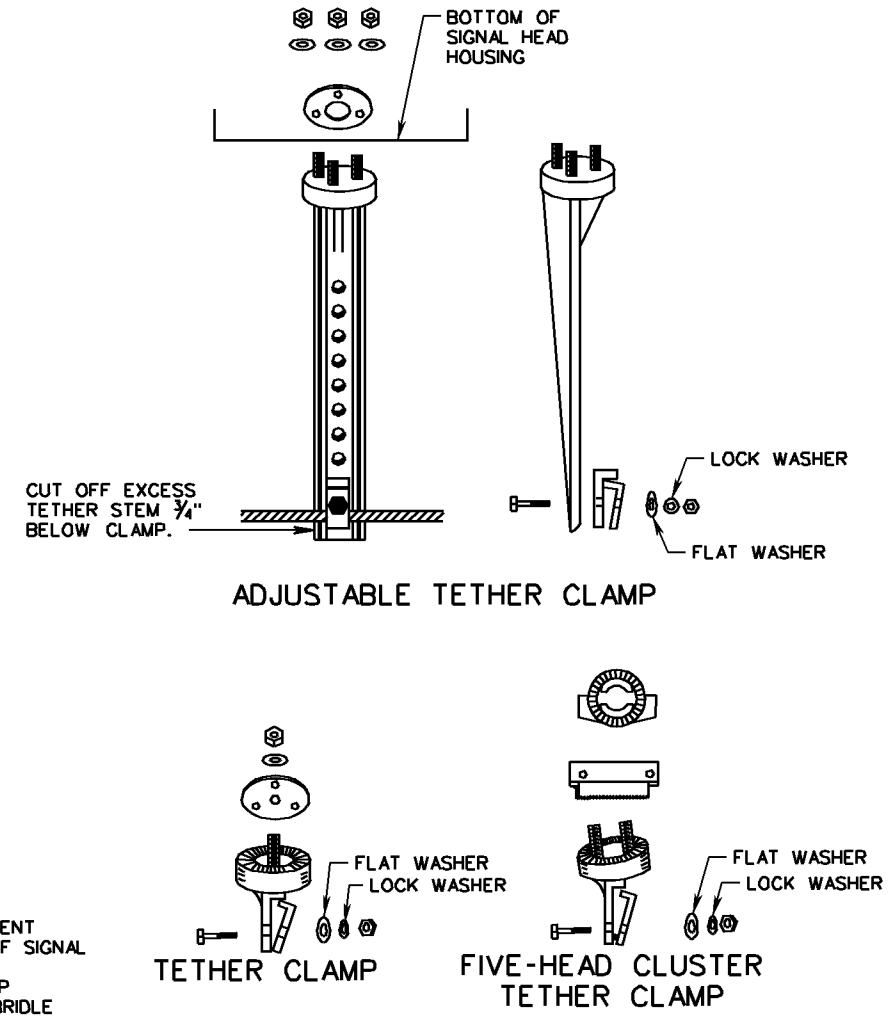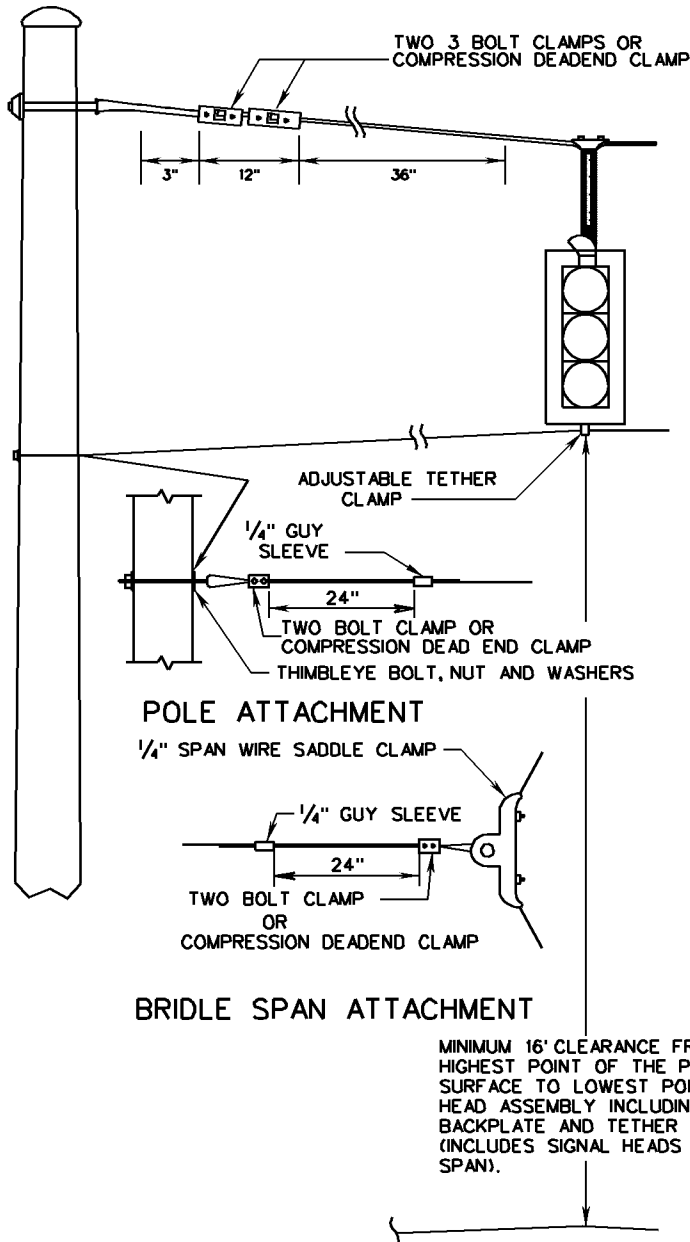

SPECIFICATION REFERENCE
703


# TETHER WIRE DETAILS

VIRGINIA DEPARTMENT OF TRANSPORTATION


<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1304.10

SPAN WIRE INSTALLATION



MAST ARM INSTALLATION

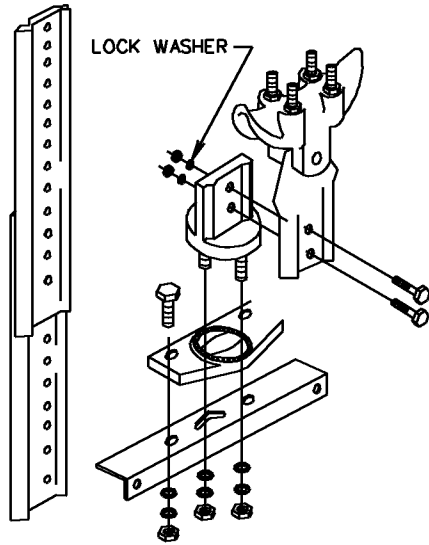

EXTENSION SHALL BE USED WITH THE HANGER AND TETHER ASSEMBLY TO CENTER THE SIGN WITH THE SIGNAL HEADS.

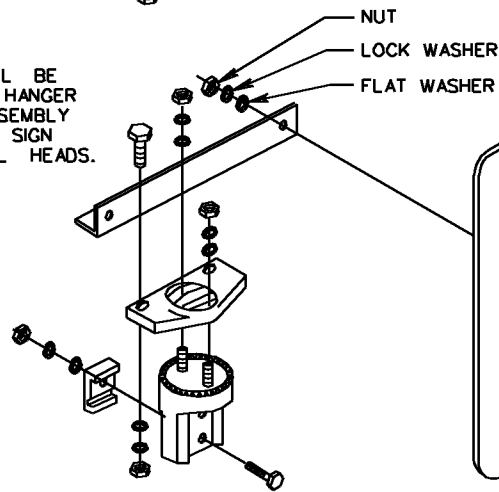

SMD-1

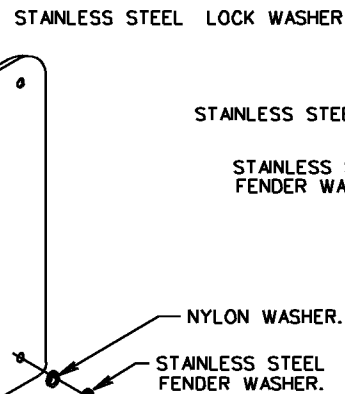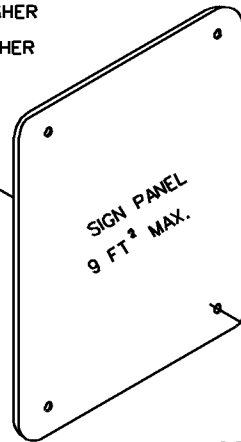


NOTES:

NUTS AND BOLTS USED FOR ATTACHMENT OF SIGN PANEL SHALL BE STAINLESS STEEL AND 3/4" IN DIAMETER.

A 1 1/4" NYLON AND STAINLESS STEEL FENDER WASHER SHALL BE USED ON THE FRONT OF SIGN PANEL WHERE BOLT PASSES THROUGH SIGN PANEL.

ALL NUTS, BOLTS AND WASHERS SHALL BE STAINLESS STEEL OR GALVANIZED STEEL UNLESS OTHERWISE INDICATED

SPACERS SHALL BE INSTALLED BETWEEN THE EYELET OF THE SIGN HANGAR AND THE SPAN WIRE CLAMP TO ELIMINATE ANY GAP.

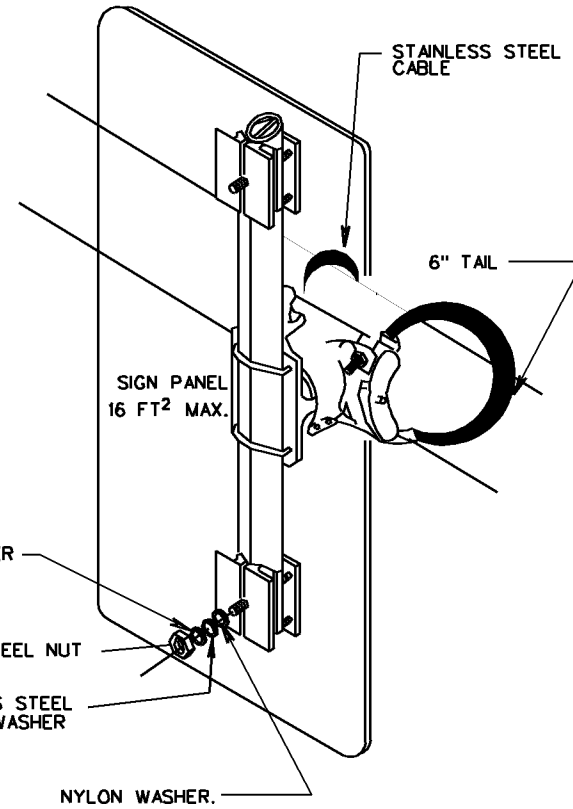

SMD-2



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

1305.10


06-15-2009

SIGN MOUNTING DETAILS

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE


703

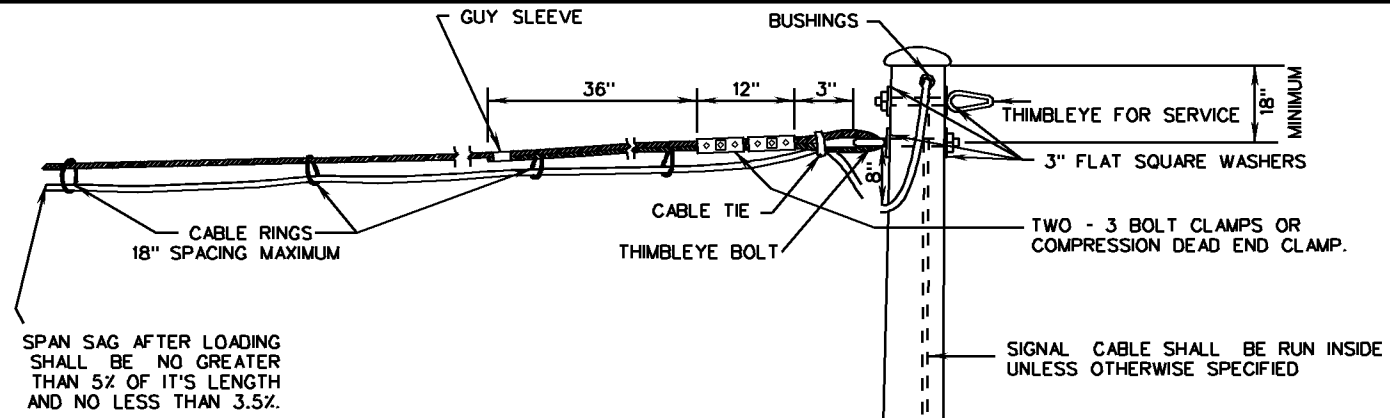

SPAN SAG AFTER LOADING SHALL BE NO GREATER THAN 5% OF IT'S LENGTH AND NO LESS THAN 3.5%.

**NOTES:**

- REFER TO STANDARD MP-2 FOR GROUNDING LUG DETAIL.
- CONCRETE PAD REQUIRED WHEN CABINET MOUNTED ON POLE IN EARTH AREAS.
- FOR METHODS APPROVED FOR CABLE RUNS, SEE STANDARD WD-2.
- POLE HEIGHT DESIGNED TO ACCOMMODATE ATTACHING SPAN ACROSS THE GREATEST DISTANCE AT A POINT 18" FROM THE TOP OF THE POLE. SPANS CROSSING A LESSOR DISTANCE AND ATTACHED TO THE SAME POLE SHALL BE ATTACHED LOWER THAN 18" AS WILL RESULT IN THE LOWEST SIGNAL HEAD SECTION MAINTAINING THE MINIMUM CLEARANCE, AS SHOWN BY STANDARD MP-2.
- A STRAIN INSULATOR(S) MAY BE USED TO EXTEND THE LENGTH OF EXISTING SPAN WIRE IF A SPAN PULL IS TO BE MODIFIED.

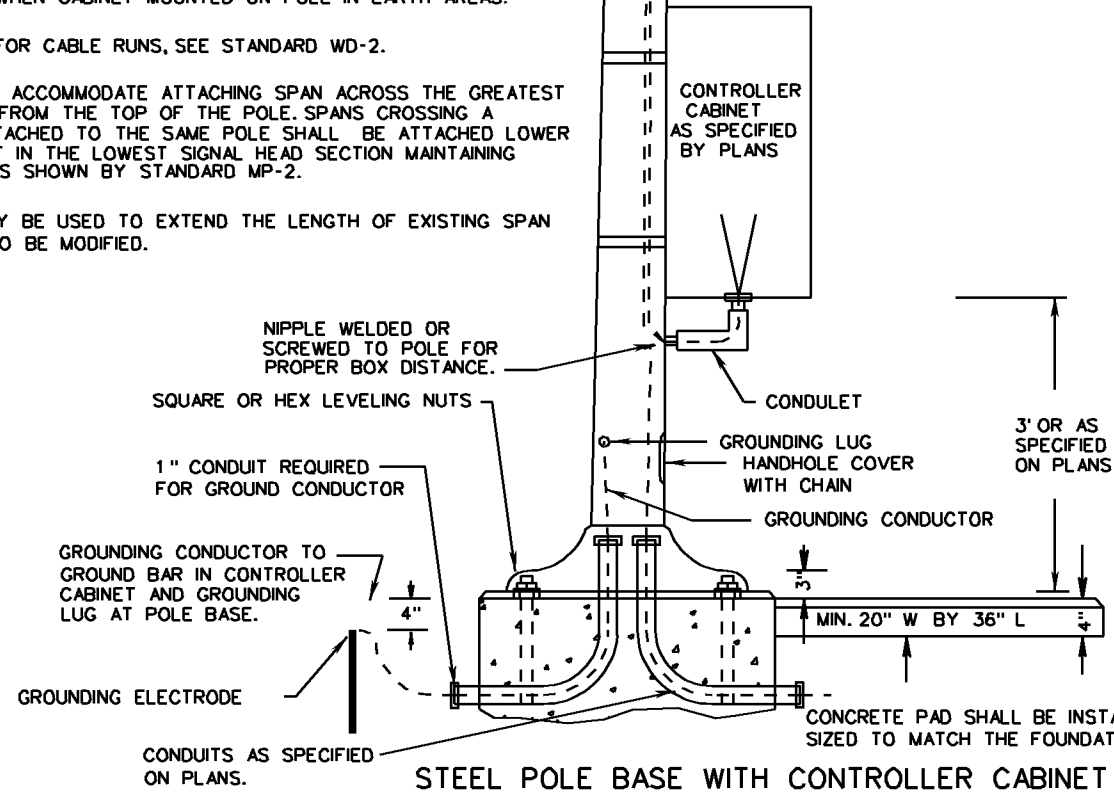

STEEL POLE BASE WITH CONTROLLER CABINET


SPECIFICATION REFERENCE
700

## STEEL SIGNAL POLE WIRING AND RIGGING DETAILS

VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1306.10



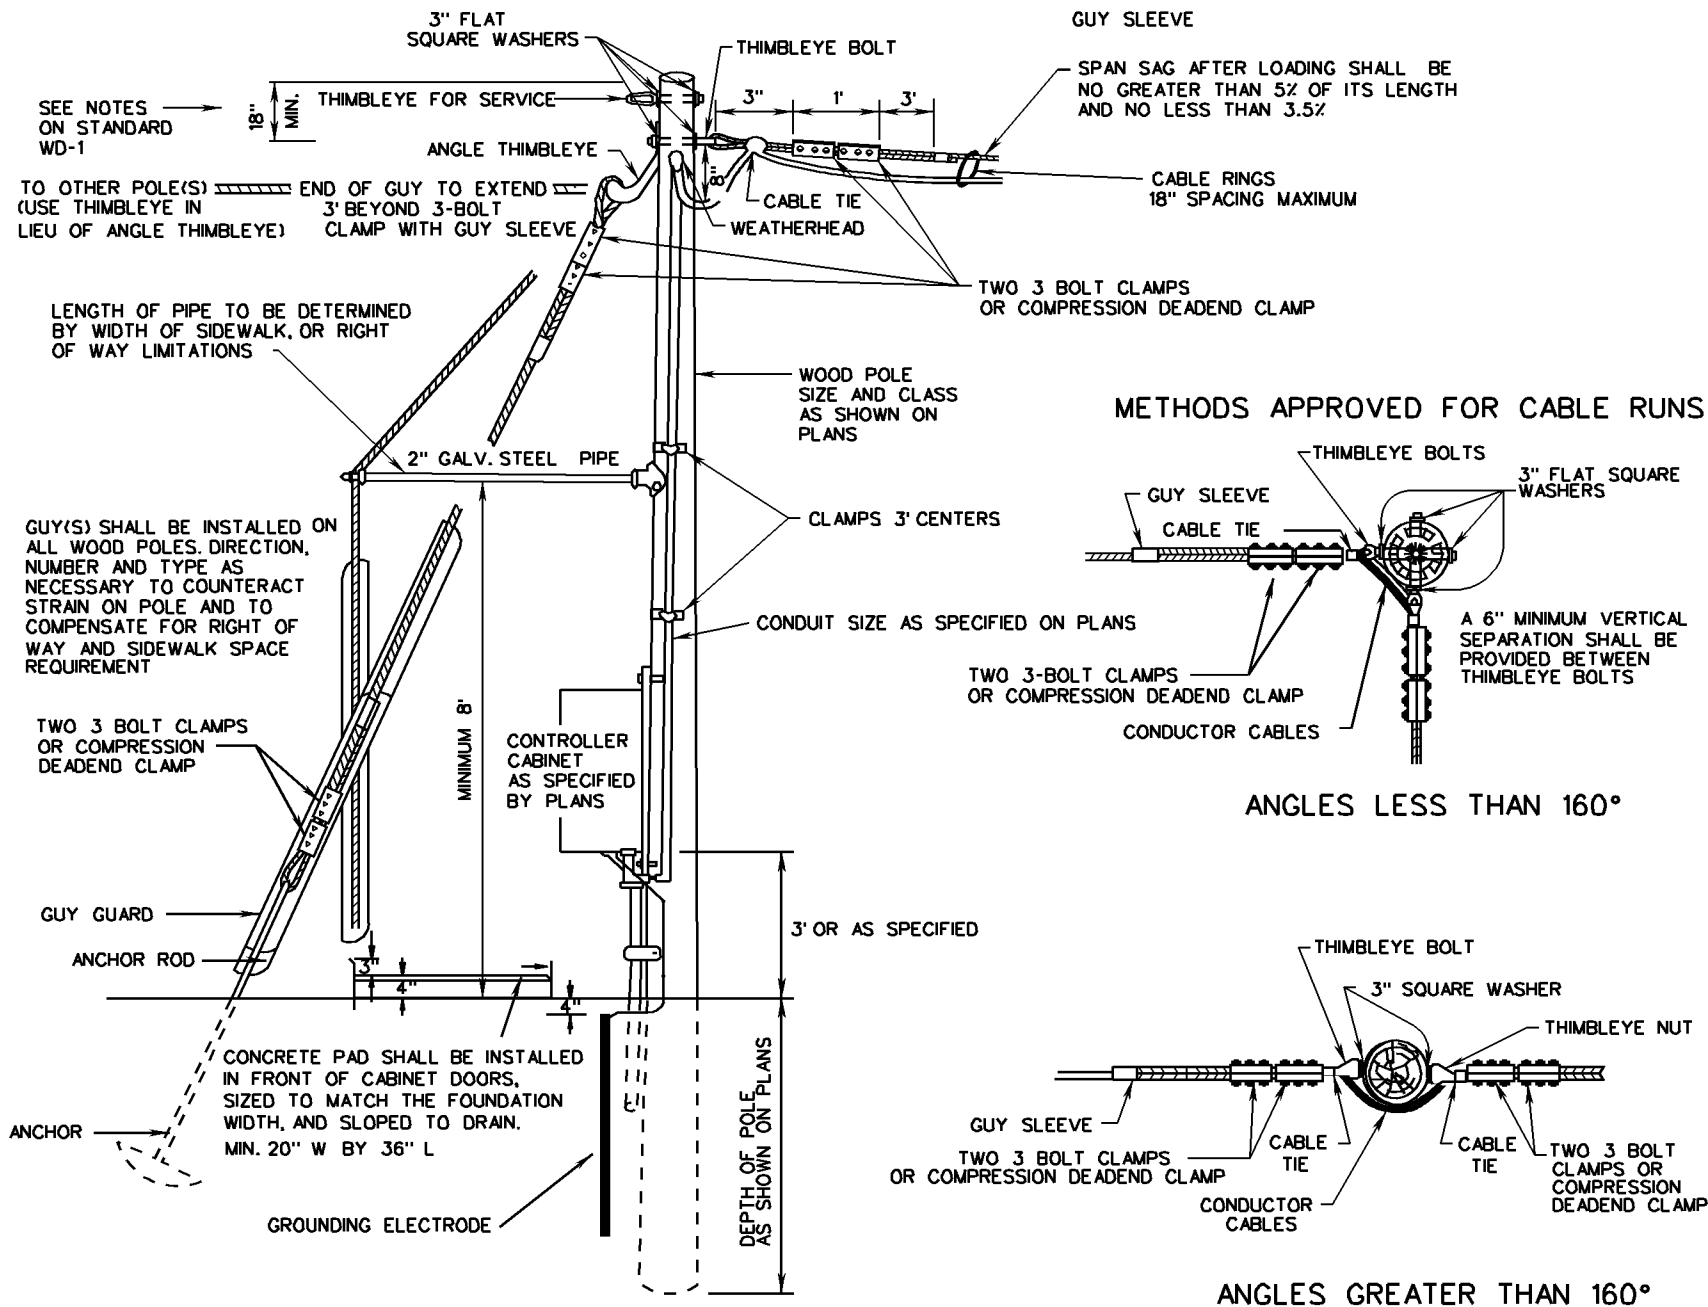

ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

1306.20


06-15-2009

# WOOD POLE WIRING AND RIGGING DETAILS


VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE


700  
703

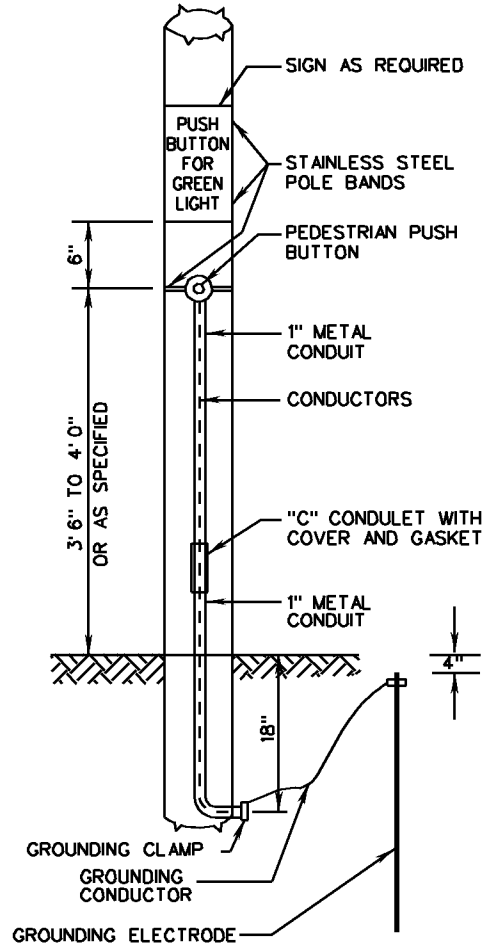

PA-1  
WOOD/CONCRETE POLE

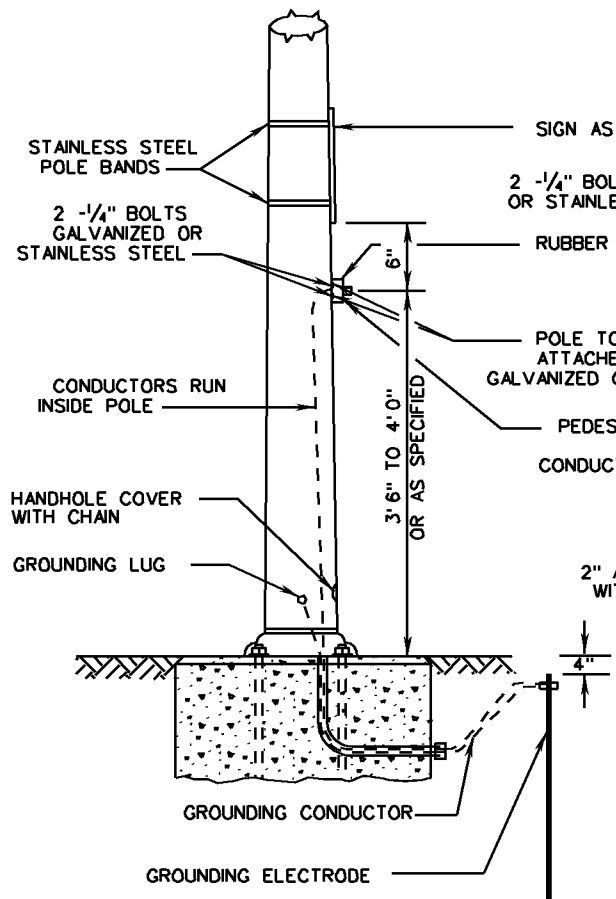

PA-2  
SIGNAL/PEDESTAL POLE

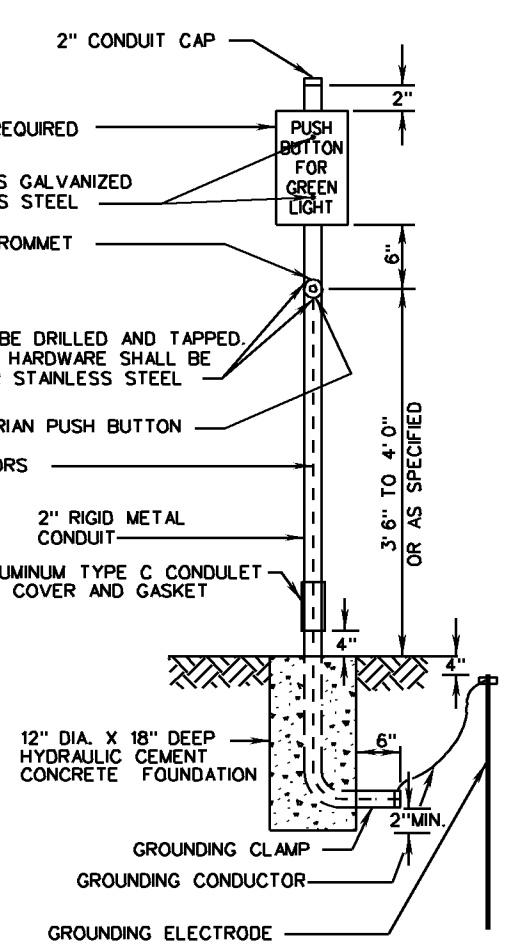

PA-3  
METAL

NOTE:


REFER TO STANDARD MP-2 FOR GROUNDING LUG DETAIL.  
"C" CONDULET WITH GASKET AND COVER.

SPECIFICATION REFERENCE
700 703

PEDESTRAIN ACTUATION  
DETAILS

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT ROAD AND BRIDGE STANDARDS	
REVISION DATE 04/09 06-15-2009	SHEET 1 OF 1 1307.10

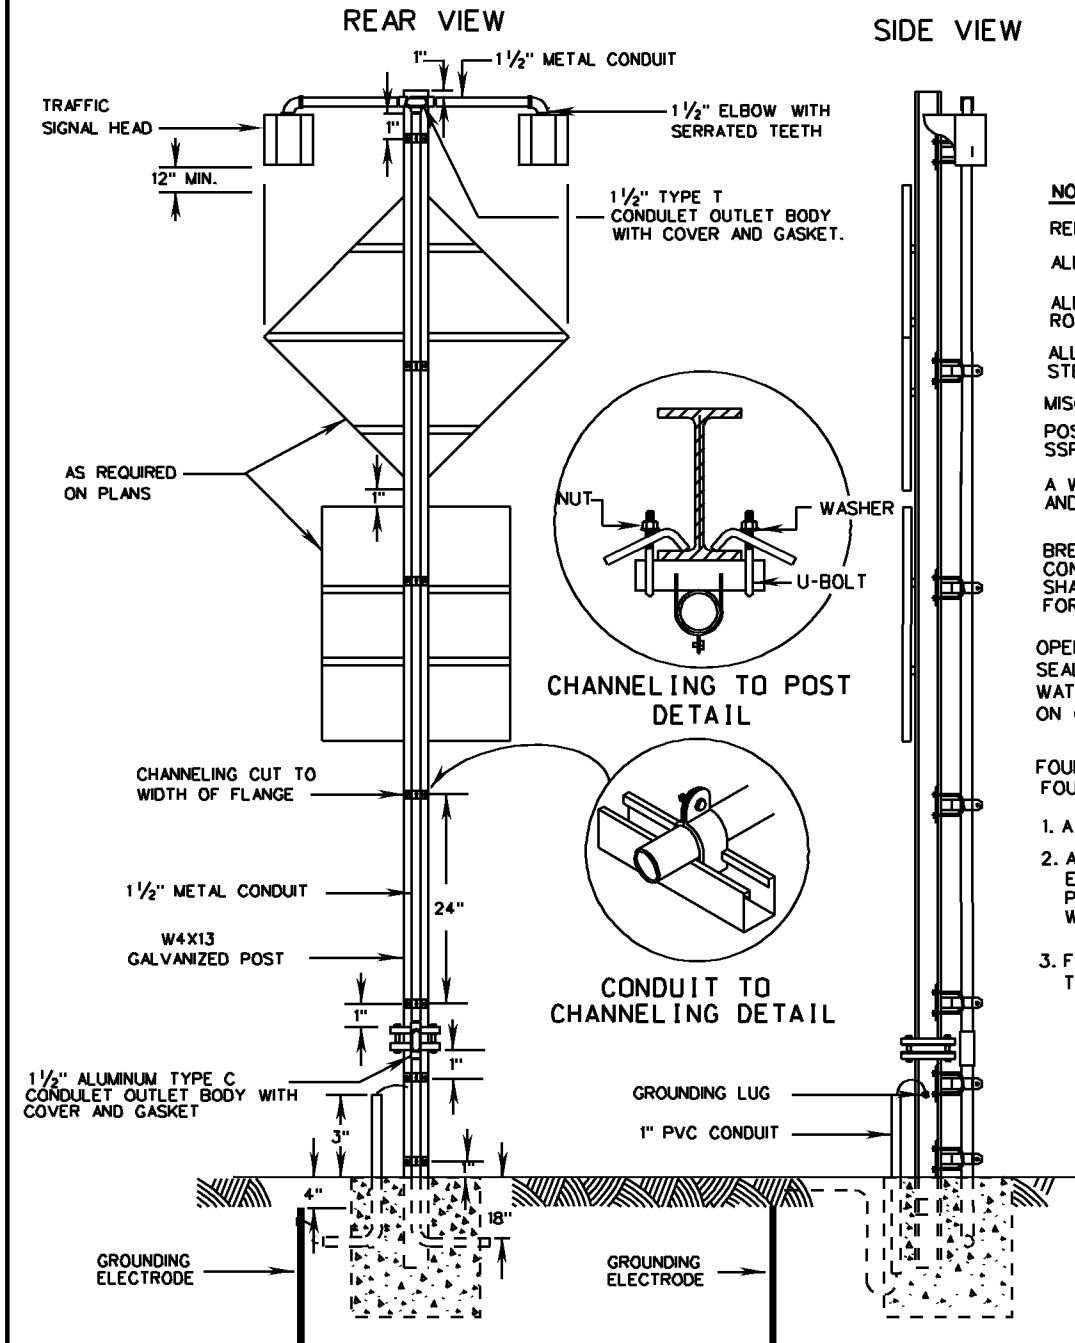

- NOTES:**
- REFER TO STANDARD MP-2 FOR GROUNDING LUG DETAIL.
  - ALL SIGNAL LENSES SHALL BE YELLOW AND SHALL BE 12" DIAMETER.
  - ALL ELBOWS AND CONDULETS SHALL HAVE SET SCREWS TO PREVENT ROTATION.
  - ALL CHANNELING AND CLAMPS SHALL BE GALVANIZED OR STAINLESS STEEL.
  - MISCELLANEOUS HARDWARE SHALL BE STAINLESS STEEL.
  - POST AND SIGN PANELS SHALL BE INSTALLED IN ACCORDANCE WITH SSP-VA
  - A WATERPROOF SEALANT SHALL BE UTILIZED BETWEEN ELBOWS AND SIGNAL HEADS.
  - BREAKAWAY CONNECTORS SHALL BE INSTALLED ON THE SIGNAL CONDUCTORS WITH THE TYPE C CONDULET. BREAKAWAY CONNECTORS SHALL BE FUSED FOR THE HOT CONDUCTOR AND NONFUSED FOR THE GROUND CONDUCTOR.
  - OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE, WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS ON CABLE COVERINGS
  - FOUNDATION SHALL BE IN ACCORDANCE WITH SSP-VA FOR A 4'6" X 1'9" FOUNDATION EXCEPT FOR THE FOLLOWING:
    1. A 1 1/2" METAL CONDUIT SHALL BE INSTALLED FOR ELECTRICAL POWER.
    2. A 1" PVC CONDUIT, NO. 6 GROUNDING CONDUCTOR AND GROUNDING ELECTRODE SHALL BE INSTALLED FOR GROUNDING PURPOSES. STUB POST SHALL BE SUPPLIED WITH A GROUNDING LUG WELDED TO POST WEB.
    3. FLASHING BEACON INSTALLED ON UNDIVIDED HIGHWAYS SHALL BE OF THE MEDIAN TYPE INSTALLED IN ACCORDANCE WITH STANDARD SSP-VA.

SPECIFICATION REFERENCE
700 703

**FLASHING BEACON  
INSTALLATION DETAILS**

VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1309.10

TOP VIEW

OPTION: TOP 12" MIN. OF THE FOUNDATION MAY BE FORMED SQUARE

BOLT CIRCLE

GROUNDING ELECTRODE

6"

BOLT PROJECTION AS REQUIRED BY SIGNAL POLE MANUFACTURER, HOWEVER DISTANCE BETWEEN BOTTOM OF BASE PLATE AND TOP OF PEDESTAL SHALL BE NO GREATER THAN THE DIAMETER OF ANCHOR BOLT PLUS ONE INCH.

SQUARE OR HEX NUTS UNDER BASE CASTING SERVE AS A MEANS OF LEVELING OR RAKING POLE

CONDUITS TO EXTEND 8" ABOVE FOUNDATION

ALL CONDUITS AS SPECIFIED ON PLANS. IN ADDITION ONE 1" CONDUIT REQUIRED FOR GROUNDING CONDUCTOR. 2 - 2" PVC CONDUITS REQUIRED FOR FUTURE USE. NOTE THAT ADDITIONAL SPARE CONDUITS MAY BE REQUIRED BY PLANS

GROUNDING CONDUCTOR

GROUNDING ELECTRODE

FOUNDATION TO EXTEND 4" ABOVE GROUND WHEN IN EARTH AND SHALL BE FLUSH WITH SURFACE WHEN IN SIDEWALK.

WELDED WIRE FABRIC AS REQUIRED BY FOUNDATION DESIGNER

HYDRAULIC CEMENT CONCRETE

ANCHOR RODS/BOLTS

NOTES:

ANCHOR BOLTS AND BOLT PATTERN SHALL BE FURNISHED WITH POLE. POLE SHALL BE CENTERED ON FOUNDATION.

EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUITS PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE 1/4" DEEP AND 4" TO 6" LONG. LOCATIONS OF EMPTY CONDUITS SHALL HAVE AN ADDITIONAL 2" LONG MARK MADE PERPENDICULAR TO AND CENTERED ON THIS MARKING.

WHEN FOUNDATION EXTENDS 4" ABOVE FINISHED GRADE ALL EDGES SHALL BE CHAMFERED 3/4" AND FOR SIDEWALKS SHALL BE FLUSH.

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

NO MORTAR, GROUT, OR CONCRETE SHALL BE PLACED BETWEEN BOTTOM OF BASE PLATE AND TOP OF FOUNDATION.

HEIGHT, WIDTH, AND DEPTH OF FOUNDATION SHALL BE AS REQUIRED BY FOUNDATION DESIGNER

SIDE VIEW

CIRCULAR FOUNDATION



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

1310.10

06-15-2009


SIGNAL POLE FOUNDATION

INSTALLATION DETAILS

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

700

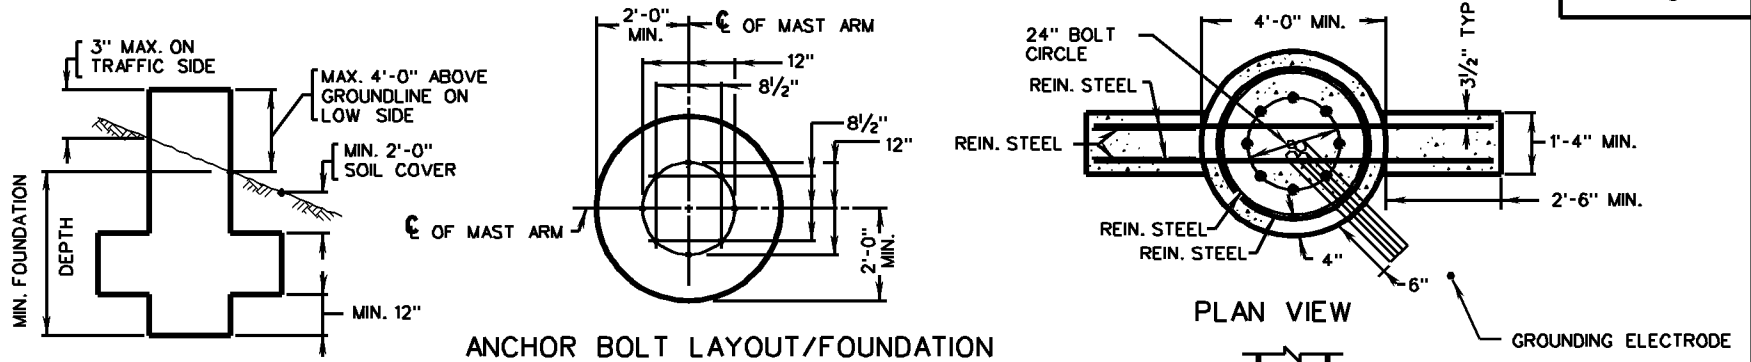

ANCHOR BOLT LAYOUT/FOUNDATION

**NOTES:**

ANCHOR BOLTS SHALL HAVE A THREADED PLATE OR A PLATE WITH NUT AND WASHER ON THE END OF BOLT EMBEDDED IN FOUNDATION.

ANCHOR BOLT LAYOUT SHALL BE CHECKED AGAINST LATEST APPROVED STRUCTURE DRAWINGS. WHEN EIGHT ANCHOR BOLTS ARE REQUIRED, MINIMUM OF 5'-0" AND 7'-6" EMBEDMENT LENGTHS SHALL BE USED ALTERNATING IN BOLT CIRCLE.

MINIMUM REINFORCEMENT SHOWN, DESIGNER SHALL VERIFY.

ALL CONDUITS AS SPECIFIED ON PLANS. IN ADDITION 1" CONDUIT REQUIRED FOR GROUNDING CONDUCTOR, 2 - 2" PVC CONDUITS REQUIRED FOR FUTURE USE. NOTE THAT ADDITIONAL SPARE CONDUITS MAY BE REQUIRED BY PLANS.

BOLT PROJECTION AS REQUIRED BY SIGNAL POLE MANUFACTURER; HOWEVER, DISTANCE BETWEEN BOTTOM OF BASE PLATE AND TOP OF PEDESTAL SHALL BE NO GREATER THAN THE DIAMETER OF ANCHOR BOLT PLUS ONE INCH.

SQUARE OR HEX NUTS UNDER BASE SERVE AS A MEANS OF LEVELING OR RAKING POLE.

WINGS SHALL BE USED FOR TORSIONAL RESISTANCE.

ANCHOR BOLTS AND BOLT PATTERN SHALL BE FURNISHED WITH POLE. POLE SHALL BE CENTERED ON FOUNDATION.

EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUITS PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE 1/4" DEEP AND 4" TO 6" LONG. LOCATIONS OF EMPTY CONDUITS SHALL HAVE AN ADDITIONAL 2" LONG MARK MADE PERPENDICULAR TO AND CENTERED ON THIS MARKING.

WHEN FOUNDATION EXTENDS 4" ABOVE FINISHED GRADE ALL EDGES SHALL BE CHAMFERED 3/4" AND FOR SIDEWALKS SHALL BE FLUSH.

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.


EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

NO MORTAR, GROUT, OR CONCRETE SHALL BE PLACED BETWEEN BOTTOM OF BASE PLATE AND TOP OF FOUNDATION.

HEIGHT, WIDTH, AND DEPTH OF FOUNDATION SHALL BE AS REQUIRED BY FOUNDATION DESIGNER

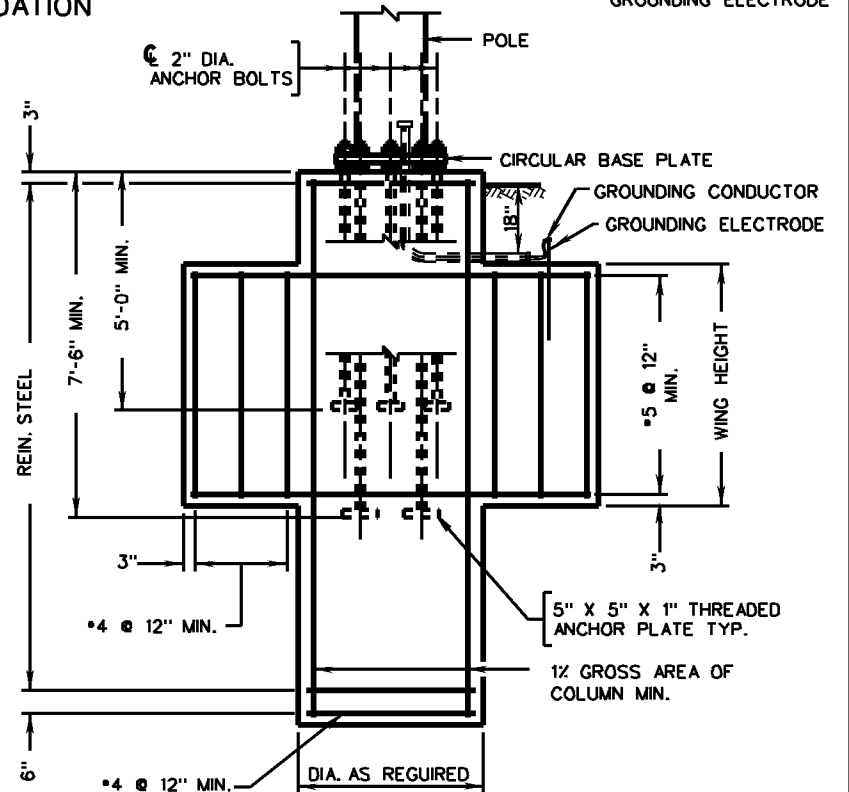


ELEVATION




CAGE REINFORCING STEEL


SPECIFICATION REFERENCE	700	<b>SIGNAL POLE FOUNDATION</b>		<b>VDOT</b>	
		INSTALLATION DETAILS		ROAD AND BRIDGE STANDARDS	
		VIRGINIA DEPARTMENT OF TRANSPORTATION		REVISION DATE NEW 04/09 06/15/2009	SHEET 1 OF 1  1310.11

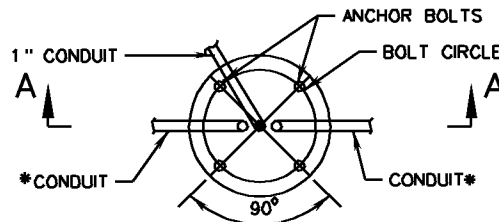

PLAN VIEW

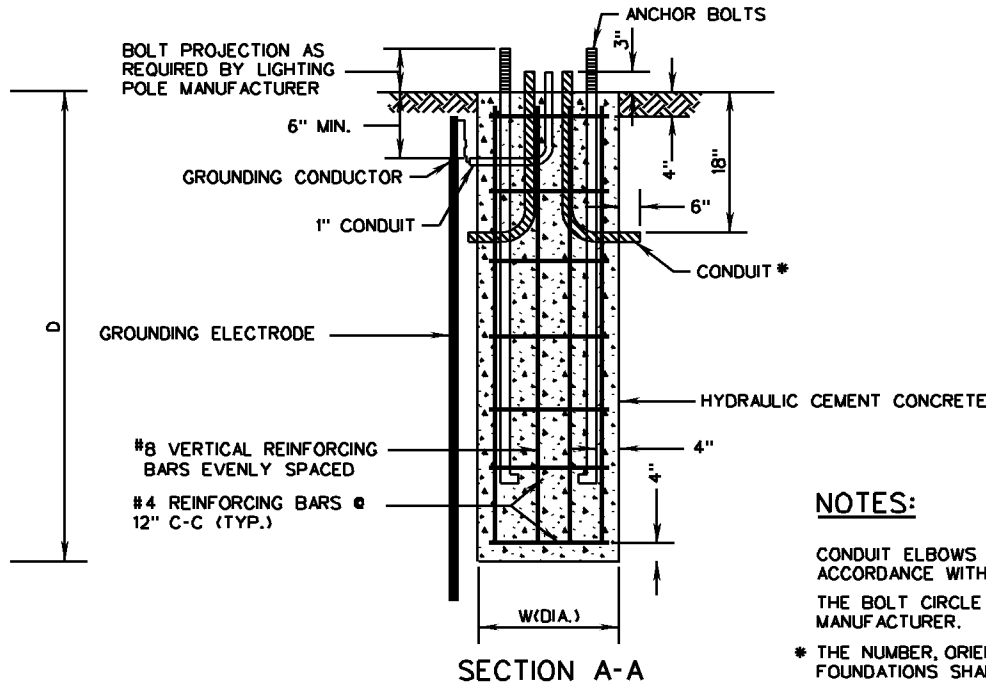

SECTION A-A

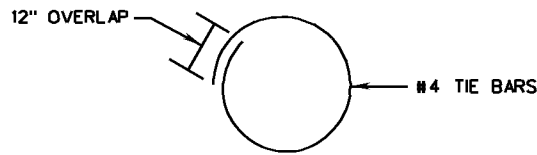

PLAN VIEW

TYPE	W	D	VERTICAL BARS
A	2' 6"	8'	8 - # 8


**NOTES:**

- CONDUIT ELBOWS SHALL HAVE A 90° BEND. THE BEND RADIUS SHALL BE IN ACCORDANCE WITH THE N.E.C.
- THE BOLT CIRCLE TEMPLATE SHALL BE FURNISHED BY THE LIGHTING POLE MANUFACTURER.
- \* THE NUMBER, ORIENTATION AND SIZE OF CONDUITS ENTERING AND EXITING FOUNDATIONS SHALL BE AS SHOWN ON THE PLANS.
- NO MORTAR, GROUT, OR CONCRETE SHALL BE PLACED BETWEEN BOTTOM OF BASE PLATE AND TOP OF FOUNDATION.
- GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.
- EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.
- BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.
- OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

SPECIFICATION REFERENCE
700

**LIGHTING POLE FOUNDATION  
INSTALLATION DETAILS**  
VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1310.20

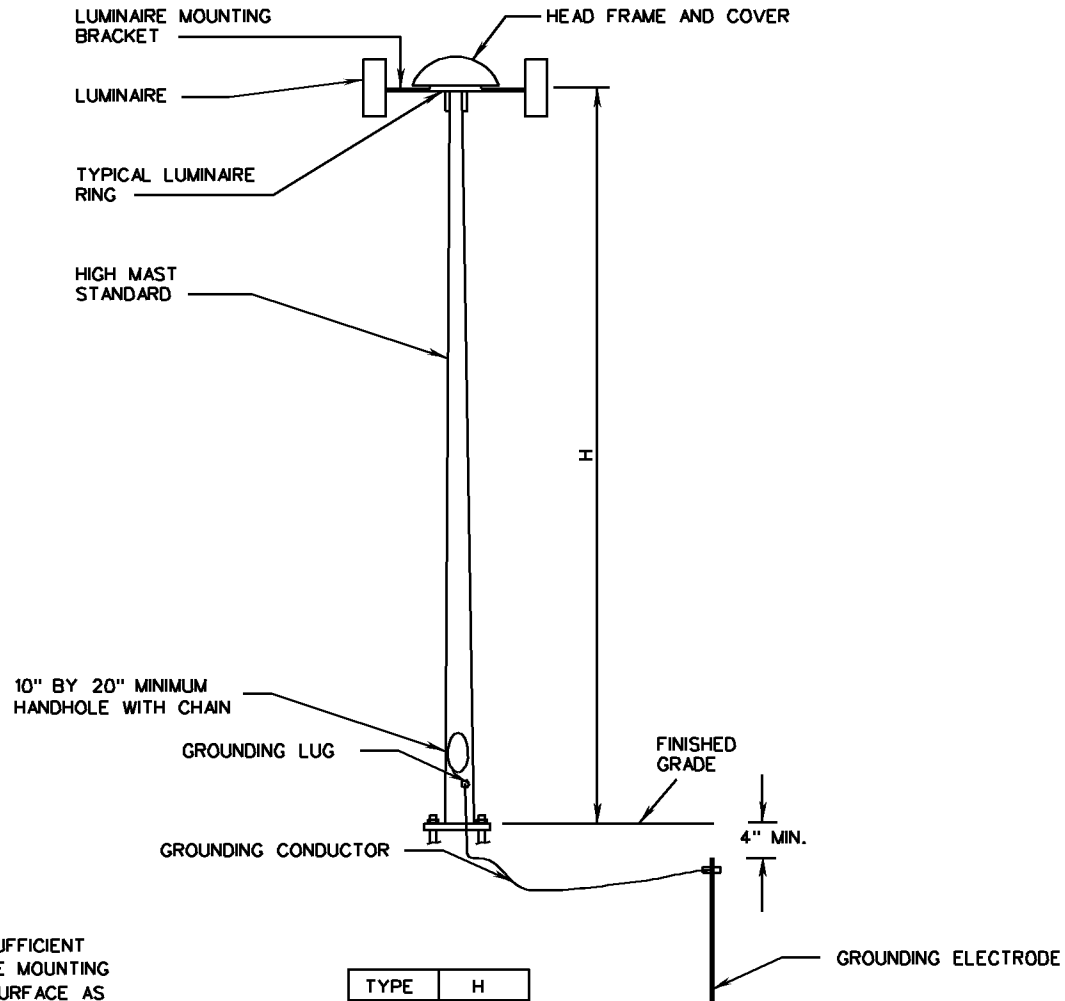

**NOTES:**

WINCH ASSEMBLY AND CIRCUIT BREAKER TO BE ACCESSIBLE FROM HAND HOLE

TYPE 9 POLES SHALL BE OF SUFFICIENT HEIGHT TO PROVIDE A LUMINAIRE MOUNTING HEIGHT ABOVE THE ROADWAY SURFACE AS INDICATED ON THE PLANS.

THE MOUNTING HEIGHTS SHOWN ON THE PLANS FOR A TYPE 9 POLE SHALL BE ADHERED TO WITHIN A TOLERANCE OF 3 FEET AND IN NO CASE BE LESS THAN THE MOUNTING HEIGHT SHOWN.

REFER TO STANDARD MP-2 FOR GROUNDING LUG DETAIL.

TYPE	H
1	70'
2	80'
3	90'
4	100'
5	110'
6	120'
7	130'
8	140'
9	VARIABLE

SPECIFICATION REFERENCE

700  
705

# HIGH MAST LIGHT POLE DETAILS

VIRGINIA DEPARTMENT OF TRANSPORTATION

**VDOT**


ROAD AND BRIDGE STANDARDS

REVISION DATE

06-15-2009

SHEET 1 OF 1

1311.20

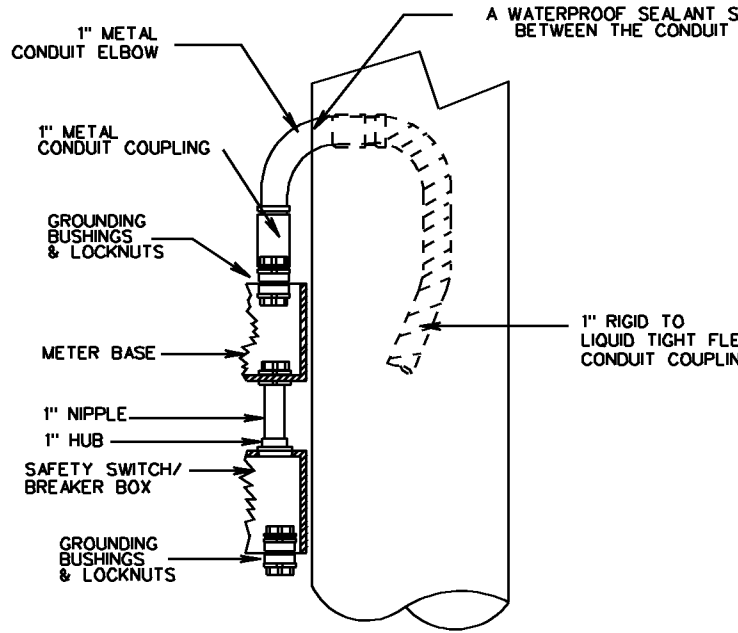


DETAIL FOR CONNECTION OF CONDUIT TO METER BASE

NOTES:

- NO OTHER CONDUCTORS SHALL BE RUN IN THE SAME CONDUIT WITH ELECTRICAL SERVICE CABLE.
- LOCAL POWER UTILITY COMPANY WILL INSTALL SERVICE CABLE FROM THEIR POWER SOURCE TO THE JUNCTION BOX AND MAKE REQUIRED SPLICES TO THE SERVICE CABLE COILED IN THE JUNCTION BOX.
- EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.
- CONCRETE PAD SHALL BE INSTALLED IN FRONT OF CABINET DOORS, SIZED TO MATCH THE FOUNDATION WIDTH, AND SLOPED TO DRAIN. (MIN. 20" W BY 36" L, 4" DEPTH)
- GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.
- BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.
- OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.
- THIS STANDARD IS APPLICABLE FOR ALL ELECTRICAL SERVICES OTHER THAN 480Y/277.
- POLE HEIGHT AND SIZE WILL BE AS SPECIFIED ON THE PLANS.
- REFER TO STANDARD MP-2 FOR GROUNDING LUG DETAIL.

JB-S1 JUNCTION BOX TOP OF JUNCTION BOX SHALL READ "UTILITY"

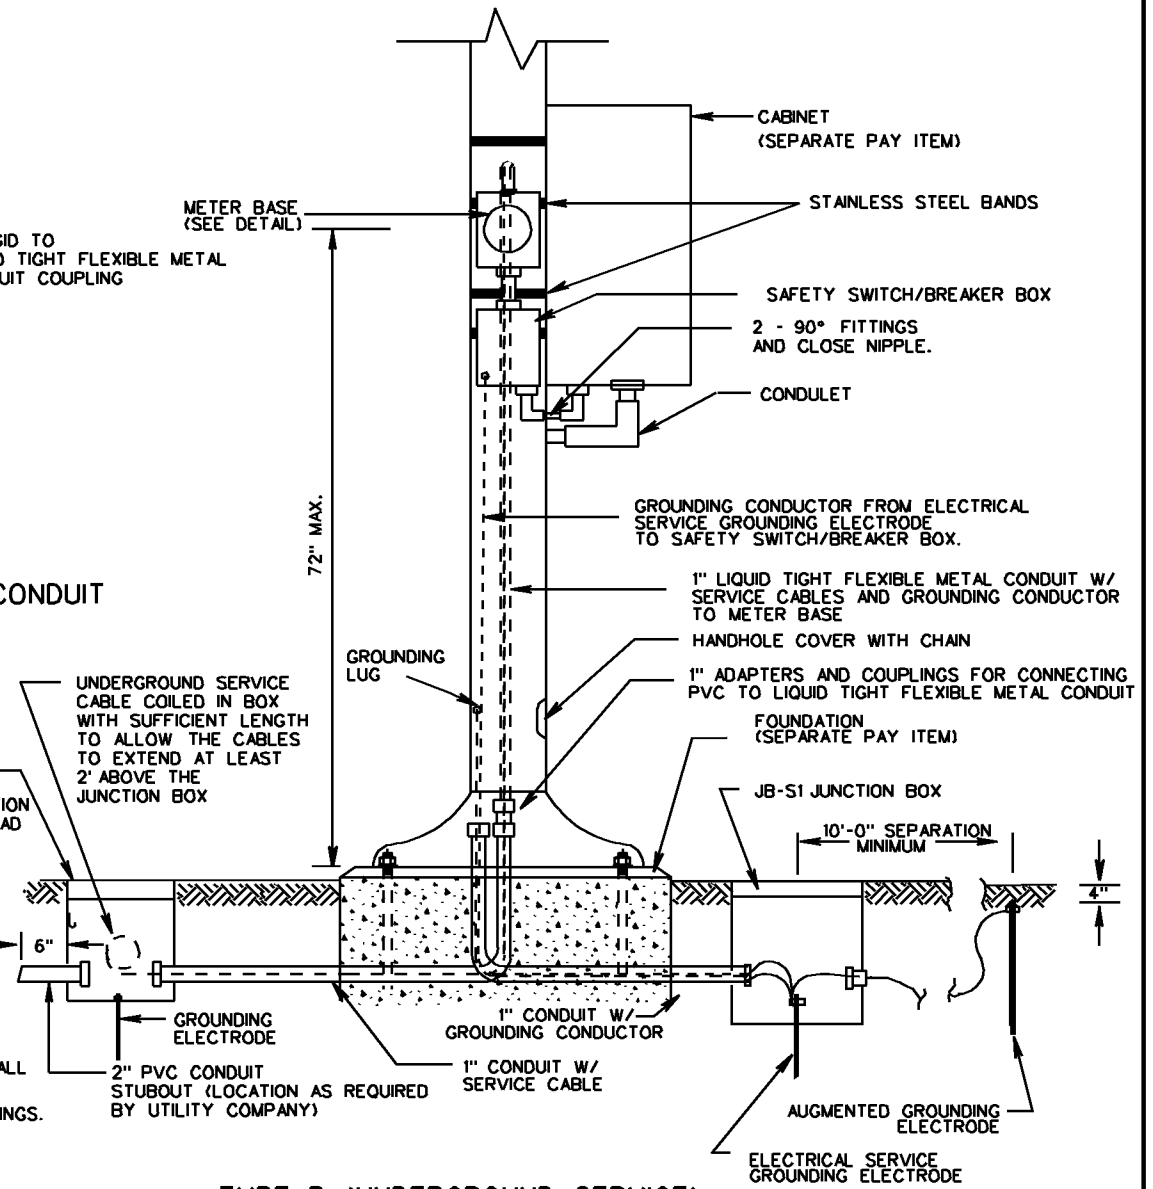


TYPE B (UNDERGROUND SERVICE) METAL POLE

SPECIFICATION REFERENCE
700

**ELECTRICAL SERVICE  
INSTALLATION DETAILS**  
VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 2 OF 2
06-15-2009	1312.11



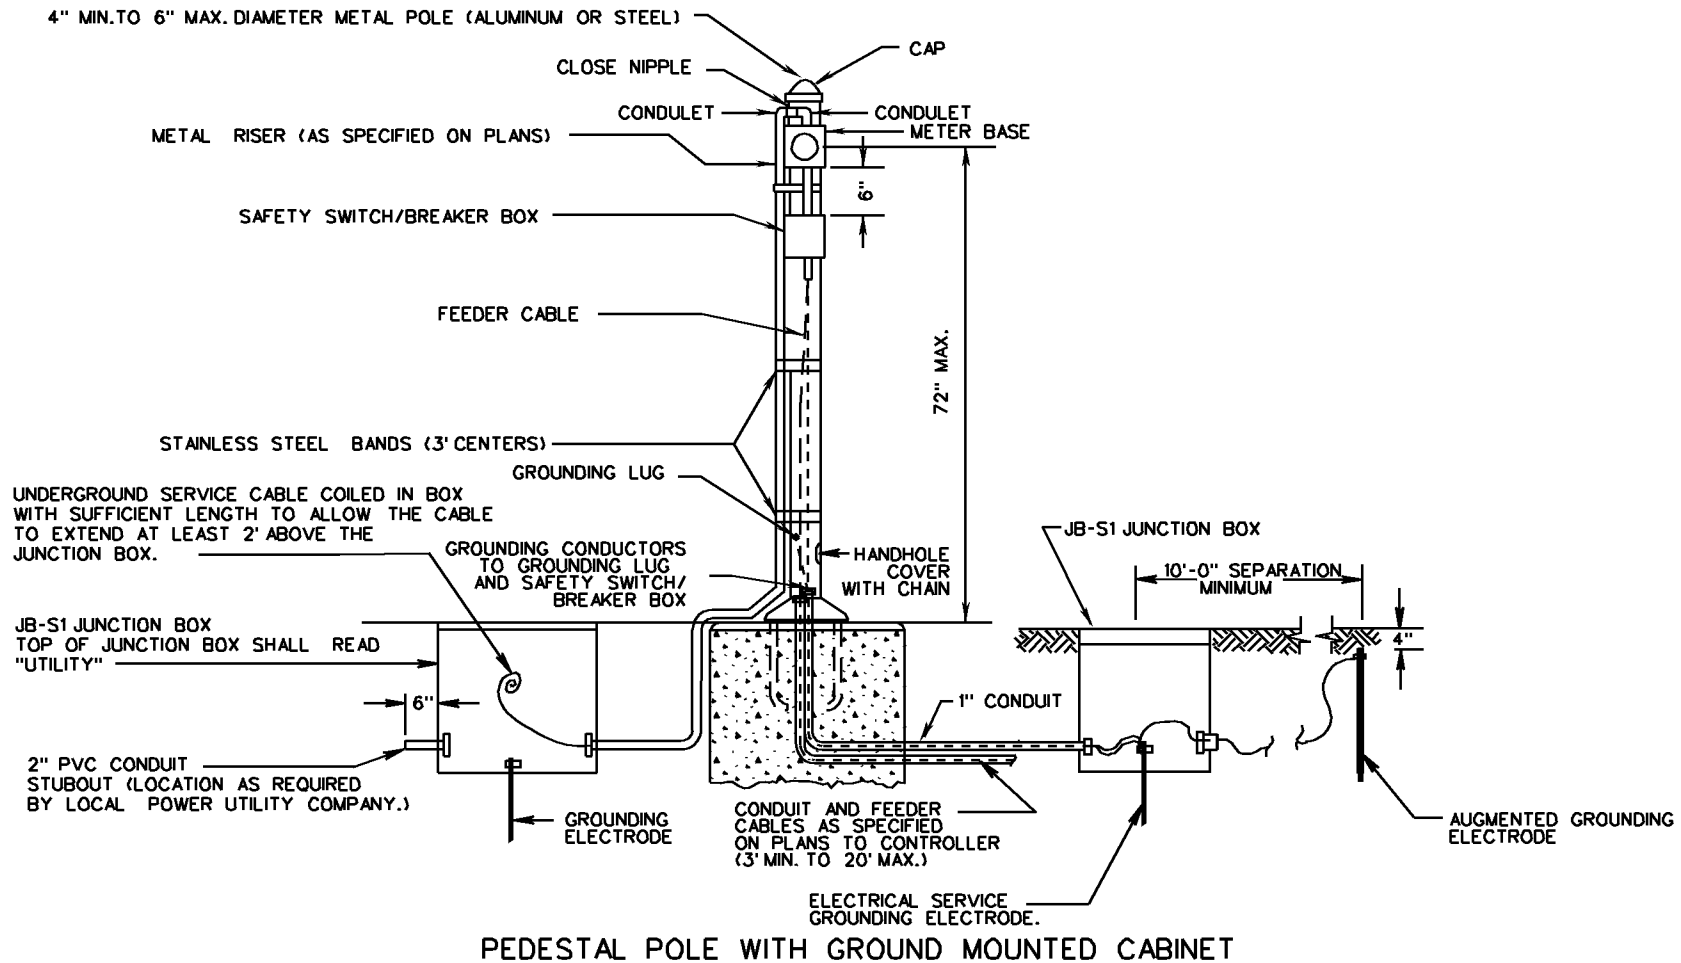

## NOTES:

NO OTHER CONDUCTORS SHALL BE RUN IN THE SAME CONDUIT WITH ELECTRICAL SERVICE CABLE.

LOCAL POWER UTILITY COMPANY WILL INSTALL SERVICE POWER UTILITY CABLE FROM THEIR POWER SOURCE TO THE JUNCTION BOX AND MAKE REQUIRED SPLICES TO THE SERVICE CABLE COILED IN THE JUNCTION BOX.

FOUNDATION SHALL BE CLASS A3 CONCRETE, 18" DIAMETER X 18" DEEP, AND COST OF FOUNDATION SHALL BE INCLUDED WITH THE PAY ITEM FOR ELECTRICAL SERVICE.

ANCHOR BOLTS AND BOLT CIRCLE TEMPLATE SHALL BE FURNISHED BY POLE MANUFACTURER.

THIS STANDARD IS APPLICABLE FOR ALL ELECTRICAL SERVICES OTHER THAN 480Y/277.

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.

STAINLESS STEEL BANDS REQUIRED FOR METER BASE AND SAFETY SWITCH/BREAKER BOX

REFER TO STANDARD MP-2 FOR GROUNDING LUG DETAILS.

VDOT

ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

1312.50


06-15-2009

ELECTRICAL SERVICE  
INSTALLATION DETAILS

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

700

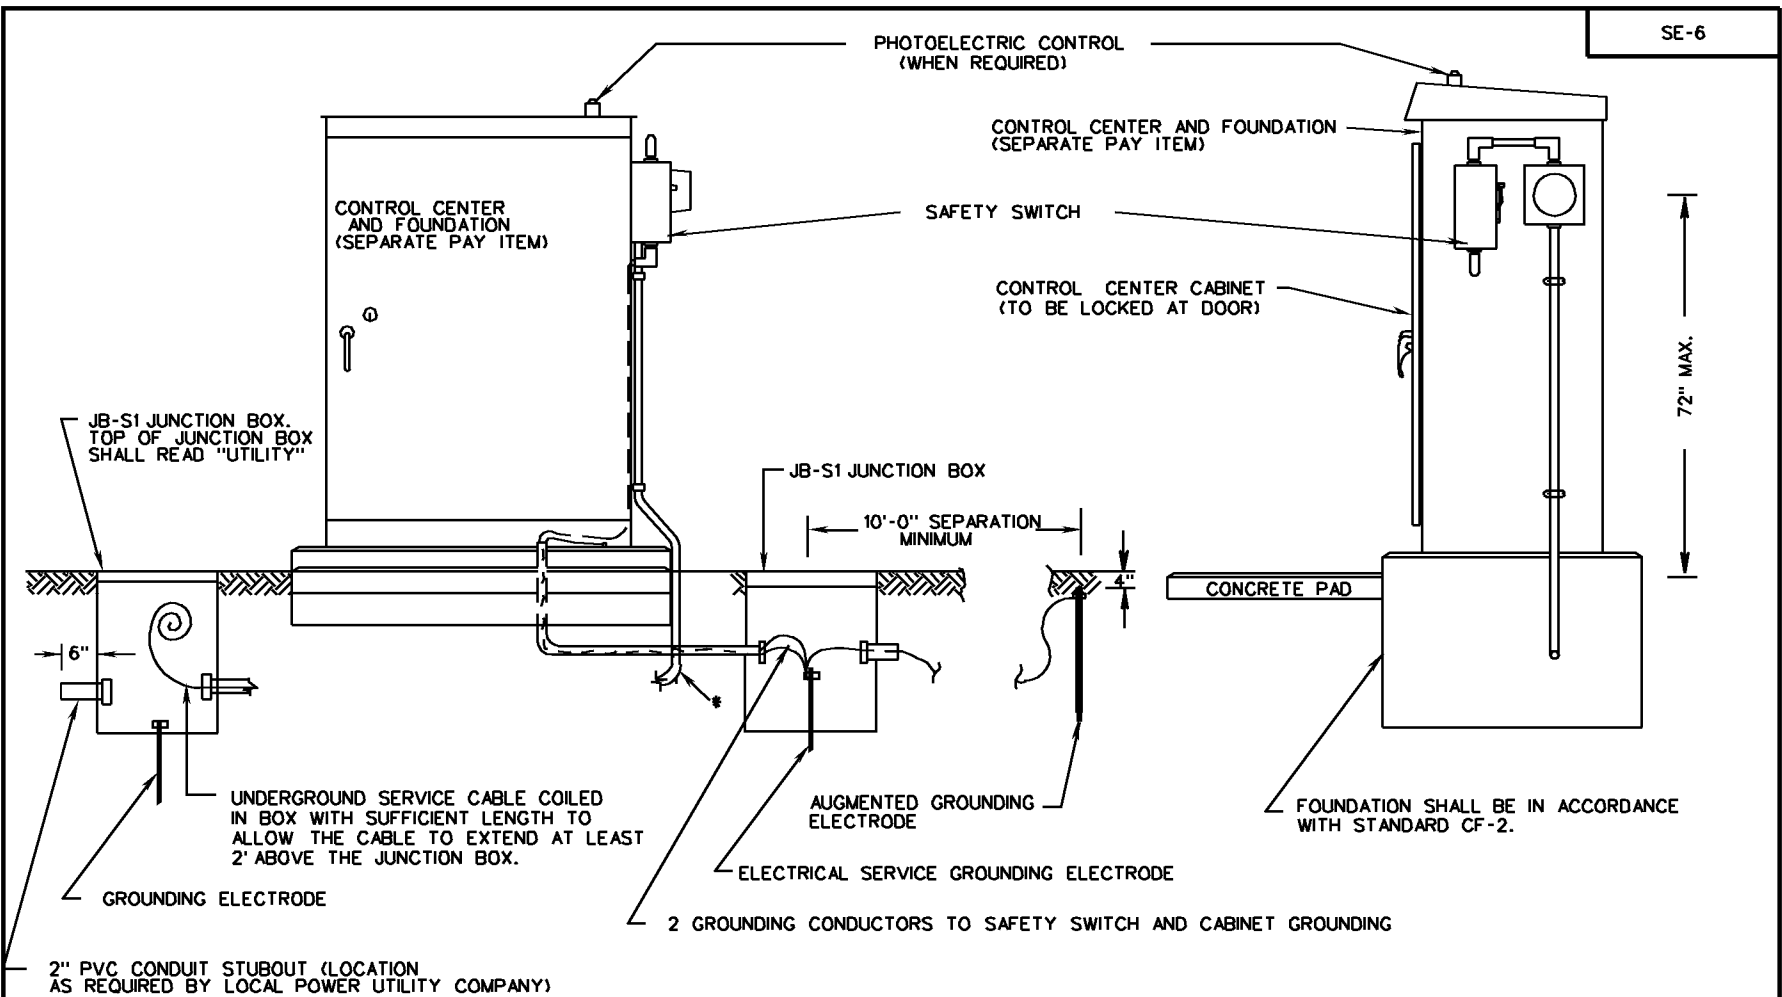

**NOTES:**

- \* THE CONDUIT AND SERVICE CABLE SHALL EXTEND FROM THE CABINET TO THE UTILITY JUNCTION BOX.
- THE CONTROL CENTER CABINET AT THE INSIDE AND OUTSIDE FOUNDATION JOINTS SHALL BE SEALED WITH A SILICONE SEALANT
- OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.
- GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.
- CONCRETE PAD SHALL BE INSTALLED IN FRONT OF CABINET DOORS, SIZED TO MATCH THE FOUNDATION WIDTH, AND SLOPED TO DRAIN (MIN. 20" W BY 36" L, 4" DEPTH)

- EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.
- WHEN 200 AMP OR GREATER SERVICE IS REQUIRED, SERVICE SHALL ENTER METER BASE ACCORDING TO UTILITY COMPANY STANDARD.
- NO OTHER CONDUCTORS SHALL BE RUN IN THE SAME CONDUIT WITH ELECTRICAL SERVICE CABLE.
- LOCAL POWER UTILITY COMPANY WILL INSTALL SERVICE POWER UTILITY CABLE FROM THEIR POWER SOURCE TO THE JUNCTION BOX AND MAKE REQUIRED SPLICES TO THE SERVICE CABLE COILED IN THE JUNCTION BOX.
- THIS STANDARD IS APPLICABLE FOR ALL ELECTRICAL SERVICES OTHER THAN 480Y/277.
- BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.

SPECIFICATION REFERENCE
700

**ELECTRICAL SERVICE  
INSTALLATION DETAILS**  
VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b> ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1312.60

**NOTES:**

THIS STANDARD IS APPLICABLE FOR ALL ELECTRICAL SERVICES OTHER THAN 480Y/277.

NO OTHER CONDUCTORS SHALL BE RUN IN THE SAME CONDUIT WITH ELECTRICAL SERVICE CABLE.

WHEN 200 AMP OR GREATER SERVICE IS REQUIRED, SERVICE SHALL ENTER METER BASE ACCORDING TO UTILITY COMPANY STANDARD.

LOCAL POWER UTILITY COMPANY WILL INSTALL SERVICE POWER UTILITY CABLE FROM THEIR POWER SOURCE TO THE JUNCTION BOX AND MAKE REQUIRED SPLICES TO THE SERVICE CABLE COILED IN THE JUNCTION BOX.

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.


GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.


BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.

POLE HEIGHT AND SIZE WILL BE AS SPECIFIED ON THE PLANS.

\* CONDUCTOR CABLES AND CONDUIT AS SPECIFIED ON PLANS.

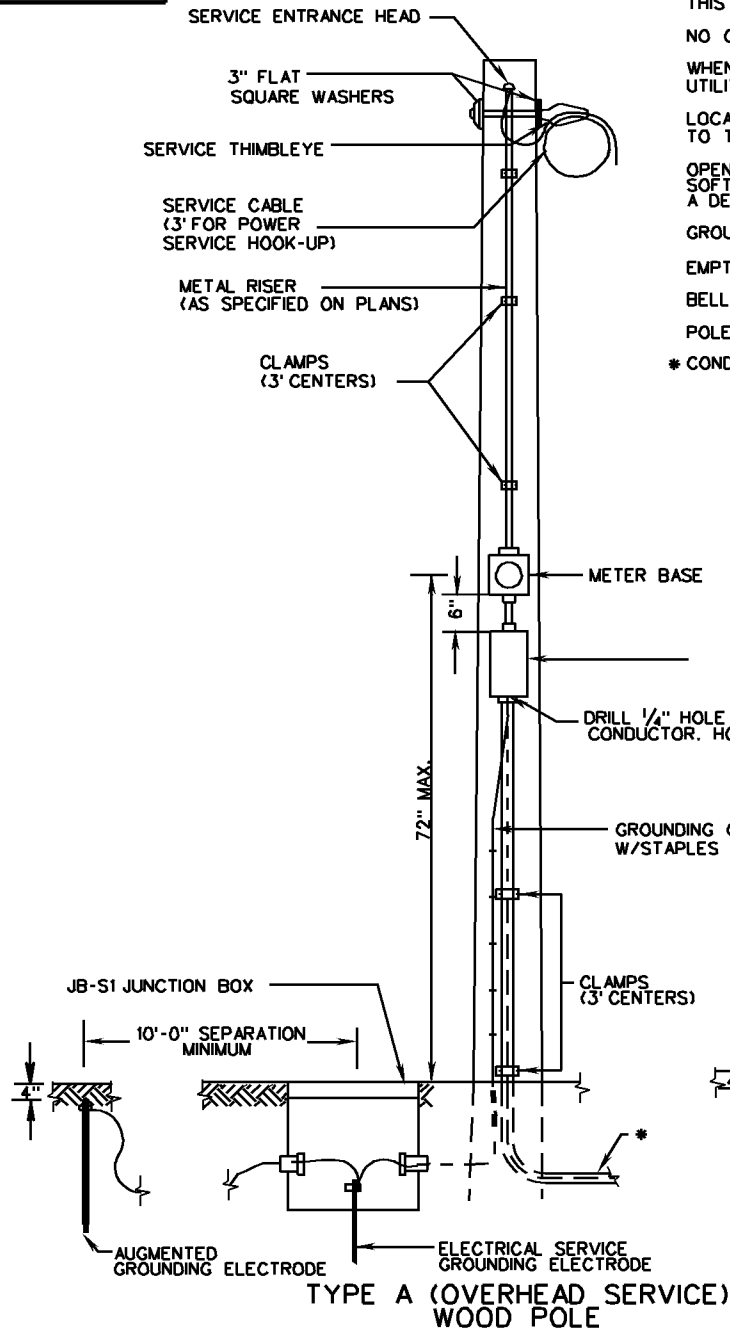

**TYPE A (OVERHEAD SERVICE)  
WOOD POLE**

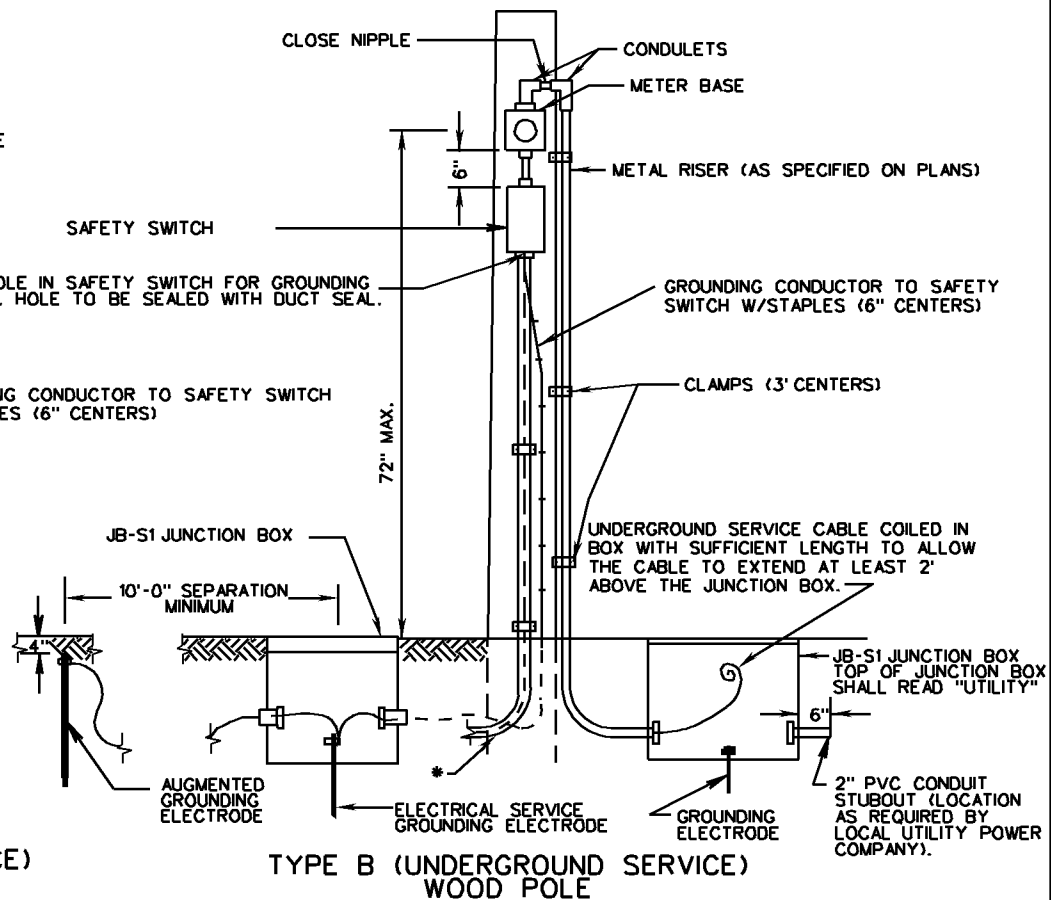


**TYPE B (UNDERGROUND SERVICE)  
WOOD POLE**


<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
SHEET 1 OF 1	REVISION DATE
1312.70	06-15-2009

**ELECTRICAL SERVICE  
INSTALLATION DETAILS**  
VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE
700

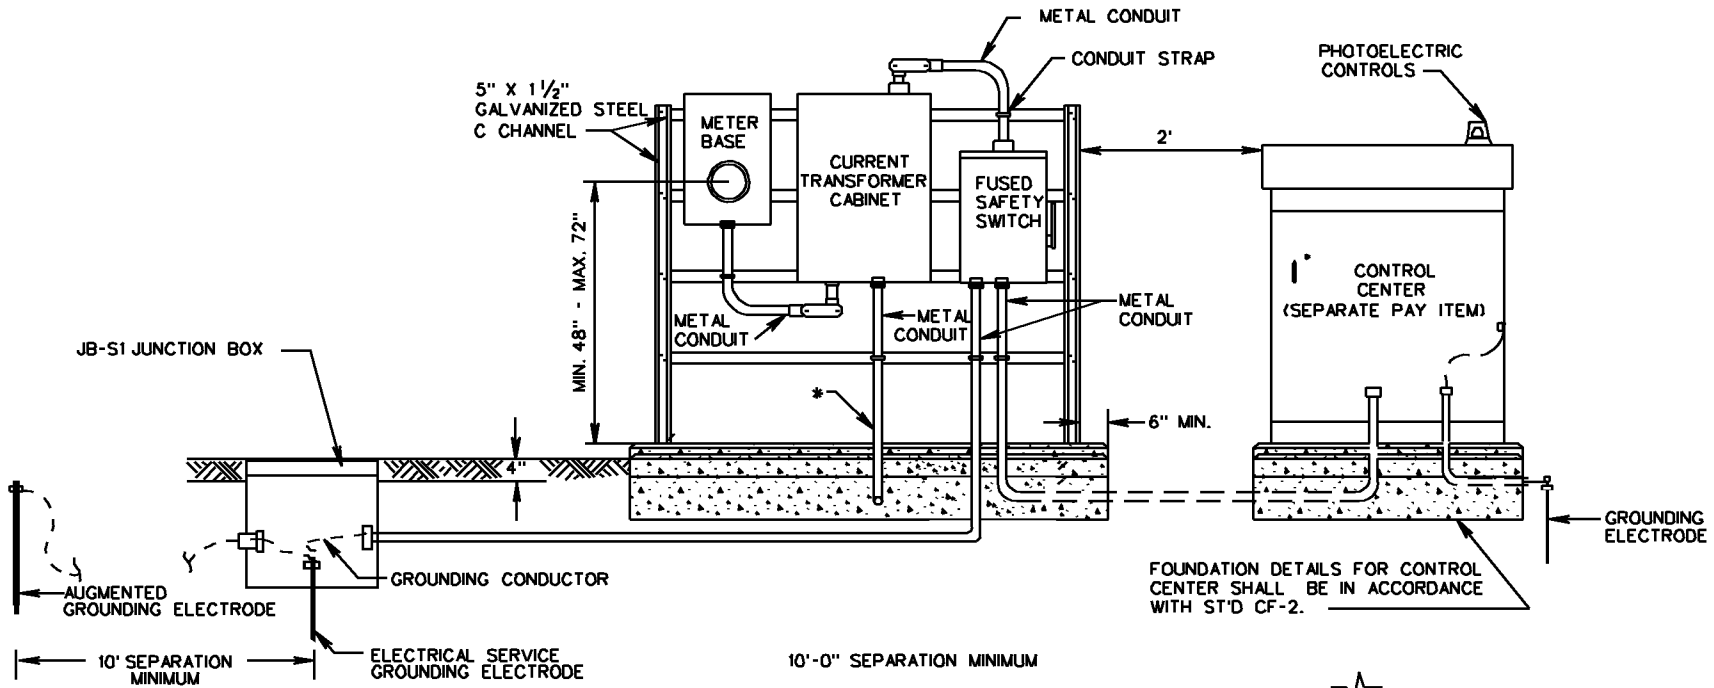

TYPE A

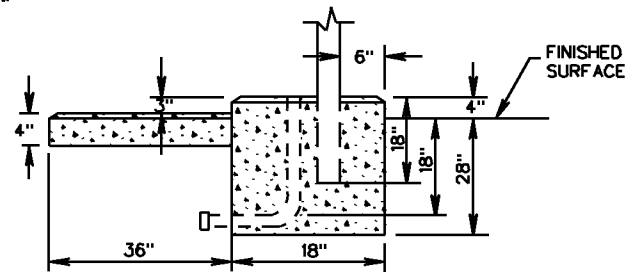

SERVICE ENTRANCE FOUNDATION DETAIL

**NOTES:**

THIS STANDARD IS APPLICABLE FOR 480Y/277 ELECTRICAL SERVICE ONLY.

NO OTHER CONDUCTORS SHALL BE RUN IN THE SAME CONDUIT WITH ELECTRICAL SERVICE CABLE.

ALL EXPOSED CONCRETE EDGES SHALL BE CHAMFERED 3/4".

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

BELL ENDS SHALL BE INSTALLED ON THE ENDS OF PVC CONDUITS.

LOCAL POWER COMPANY WILL INSTALL SERVICE CABLE FROM THEIR POWER SOURCE TO THE CURRENT TRANSFORMER CABINET AND METER BASE.

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

SAFETY SWITCH, METER BASE, WIREWAY, CURRENT TRANSFORMER CABINET AND CONTROL CENTER SHALL BE ATTACHED TO THE CHANNELING WITH 3/8" GALVANIZED BOLTS, LOCK WASHERS AND NUTS. FOUR CROSS CHANNELS SHALL BE UTILIZED.

EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUITS PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE 1/4" DEEP AND 4" TO 6" LONG.

THE CONTRACTOR SHALL LEAVE A SUFFICIENT AMOUNT OF CONDUCTOR CABLE COILED INSIDE THE CURRENT TRANSFORMER CABINET TO PERMIT THE LOCAL POWER COMPANY TO MAKE THEIR CONNECTION.

CONCRETE PAD SHALL BE INSTALLED IN FRONT OF CABINET DOORS, SIZED TO MATCH THE FOUNDATION WIDTH, AND SLOPED TO DRAIN (MIN. 20" X 36")

\* CONDUIT SHALL BE STUBBED OUT 6" PAST CONCRETE FOUNDATION PAD. LOCATION OF THE STUBBED CONDUIT SHALL BE AS REQUIRED BY THE LOCAL POWER COMPANY.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 2

REVISION DATE

1312.90


06-15-2009

**ELECTRICAL SERVICE  
INSTALLATION DETAILS**

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

700

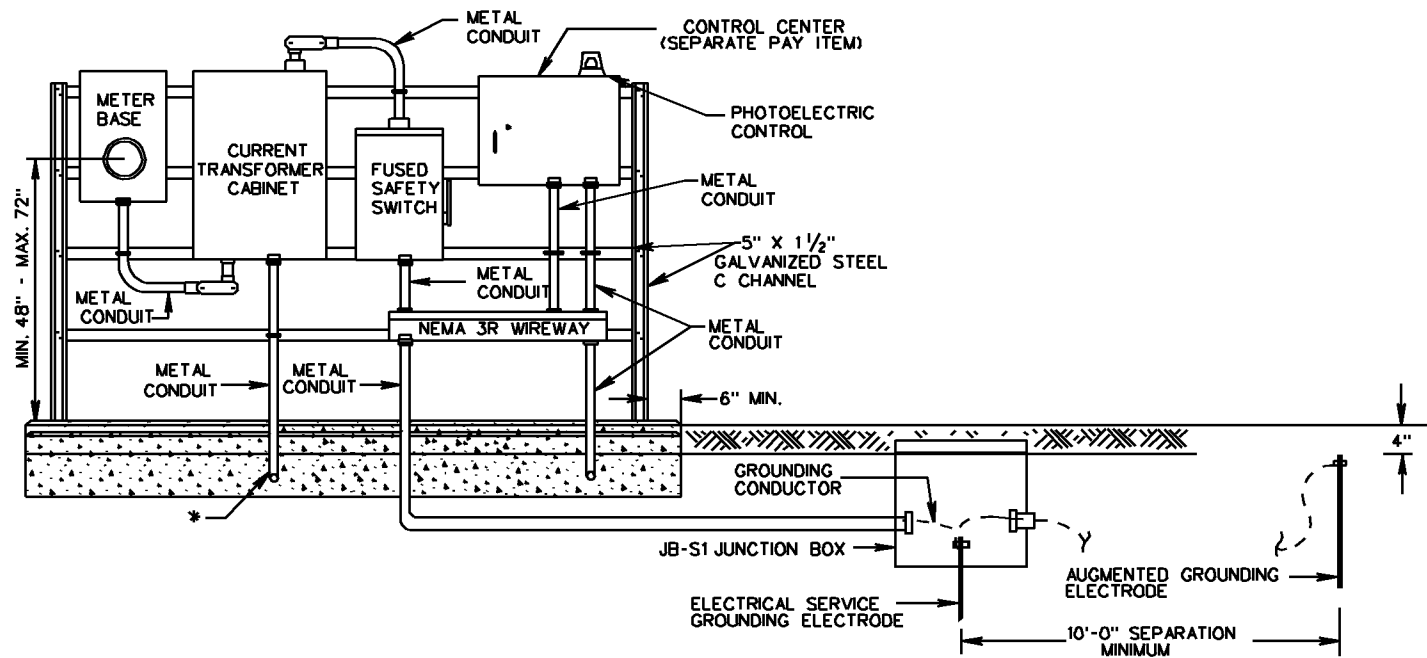

TYPE B

## NOTES:

THIS STANDARD IS APPLICABLE FOR 480Y/277 ELECTRICAL SERVICE ONLY.

NO OTHER CONDUCTORS SHALL BE RUN IN THE SAME CONDUIT WITH ELECTRICAL SERVICE CABLE.

ALL EXPOSED CONCRETE EDGES SHALL BE CHAMFERED  $\frac{3}{4}$ ".

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

BELL ENDS SHALL BE INSTALLED ON THE ENDS OF PVC CONDUITS.

LOCAL POWER COMPANY WILL INSTALL SERVICE CABLE FROM THEIR POWER SOURCE TO THE CURRENT TRANSFORMER CABINET AND METER BASE.

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

SAFETY SWITCH, METER BASE, WIREWAY, CURRENT TRANSFORMER CABINET AND CONTROL CENTER SHALL BE ATTACHED TO THE CHANNELING WITH  $\frac{3}{4}$ " GALVANIZED BOLTS, LOCK WASHERS AND NUTS. FOUR CROSS CHANNELS SHALL BE UTILIZED.

EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUITS PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE  $\frac{1}{4}$ " DEEP AND 4" TO 6" LONG.

THE CONTRACTOR SHALL LEAVE A SUFFICIENT AMOUNT OF CONDUCTOR CABLE COILED INSIDE THE CURRENT TRANSFORMER CABINET TO PERMIT THE LOCAL POWER COMPANY TO MAKE THEIR CONNECTION.

CONCRETE PAD SHALL BE INSTALLED IN FRONT OF CABINET DOORS, SIZED TO MATCH THE FOUNDATION WIDTH, AND SLOPED TO DRAIN (MIN. 20" X36")

\* CONDUIT SHALL BE STUBBED OUT 6" PAST CONCRETE FOUNDATION PAD. LOCATION OF THE STUBBED CONDUIT SHALL BE AS REQUIRED BY THE LOCAL POWER COMPANY.

SPECIFICATION  
REFERENCE

700

## ELECTRICAL SERVICE INSTALLATION DETAILS

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

06-15-2009

SHEET 2 OF 2

1312.91

OPEN ENDS OF CONDUITS WITH CONDUCTORS INSTALLED SHALL BE SEALED WITH AN APPROVED SOFT, PLIABLE, AND EASILY REMOVABLE WATERPROOF SEALANT. THE SEALANT SHALL NOT HAVE A DELETERIOUS EFFECT ON CABLE COVERINGS.

\* THE CONDUIT AND CONDUCTOR CABLE SHALL BE AS SPECIFIED ON THE PLANS.

THIS STANDARD IS APPLICABLE FOR ALL ELECTRICAL SERVICES OTHER THAN 480Y/277.

NO OTHER CONDUCTORS SHALL BE RUN IN THE SAME CONDUIT WITH ELECTRICAL SERVICE CABLE.

WHEN 200 AMP OR GREATER SERVICE IS REQUIRED, SERVICE SHALL ENTER METER BASE ACCORDING TO UTILITY COMPANY STANDARD.



LOCAL POWER UTILITY COMPANY WILL INSTALL SERVICE POWER UTILITY CABLE FROM THEIR POWER SOURCE TO THE JUNCTION BOX AND MAKE REQUIRED SPLICES TO THE SERVICE CABLE COILED IN THE JUNCTION BOX.

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

POLE HEIGHT AND SIZE WILL BE AS SPECIFIED IN THE PLANS.


BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.

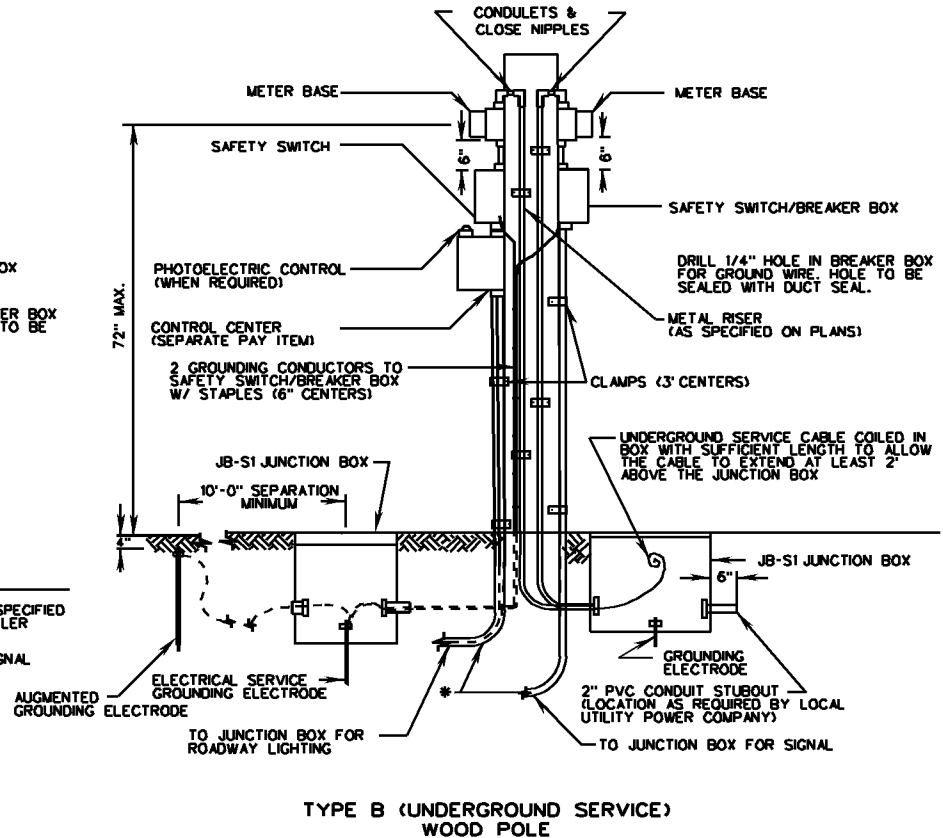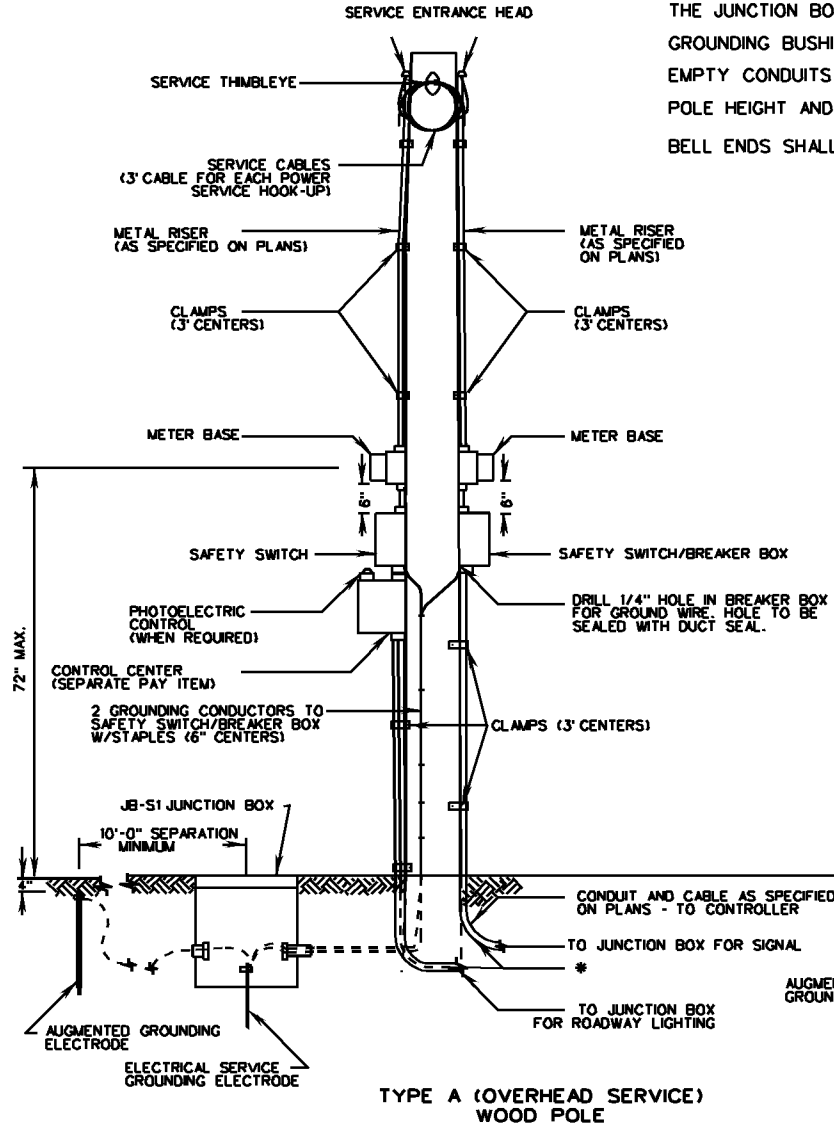

SPECIFICATION REFERENCE
700

**ELECTRICAL SERVICE  
INSTALLATION DETAILS**  
VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b> ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
06-15-2009	1313.10

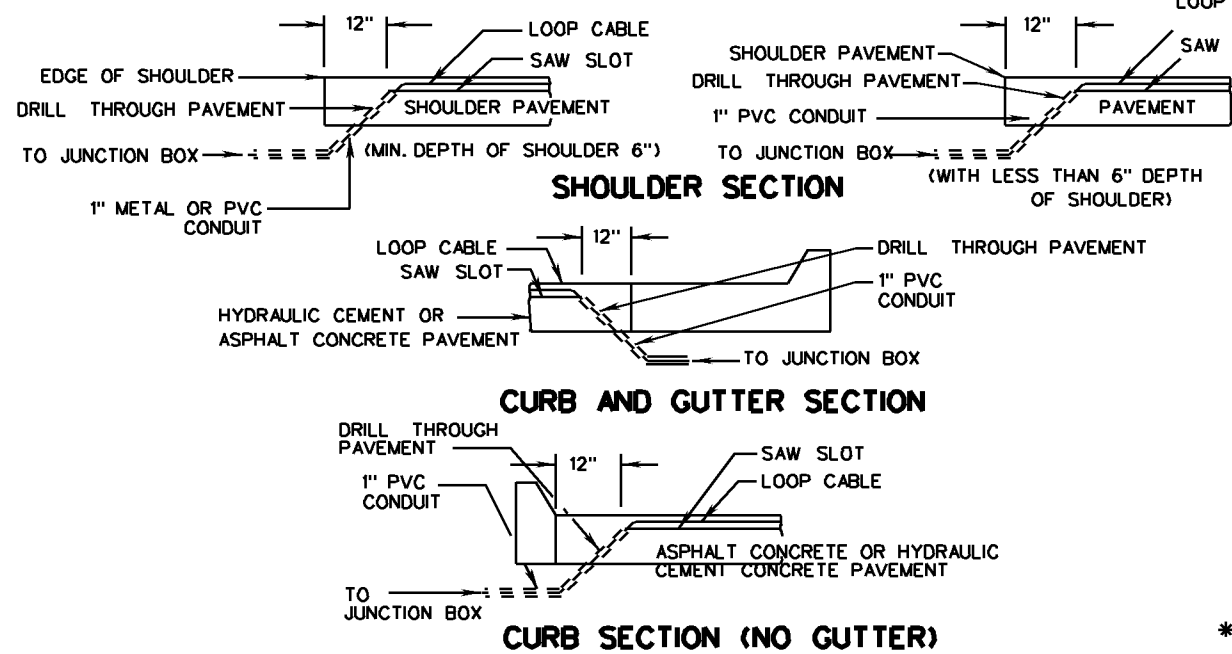

**NOTES:**

THE TOP OF THE 1" PVC CONDUITS SHALL BE INSTALLED 1" BELOW THE BOTTOM OF THE SAW CUTS.

PLASTIC BUSHINGS SHALL BE INSTALLED ON THE ENDS OF THE CONDUITS IN THE PAVEMENT. DUCT SEAL SHALL BE APPLIED TO THE OPEN END OF THE BUSHING.

SAW SLOTS SHALL INTERSECT WITH THE HOLES DRILLED FOR INSTALLATION OF THE CONDUITS AND LOOP CABLES.

DRILLED HOLES SHALL BE NO LARGER THAN REQUIRED FOR INSTALLATION OF THE CONDUIT AND PLASTIC BUSHING.




REMOVAL OF LARGE SECTIONS OF PAVEMENT TO PERFORM THIS WORK WILL NOT BE ALLOWED.

ONE PVC CONDUIT SHALL BE PROVIDED FOR EACH SAW SLOTS.

ANGLE OF DRILL FOR INSTALLATION OF CONDUIT AND LOOP CABLE SHALL BE APPROXIMATELY 45°.

ALL DIMENSIONS NOT SHOWN SHALL BE AS SPECIFIED ON THE PLANS.


\* TWISTED TOGETHER WITH A MINIMUM OF TWO TURNS PER RUNNING FOOT.

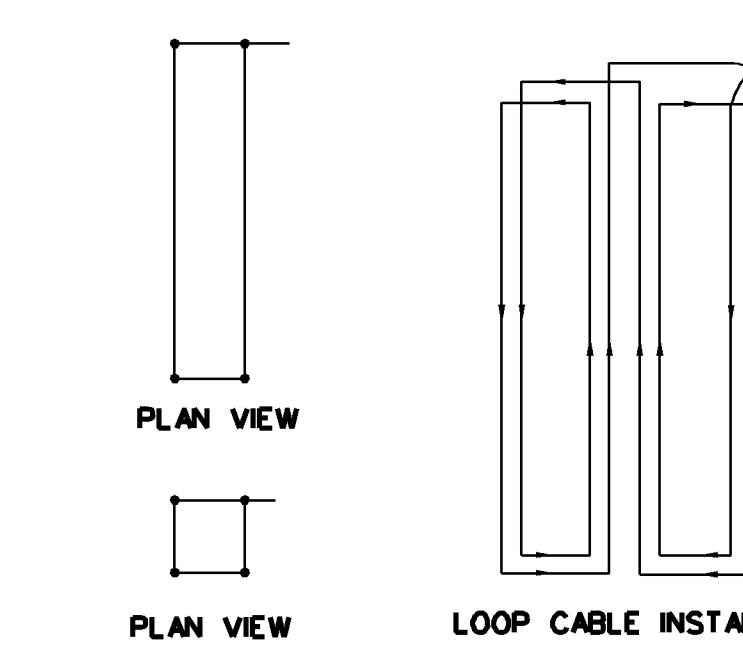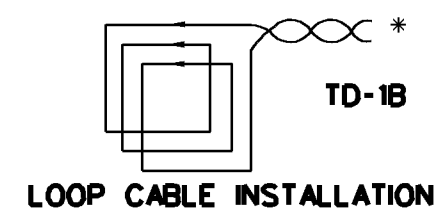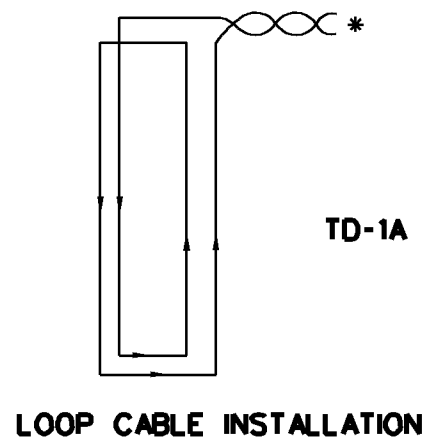


SPECIFICATION REFERENCE
703

**LOOP DETECTOR  
 INSTALLATION DETAIL**  
 VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE 6-15-09	SHEET 2 OF 2
1315.11	

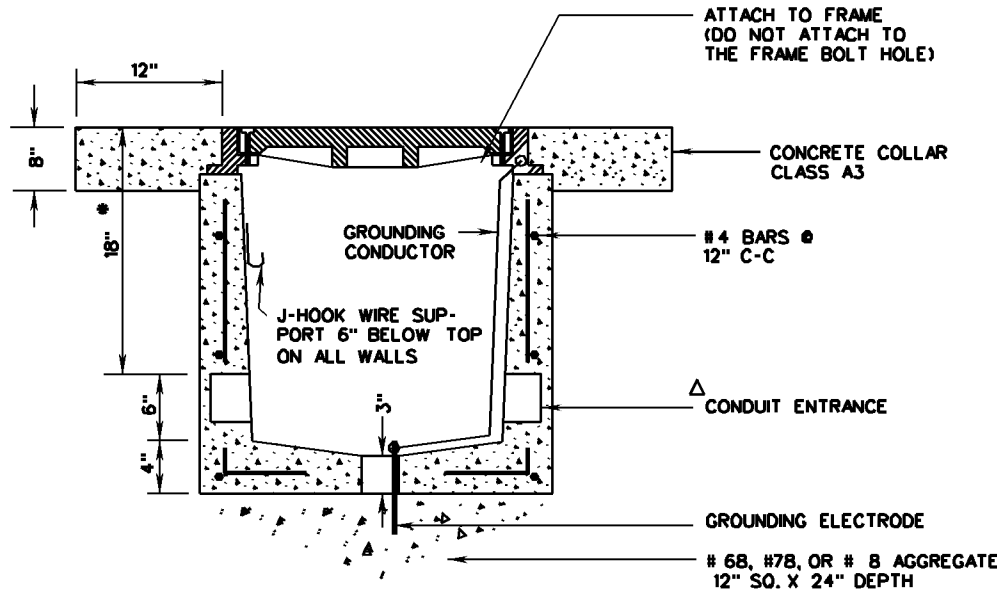

STANDARD	DIMENSIONS	
	E	F
JB-R1	20"	20"
JB-R2	27"	27"

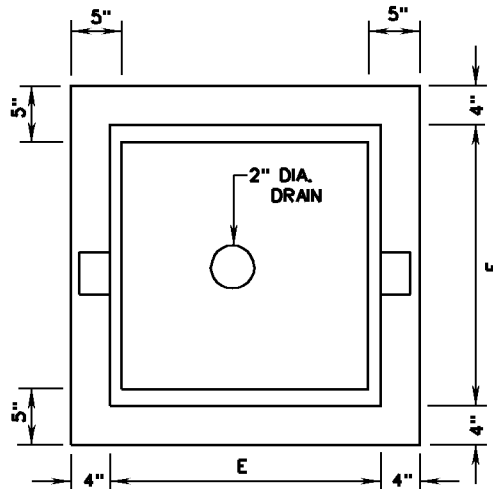

**PLAN VIEW**  
**(FRAME AND COVER REMOVED)**

**NOTES:**

J-HOOK WIRE SUPPORTS SHALL BE SECURELY ATTACHED TO THE JUNCTION BOX WITH A BOLT AND NUT WITH A NEOPRENE WASHER OR AN EXPANSION FITTING.

CONDUIT ENTRANCES SHALL BE LOCATED AS SHOWN ON THE PLANS. CONDUITS SHALL EXTEND 2" MIN. TO 3" MAX. INTO THE INSIDE WALL OF THE JUNCTION BOX.

BELL ENDS SHALL BE INSTALLED ON THE ENDS OF PVC CONDUITS. GROUNDING BUSHINGS SHALL BE INSTALLED ON THE ENDS OF METAL CONDUITS.

CONDUITS AND BUSHINGS SHALL BE PLUGGED TO PREVENT MOISTURE & RODENT ENTRY.

\* DEPTH OF CONDUIT ENTRANCES FOR MAGNETIC DETECTORS SHALL BE IN ACCORDANCE WITH THE PLANS.

ALL REINFORCING STEEL SHALL HAVE A MINIMUM 1/2" CONCRETE COVER. ANY REINFORCING STEEL IN CONFLICT WITH CONDUIT SHALL BE CUT A MINIMUM OF 1/2" FROM CONDUIT.

THE JUNCTION BOX MAY BE PRECAST OR CAST IN PLACE CONCRETE.

△ A MINIMUM 2" DIAMETER CONDUIT ENTRANCE IS REQUIRED UNLESS OTHERWISE SPECIFIED ON PLANS.

A CONCRETE COLLAR IS REQUIRED ONLY WHEN JUNCTION BOX IS INSTALLED IN EARTH AREAS.

HIGH STRENGTH GROUT CONFORMING TO THE ROAD & BRIDGE SPECIFICATIONS SHALL BE USED TO SECURE THE FRAME TO THE JUNCTION BOX.

ALL JUNCTION BOXES SHALL BE INSTALLED WITH A GROUNDING ELECTRODE

VOIDS RESULTING FROM ENTRANCE OF CONDUITS INTO JUNCTION BOX SHALL BE COMPLETELY FILLED WITH HYDRAULIC CEMENT GROUT CONFORMING TO THE ROAD & BRIDGE SPECIFICATIONS.


SPECIFICATION REFERENCE
700

**JUNCTION BOX**  
**FOR TRAFFIC USE**

VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b> ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 2
06-15-2009	1317.10



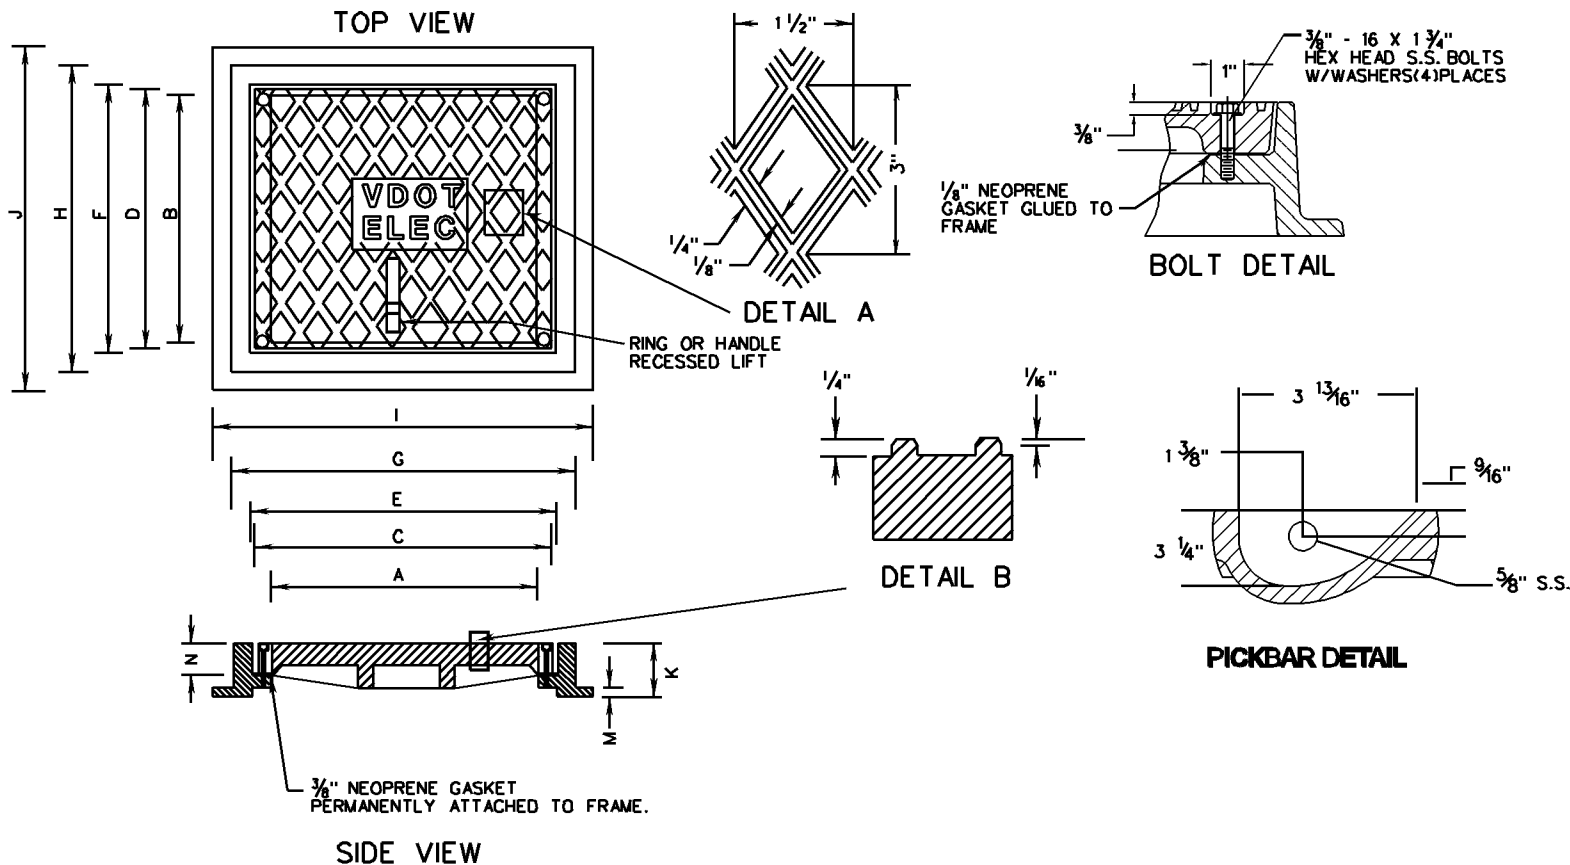


STANDARD	DIMENSIONS												
	A	B	C	D	E	F	G	H	I	J	K	M	N
JB-R1	18"	18"	19"	19"	20"	20"	21"	21"	24"	24"	4"	5/8"	1"
JB-R2	24"	24"	26"	26"	27"	27"	28"	28"	33"	33"	4"	5/8"	1"

**NOTES:**


THE COVER SHALL HAVE A NON-SKID SURFACE WITH LETTERS CAST IN THE DEPRESSION ON TOP. THE LETTERS "VDOT ELEC", "VDOT TRAFF", "VDOT COMM" OR "UTILITY" AS APPLICABLE ARE TO BE ONE (1) INCH WIDE AND RAISED 1/4" HIGH. COVERS USED FOR JUNCTION BOXES INSTALLED WITHIN MUNICIPALITIES AND NOT MAINTAINED BY VDOT SHALL NOT REQUIRE THE VDOT REFERENCE.

FOUR RECESSED 3/8" HEX BOLTS ARE REQUIRED FOR EACH COVER.

CASTINGS SHALL MEET ALL REQUIREMENTS OF AASHTO M306 AND AASHTO M105

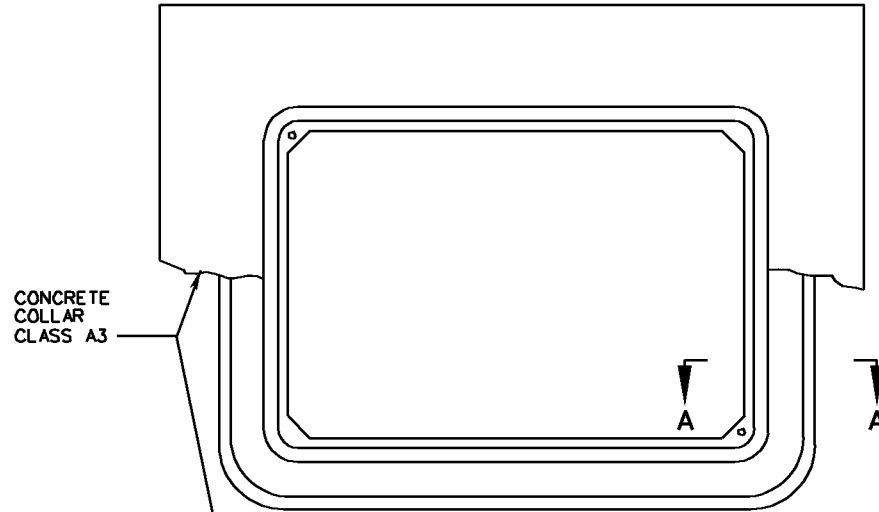


TOP VIEW

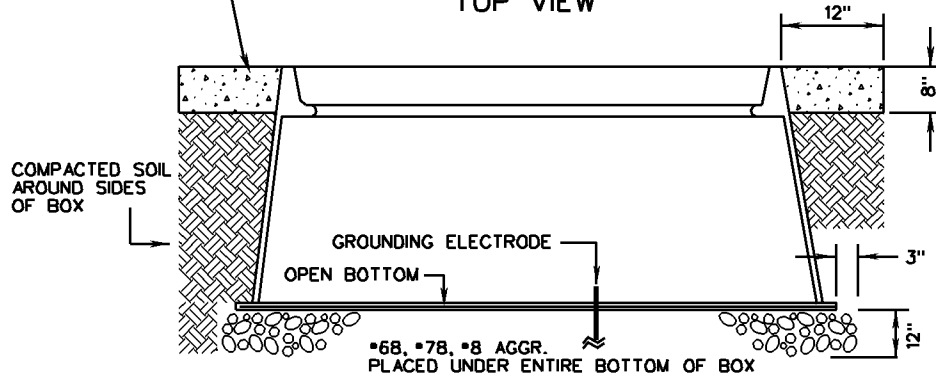


SECTION VIEW

NOTES:

- JUNCTION BOXES MAY BE STRAIGHT OR FLARED WALL IN DESIGN. MATERIALS SHALL CONFORM TO SECTION 238 OF THE ROAD & BRIDGE SPECIFICATIONS.
- BELL ENDS SHALL BE INSTALLED ON THE ENDS OF PVC CONDUITS.
- GROUNDING BUSHINGS SHALL BE INSTALLED ON THE ENDS OF METAL CONDUITS.
- BELL ENDS AND BUSHINGS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.
- \*DEPTH OF CONDUIT ENTRANCE FOR USE OF MAGNETIC DETECTORS SHALL BE IN ACCORDANCE WITH STANDARD TD-2.
- CONDUIT ENTRANCES SHALL BE LOCATED AS SHOWN ON THE PLANS.
- THE COVER SHALL HAVE A NON-SKID SURFACE WITH LETTERS CAST IN THE DEPRESSION ON TOP. THE LETTERS "VDOT ELEC", "VDOT TRAF", "VDOT COMM" OR UTILITY AS APPLICABLE ARE TO BE 1" WIDE. COVERS USED FOR JUNCTION BOXES INSTALLED WITHIN MUNICIPALITIES AND NOT MAINTAINED BY VDOT SHALL NOT REQUIRE THE VDOT REFERENCE.
- ALL JUNCTION BOXES SHALL BE INSTALLED WITH A GROUNDING ELECTRODE

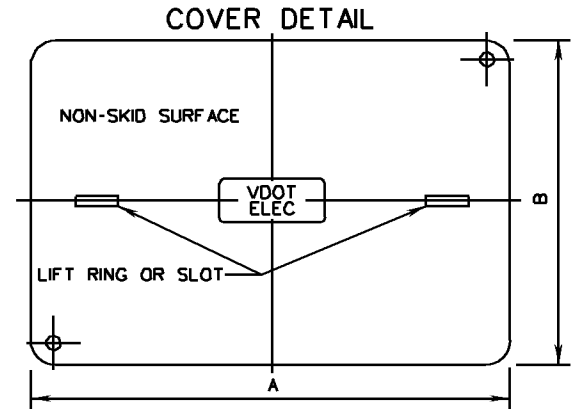

SECTION A-A

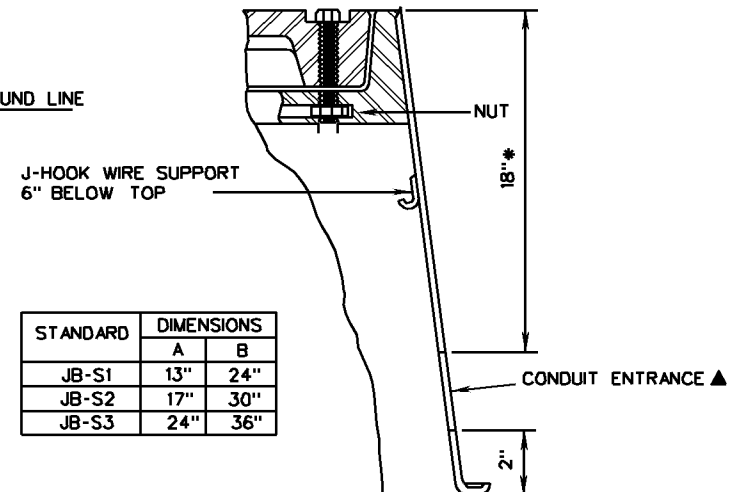

STANDARD	DIMENSIONS	
	A	B
JB-S1	13"	24"
JB-S2	17"	30"
JB-S3	24"	36"


- TWO RECESSED 3/8" S.S. HEX HEAD BOLTS ARE REQUIRED FOR EACH COVER.
- ▲ A MINIMUM 2" DIAMETER CONDUIT ENTRANCE IS REQUIRED, UNLESS OTHERWISE SPECIFIED ON THE PLANS.
- J-HOOK WIRE SUPPORTS SHALL BE SECURELY ATTACHED TO THE JUNCTION BOX WITH A BOLT AND NUT WITH A NEOPRENE WASHER OR AN EXPANSION FITTING.
- CONDUITS SHALL EXTEND 2" TO 3" MAX. INTO THE INSIDE WALL OF THE JUNCTION BOX.
- THE JUNCTION BOX MAY BE A TWO PIECE DESIGN WITH THE TOP SECTION NO LESS THAN 17" IN DEPTH.
- VOIDS RESULTING FROM ENTRANCE OF CONDUITS INTO JUNCTION BOXES SHALL BE COMPLETELY FILLED WITH AN APPROVED MATERIAL.

SPECIFICATION REFERENCE
700 238

**JUNCTION BOX**  
FOR NON-DELIBERATE TRAFFIC USE  
VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b>	
ROAD AND BRIDGE STANDARDS	
REVISION DATE 6-15-09	SHEET 1 OF 1
1317.20	

ECI-1

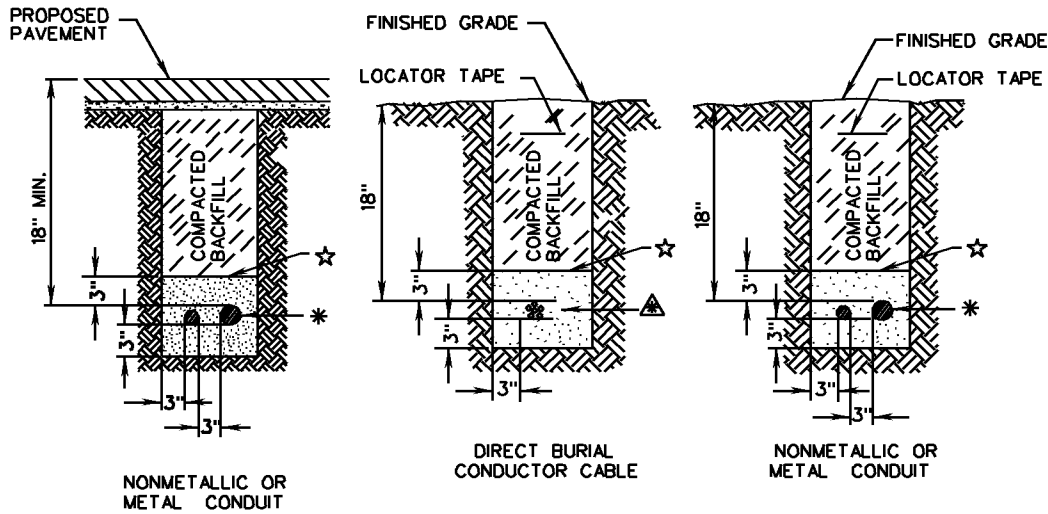

NON - PAVEMENT AND PROPOSED PAVEMENT AREA INSTALLATION

**NOTES:**

CONTRACTOR SHALL INSTALL A 4" MINIMUM TO 6" MAXIMUM WIDE RED PLASTIC LOCATOR TAPE 6" TO 8" BELOW FINISHED GRADE AND DIRECTLY ABOVE BURIED CONDUIT OR CONDUCTOR CABLES, EXCEPT UNDER PAVEMENT.

CONDUIT INSTALLED UNDER EXISTING OR PROPOSED ROADWAYS FOR DIRECT BURIED CABLES SHALL EXTEND 24" BEYOND THE PAVED SURFACE AND/OR SIDEWALK.

WHERE CONDUIT FOR POWER AND CONDUIT FOR COMMUNICATION ARE TO BE INSTALLED IN CLOSE PROXIMITY TO EACH OTHER, CONDUITS SHALL BE PLACED PARALLEL IN A COMMON TRENCH WITH NO LESS THAN 6" OF SEPARATION BETWEEN CONDUIT SYSTEMS.

☆ BACKFILL MATERIAL BELOW THIS LEVEL SHALL BE SANDY FILL (FREE OF ANY STONES, CINDERS, WOOD, ROOTS, DEBRIS, ETC.)


\* ONE OR MORE CONDUITS AS REQUIRED.

▲ ONE OR MORE CONDUCTOR CABLES AS REQUIRED.


OFFSETTING OF CONDUIT MAY BE USED FOR TIEING INTO EXISTING CONDUIT SYSTEMS OR BYPASSING OBSTRUCTIONS AS DIRECTED BY THE ENGINEER.

WHEN OFFSETTING CONDUIT TO BYPASS AN OBSTRUCTION, THE CONDUIT SHALL MAINTAIN A MINIMUM CLEARANCE OF 12" FROM THE CLOSEST POINT OF THE OBSTRUCTION.

ECI-2

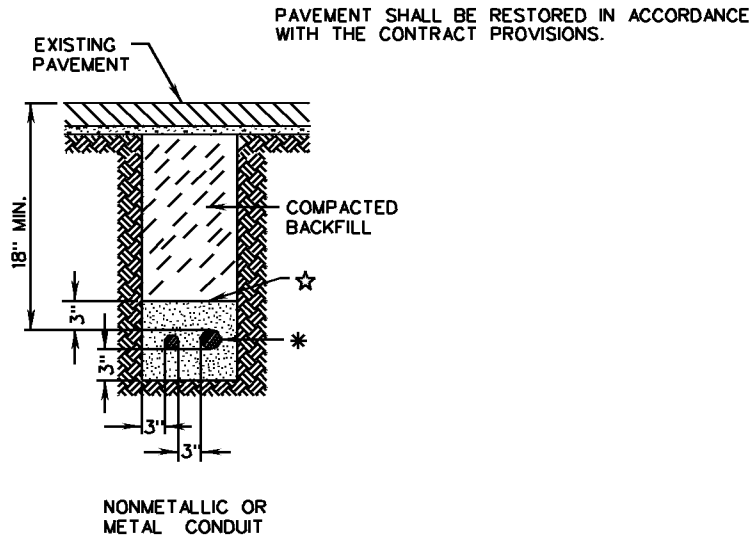

EXISTING PAVEMENT AREA INSTALLATION

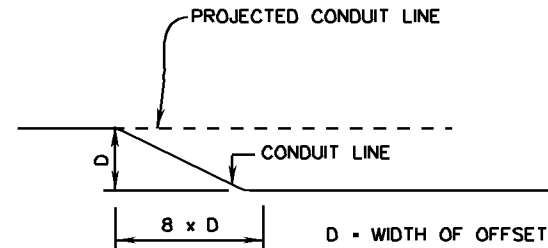

METHOD OF OFFSETTING CONDUIT



ROAD AND BRIDGE STANDARDS

**ELECTRICAL CONDUIT AND CONDUCTOR CABLE**

SPECIFICATION REFERENCE

SHEET 1 OF 1

REVISION DATE

**UNDERGROUND INSTALLATION**


700

1318.10

06-15-2009


VIRGINIA DEPARTMENT OF TRANSPORTATION

ASSEMBLY TO BE  
ERECTED 5' FROM  
THE NOSE OF MEDIAN  
AND CENTERED  
IN MEDIAN.

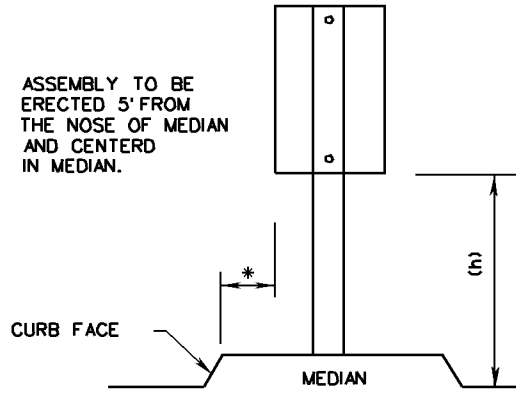


\* 2' MINIMUM FOR MEDIANS OVER 10' IN WIDTH. 12" FOR MEDIANS 10' OR LESS IN WIDTH UNLESS SHOWN OTHERWISE ON THE PLANS.

SINGLE POST  
MEDIAN INSTALLATIONS

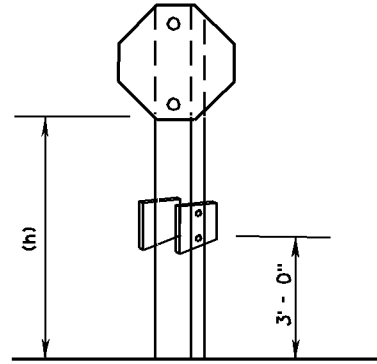


ONE WAY SIGNS  
ON EXIT RAMPS  
WITH STOP SIGN

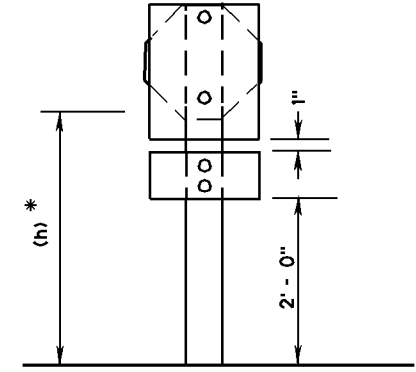


\* TO BOTTOM OF STOP SIGN  
OR YIELD SIGN

STOP OR YIELD SIGNS AND  
DO NOT ENTER SIGN  
AT EXIT RAMPS

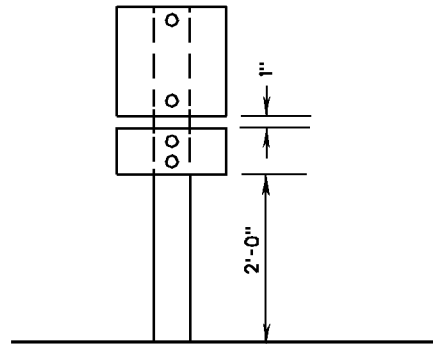

WRONG WAY SIGN  
AND DO NOT ENTER SIGN  
ON EXIT RAMPS

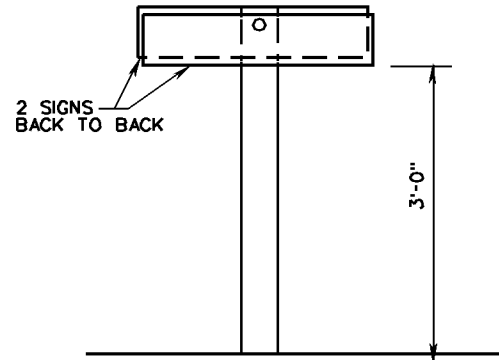

ONE WAY SIGNS  
ON EXIT RAMPS

SPECIFICATION  
REFERENCE

700

# SQUARE TUBE SIGN POST

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT


ROAD AND BRIDGE STANDARDS

REVISION DATE  
6-15-09


SHEET 3 OF 3

1321.12


SSP-VA

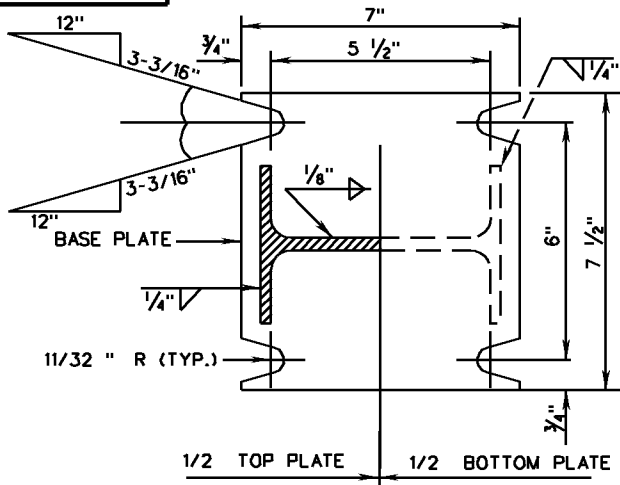

SECTION A-A  
FOR W6 x 12 POST

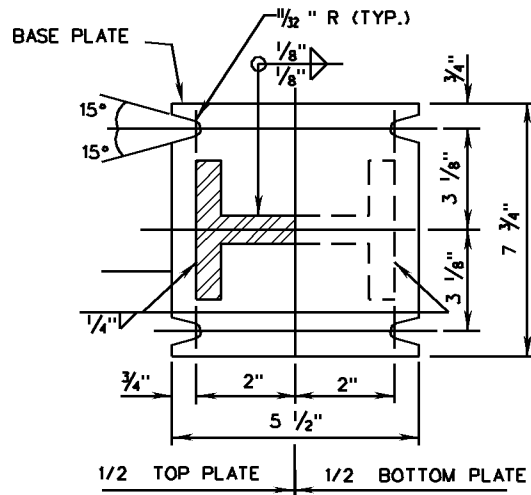


SECTION A-A  
FOR W4 x 13 POST

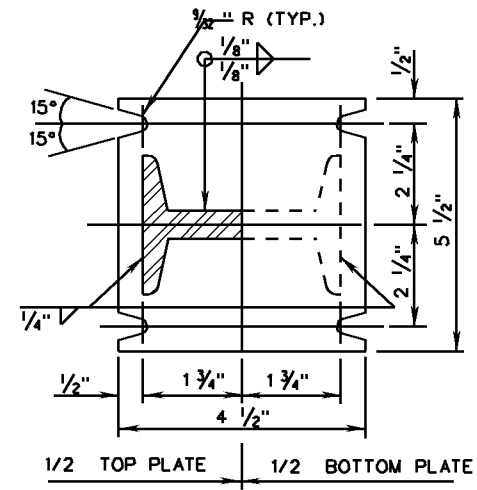


SECTION A-A  
FOR S3 x 5.7 POST

STANDARD INSTALLATION

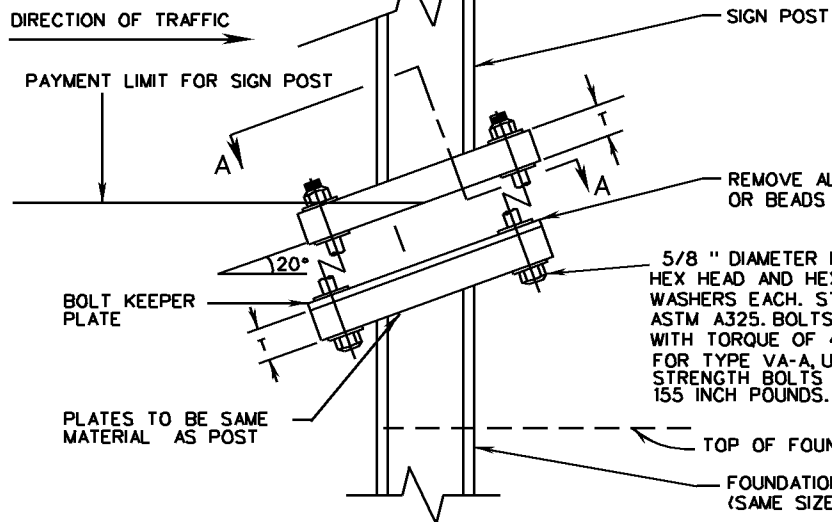

MEDIAN ONLY INSTALLATION

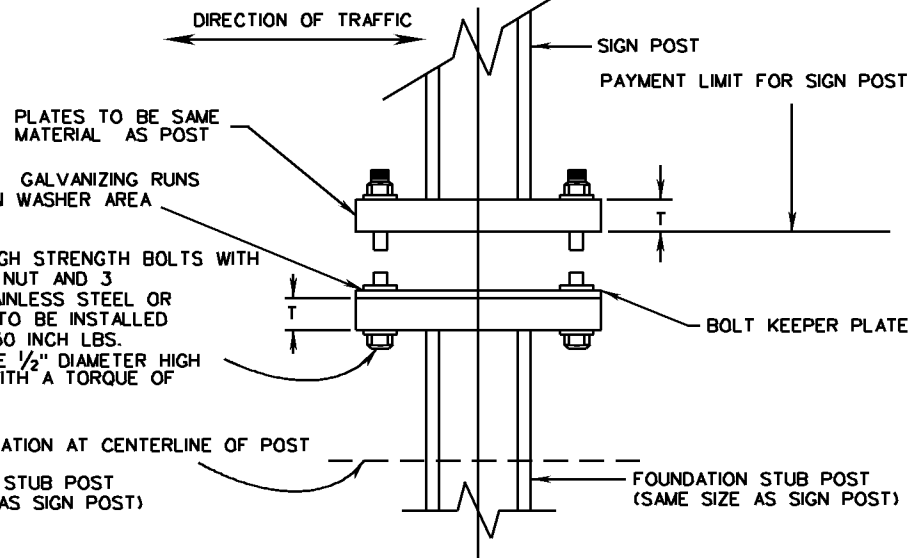

ROAD AND BRIDGE STANDARDS

SHEET 3 OF 4 REVISION DATE 6-15-09

1322.12


VA SIGN STRUCTURE  
INSTALLATION DETAILS

VIRGINIA DEPARTMENT OF TRANSPORTATION


SPECIFICATION  
REFERENCE

700

TYPICAL SIGN FOOTING DETAIL WITH CONDUIT

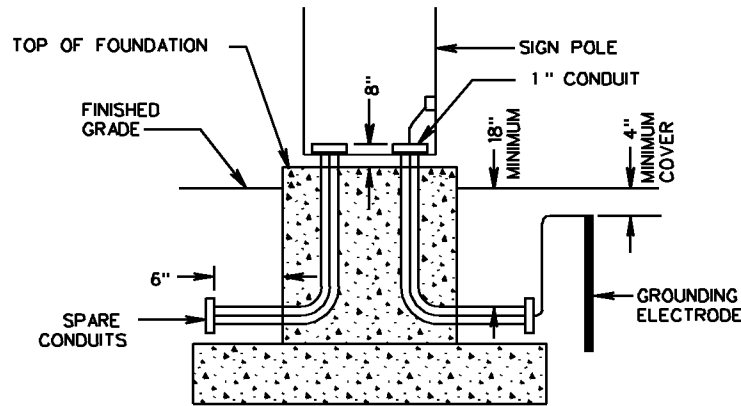

LOCATION OF FUTURE USE CONDUITS FOR DOUBLE END POLE STRUCTURES

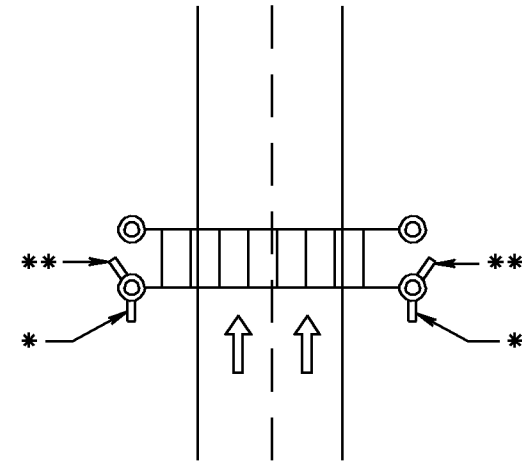

\* FUTURE USE CONDUITS PLACED PARALLEL TO THE ROADWAY

\*\* FUTURE USE CONDUITS PLACED AT AN ANGLE TO MISS THE BACK FOUNDATION OR ANCHOR BOLTS IN A SPREAD FOOTING FOUNDATION.

**NOTES:**

THE TYPE, SIZE, NUMBER AND ORIENTATION OF CONDUITS ENTERING AND EXITING FOOTINGS MAY VARY PER SIGN LOCATION.

IN ADDITION TO THE CONDUITS SPECIFIED ON THE PLANS, ONE - 1" CONDUIT REQUIRED FOR GROUND WIRE AND TWO - 2" PVC HEAVY WALL CONDUITS REQUIRED FOR FUTURE USE. FUTURE USE CONDUITS SHALL BE STUBBED OUT AND CAPPED. FUTURE USE CONDUITS SHALL BE ORIENTED TO RUN PARALLEL TO THE ROADWAY. FOR LOCATION OF FUTURE USE CONDUITS IN FOUNDATIONS FOR DOUBLE END POLE STRUCTURES, SEE DRAWING AT RIGHT.

EACH FOUNDATION SHALL BE PERMANENTLY MARKED TO INDICATE ALL SIDES FROM WHICH CONDUITS PASS. THIS MARK SHALL BE MADE WITH A TROWEL WHEN FINISHING THE CONCRETE AND SHALL BE 1/4" DEEP AND 4" TO 6" LONG. LOCATIONS OF EMPTY CONDUITS SHALL HAVE AN ADDITIONAL 2" LONG MARK MADE PERPENDICULAR TO AND CENTERED ON THIS MARK.

FOUNDATIONS ABOVE FINISHED GRADE SHALL BE CHAMFERED 3/4" ON ALL EDGES.

GROUNDING BUSHINGS SHALL BE INSTALLED ON EACH END OF METAL CONDUITS.

BELL ENDS SHALL BE INSTALLED ON EACH END OF PVC CONDUITS.

BELL ENDS & BUSHINGS OF EMPTY CONDUITS SHALL BE PLUGGED TO PREVENT MOISTURE AND RODENT ENTRY.

VOIDS REMAINING AFTER CONDUCTORS EXIT OR ENTER BELL ENDS OR BUSHINGS OF CONDUITS SHALL BE SEALED WITH SILICONE TO PREVENT MOISTURE AND RODENT ENTRY.

NO MORTAR, GROUT, OR CONCRETE SHALL BE PLACED BETWEEN BOTTOM OF BASE PLATE AND TOP OF FOUNDATION.


THE MAXIMUM SPACE BETWEEN THE BOTTOM OF THE BASE PLATE AND THE TOP OF THE FOUNDATION SHALL BE NO GREATER THAN THE DIAMETER OF THE ANCHOR BOLT PLUS ONE INCH.

OVERHEAD SIGN STRUCTURES INCLUDING "BUTTERFLY" STRUCTURES SHALL HAVE A MINIMUM OF SIX ANCHOR BOLTS, EACH HAVING A MINIMUM DIAMETER OF 1 1/2".

<p>SPECIFICATION REFERENCE</p>	<p><b>OVERHEAD SIGN STRUCTURE</b>  <b>FOUNDATION DETAILS</b>                  VIRGINIA DEPARTMENT OF TRANSPORTATION</p>	<p><b>VDOT</b>                  ROAD AND BRIDGE STANDARDS</p>
<p>700</p>		<p>REVISION DATE      SHEET 4 OF 7                  06-15-2009                      1324.13</p>


# SIGN HANGER ERECTION DETAIL WITH LUMINAIRE RETRIEVAL SYSTEM

OSS-1

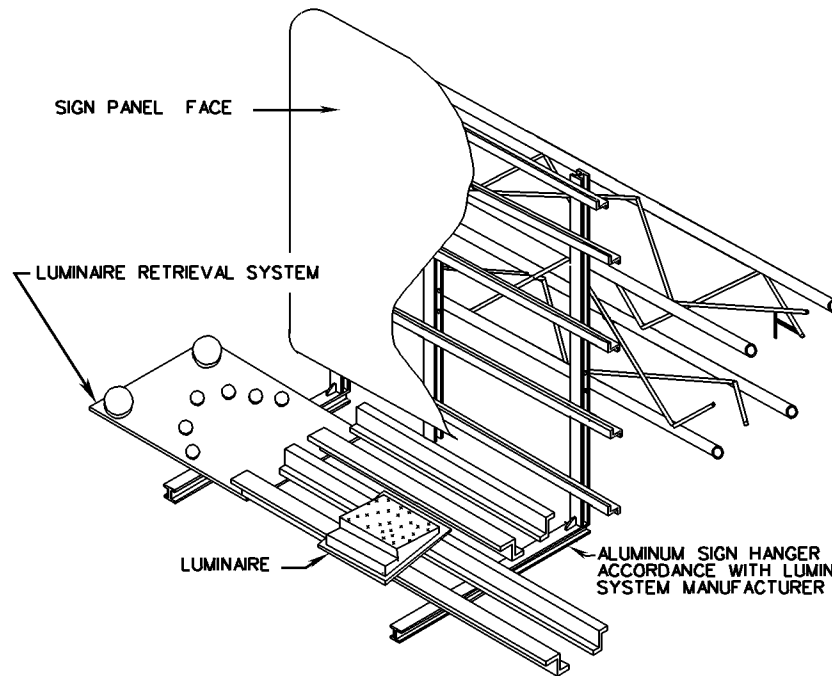


ALUMINUM SIGN HANGER W4 X 3.06 PLACED NO GREATER THAN 2' 3" FROM THE LEFT AND RIGHT EDGES OF SIGN PANEL AND THEN SPACED 4' 6" O.C. MAXIMUM.


TOP OF SIGN SHALL BE TILTED TOWARDS TRAFFIC SO THAT THE SIGN FACE IS 3° FROM VERTICAL.

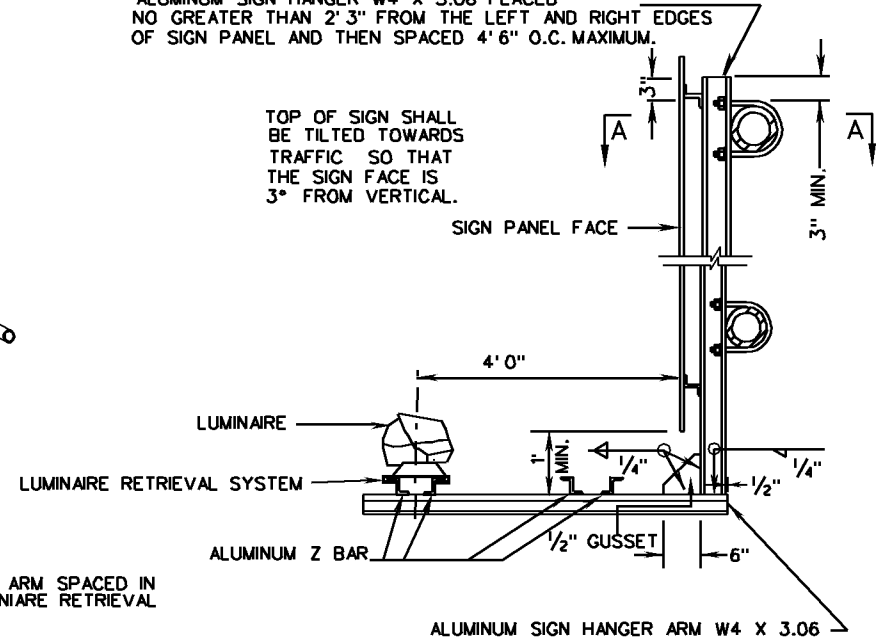

## SECTION A-A

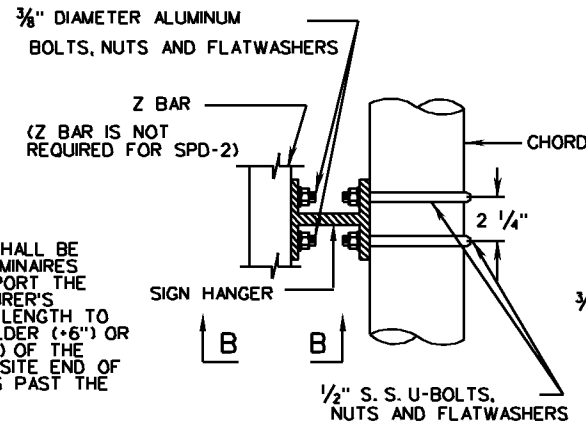

## SECTION B-B

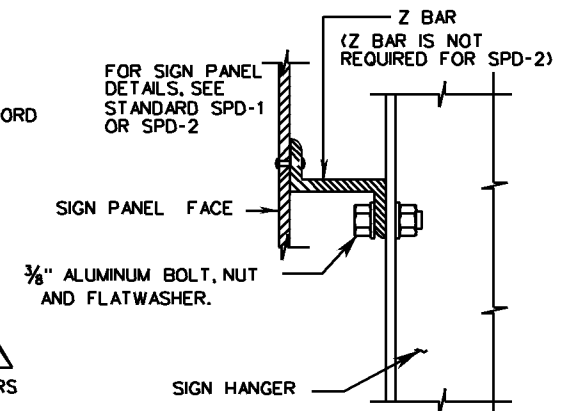

### NOTE:

LUMINAIRE RETRIEVAL SYSTEM INCLUDING ELECTRICAL SYSTEM SHALL BE EQUAL TO "LUMI-TRAK" AND DESIGNED FOR THE NUMBER OF LUMINAIRES INDICATED ON THE PLANS. SPACING OF HANGERS USED TO SUPPORT THE RETRIEVAL SYSTEM SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS. TURNABLE END SHALL BE OF SUFFICIENT LENGTH TO ALIGN WITH THE VERTICAL EDGE OF THE OUTSIDE PAVED SHOULDER (+6") OR SHALL BE EXTENDED 5 FEET BEYOND THE VERTICAL EDGE (+6") OF THE OUTERMOST SIGN LUMINAIRE, WHICHEVER IS GREATER. THE OPPOSITE END OF THE RETRIEVAL SYSTEM SHALL EXTEND A MINIMUM OF 6 INCHES PAST THE OUTERMOST VERTICAL EDGE OF THE SIGN HANGER ARM.

LUMINAIRES AND LUMINAIRE RETRIEVAL SYSTEM REQUIRED ONLY WHERE INDICATED ON THE PLANS.

SPECIFICATION REFERENCE

700

## OVERHEAD SIGN STRUCTURE SIGN HANGER AND LUMINAIRE RETRIEVAL DETAIL

VIRGINIA DEPARTMENT OF TRANSPORTATION


VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE  
6-15-09

SHEET 6 OF 7

1324.15

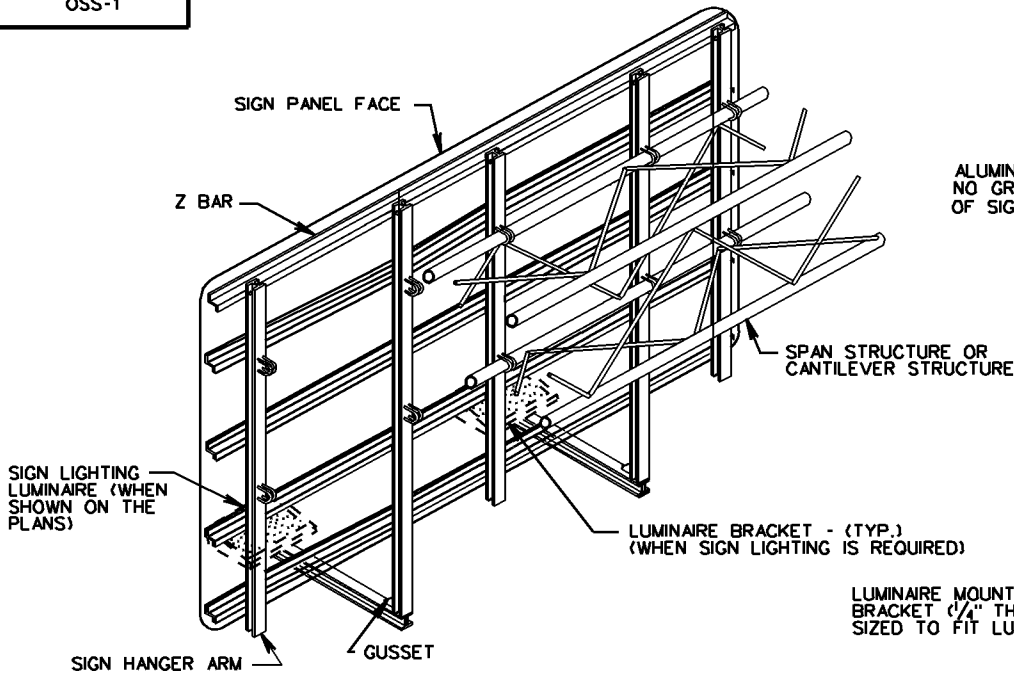


SIGN ATTACHMENT TO TRUSS-TYPE STRUCTURES

SIGN HANGER ERECTION DETAIL WITH LUMINAIRE

(WHEN NO LUMINAIRE RETRIEVAL SYSTEM IS REQUIRED)

ALUMINUM SIGN HANGER W4 X 3.06 PLACED NO GREATER THAN 2' 3" FROM THE LEFT AND RIGHT EDGES OF SIGN PANEL AND THEN SPACED 4' 6" O.C. MAXIMUM.

TOP OF SIGN SHALL BE TILTED TOWARDS TRAFFIC SO THAT THE SIGN FACE IS 3° FROM VERTICAL.

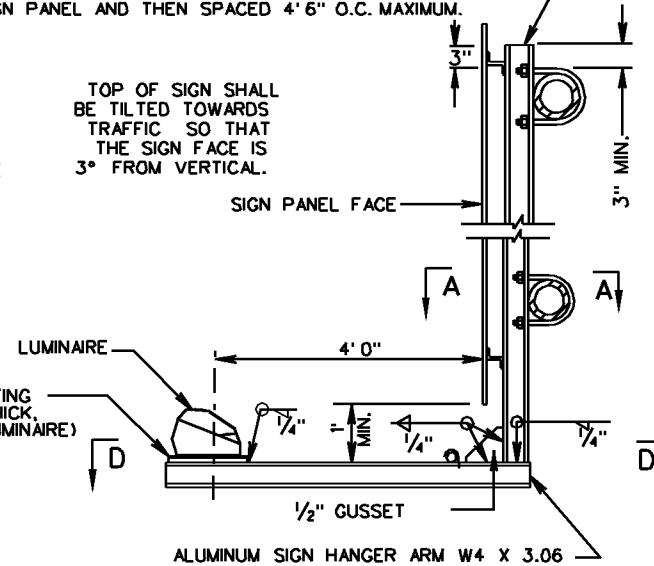


NOTE


LUMINAIRES REQUIRED WHERE INDICATED ON THE PLANS.

LUMINAIRE TO BE ATTACHED TO MOUNTING BRACKET WITH FOUR, 3/8" DIA. GALVANIZED CAP SCREWS, LOCKWASHERS AND NUTS.


SECTION A-A

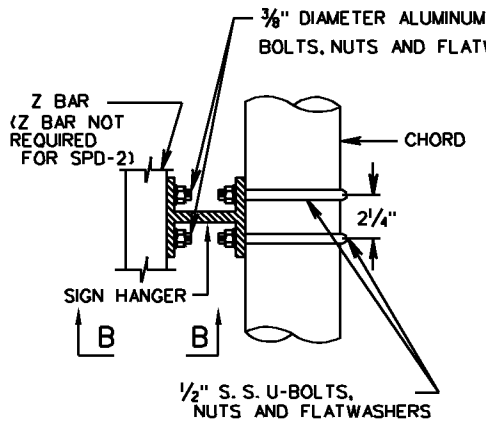

SECTION B-B

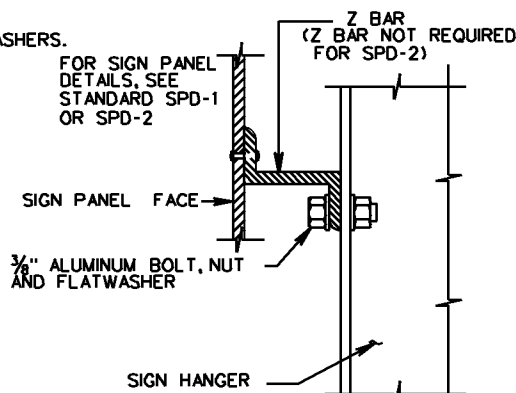

SECTION D-D

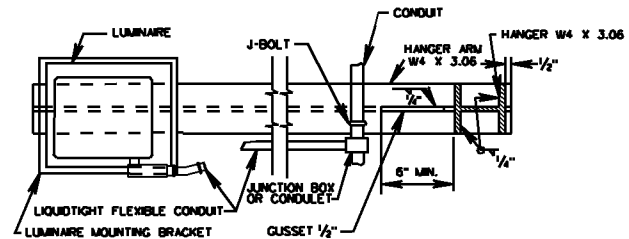

ROAD AND BRIDGE STANDARDS

SHEET 7 OF 7

REVISION DATE  
6-15-09

1324.16

OVERHEAD SIGN STRUCTURE

HANGER AND LUMINAIRE DETAIL


VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE


700




TYPE R

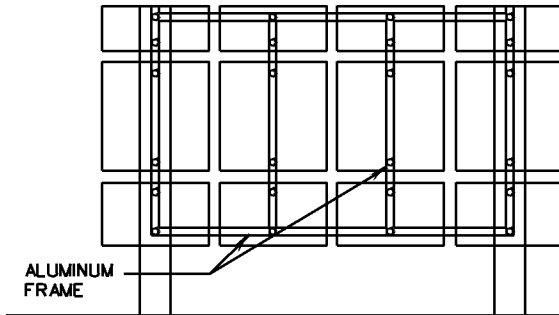


TYPE S




TYPE T

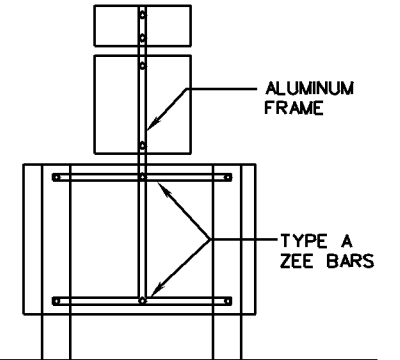


TYPE U

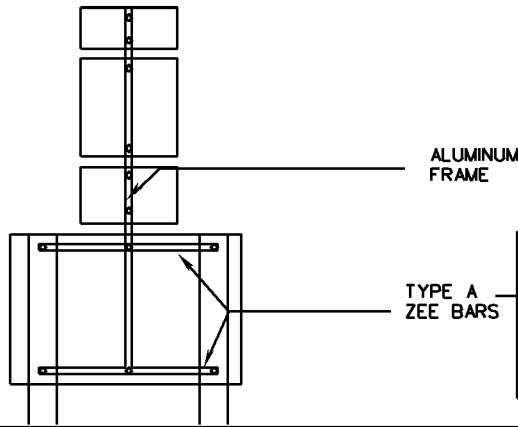

TYPE V

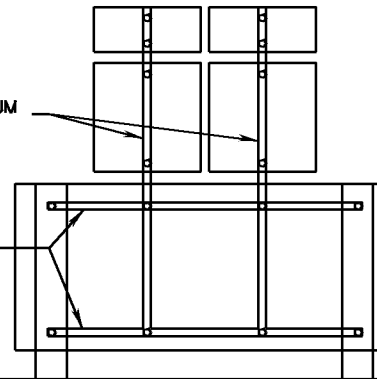


TYPE W

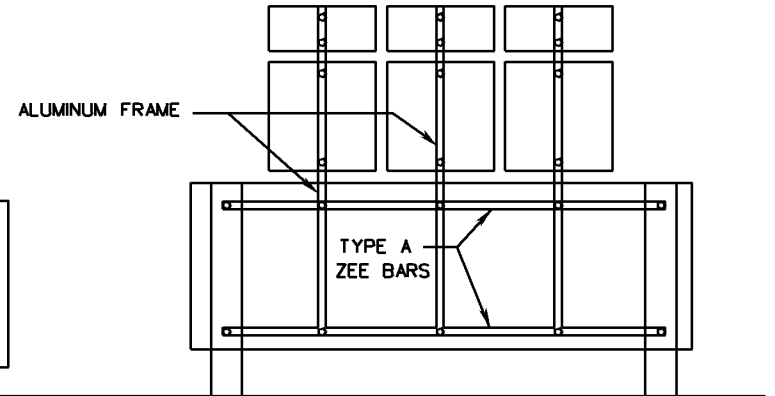

ALUMINUM FRAMING

SIGN PANEL ATTACHMENT DETAILS

(FOR SIGN PANEL ATTACHMENT TO Z BARS, SEE STANDARD SPD-1)

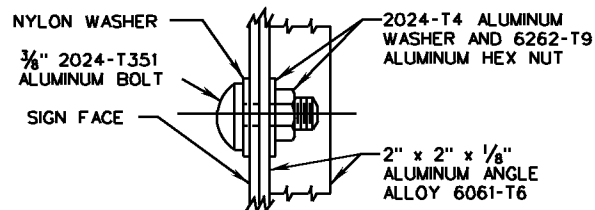

NOTES

NYLON WASHER SHALL BE 1/8" THICK MINIMUM WITH AN OUTSIDE DIAMETER OF 1" AND AN INSIDE DIAMETER OF 7/16".

TO OBTAIN A FLUSH MOUNTING SURFACE FOR SIGNS, ALL WOOD POST SHALL BE MORTISED WHERE NECESSARY TO RECESS THE FLANGE OF ALUMINUM ANGLE.

THE TYPE A ZEE BARS SHALL BE 2 3/8" x 1 1/4" x 3/16".

ALL VERTICAL AND HORIZONTAL SPACING BETWEEN SIGNS IN AN ASSEMBLY SHALL BE ONE INCH UNLESS SPECIFIED.

THESE ARE TYPICAL SIGN PANEL ASSEMBLIES; ALL ASSEMBLIES SHALL BE IN ACCORDANCE WITH PLAN DETAILS.

SPECIFICATION REFERENCE

701

SIGN PANEL DESIGN

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT


ROAD AND BRIDGE STANDARDS

REVISION DATE 6-15-09


SHEET 2 OF 2

1325.51


TYPES VA-B, VA-C, VA-D,  
VA-L AND VA-M

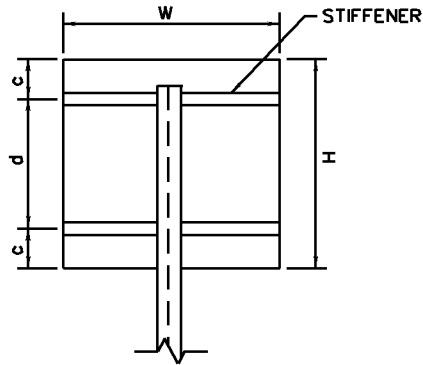


TYPES VA-E

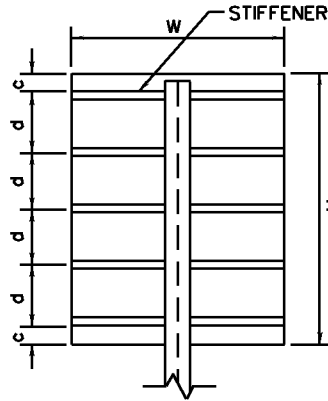



TYPES VA-F

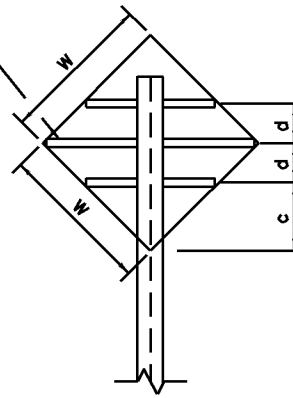

TYPES VA-G

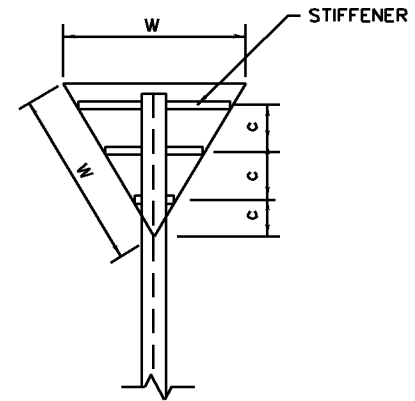


TYPES VA-K

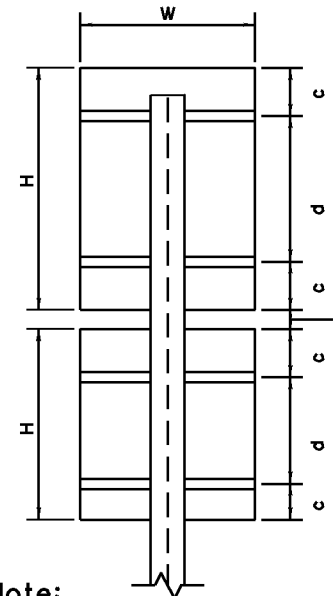

STIFFENER TO POST  
ATTACHMENT DETAIL

MEDIUM STIFFENER  
DETAIL

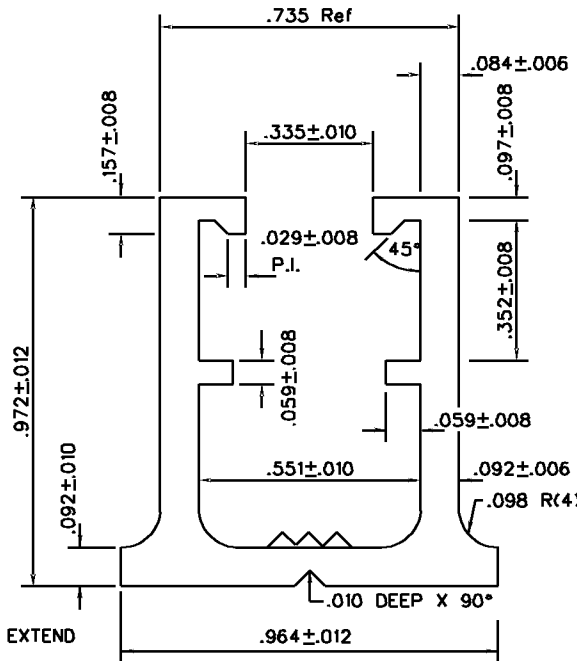

**Note:**

RIVETS SHALL BE USED FOR SECURING THE STIFFENERS TO THE SIGN UNLESS OTHERWISE SPECIFIED OR APPROVED, AND SHALL BE 3/16" MINIMUM DIAMETER BY 1/2" LONG ALUMINUM AND CAPABLE OF WITHSTANDING A MINIMUM SHEAR FORCE OF 460LBS. RIVET SPACING FOR ATTACHING THE STIFFENERS TO THE SIGN PANEL SHALL BE 6" MAXIMUM BEGINNING 1 1/2" FROM THE ENDS OF THE SIGN PANEL.

STRUCTURE TYPE	W	H	c	d	STIFFENERS	
					NO.	SIZE
VA-B	4'	4'	6 1/2"	2'-11"	2	MEDIUM
VA-C	4'	5'	12 1/2"	2'-11"	2	MEDIUM
VA-D	5'	3'	7"	1'-10"	2	MEDIUM
VA-E	6'	5'	0"	1'-3"	5	MEDIUM
VA-F	4'	—	8"	2'-2"	3	MEDIUM
VA-G	5'	—	1'-4"	—	3	MEDIUM
VA-K	4'	5'	12 1/2"	2'-11"	2	MEDIUM
	4'	4'	6 1/2"	2'-11"	2	MEDIUM
VA-L	6'	6'	6"	1'-3"	5	MEDIUM
VA-M	5'	5'	8"	1'-10"	3	MEDIUM

SEE STANDARD SPD-4 FOR POST CLAMP AND BOLT DETAILS.

UNLESS OTHERWISE NOTED THE TOP OF THE SIGN PANEL SHALL NOT EXTEND ABOVE THE SIGN POST NO GREATER THAN THE DISTANCE OF 1/2 c.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE  
6-15-09



1325.60

SIGN PANEL DESIGN

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

701

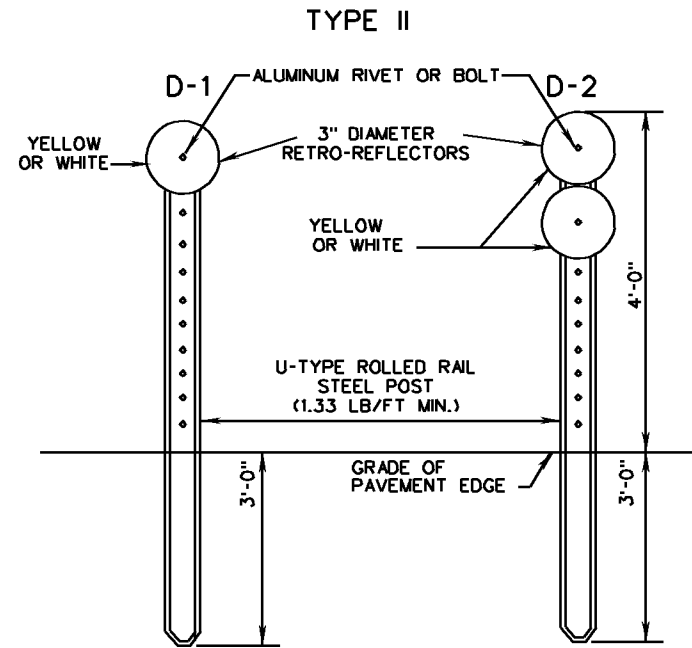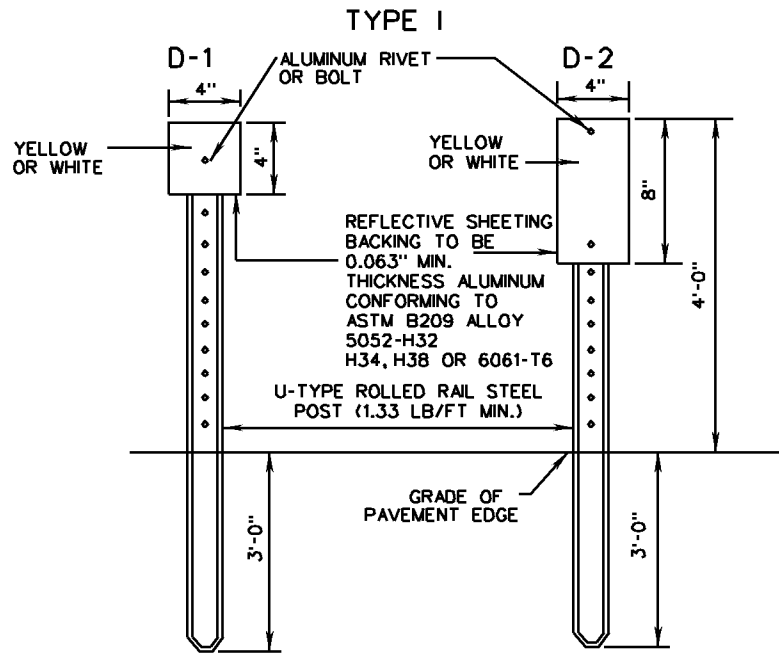

**NOTES:**

ROAD EDGE DELINEATORS ARE TO BE ERECTED TWO FEET BEYOND THE OUTER EDGE OF THE SHOULDER OR THE FACE OF UNMOUNTABLE CURB.

D-1 DELINEATORS SHALL BE PLACED ON THE RIGHT OF THROUGH ROADWAYS AT 528 FOOT SPACING WITH THE FOLLOWING EXCEPTIONS:

TANGENT ROADWAYS WHERE PAVEMENT MARKERS ARE INSTALLED WILL NOT REQUIRE THE INSTALLATION OF DELINEATORS.

LOCATIONS WHERE DELINEATORS ARE INSTALLED ON GUARDRAILS, PARAPETS OR BARRIERS ON THE RIGHT OF THE ROADWAY WILL NOT REQUIRE THE INSTALLATION OF ROAD EDGE DELINEATORS.

D-1 DELINEATORS SHALL BE PLACED ON AT LEAST ONE SIDE AND ON THE OUTSIDE CURVE OF INTERCHANGE RAMP EXCEPT WHERE DELINEATORS ARE INSTALLED ON GUARDRAILS, PARAPETS OR BARRIERS. THE SPACING ALONG THE RAMP SHALL BE AT 100' INTERVALS EXCEPT IN HORIZONTAL CURVES WHERE THE SPACING SHALL CONFORM TO THE CHART ON SPACING FOR HIGHWAY DELINEATORS.

D-2 DELINEATORS SHALL BE PLACED ON ACCELERATION LANES AND DECELERATION LANES AT 100' SPACING.

THE COLOR OF DELINEATORS SHALL CONFORM TO THE COLOR OF THE ADJACENT EDGELINES.

**SPACING FOR HIGHWAY DELINEATORS ON HORIZONTAL CURVES**

DISTANCE IN FEET ROUNDED TO THE NEAREST 5'.

RADIUS OF CURVE IN FEET	SPACING ON CURVE IN FEET
50	20
150	30
200	35
250	40
300	50
400	55
500	65
600	70
700	75
800	80
900	85
1000	90

SPACING FOR SPECIFIC RADIUS NOT SHOWN MAY BE INTERPOLATED FROM TABLE. THE MINIMUM SPACING SHOULD BE 20'. THE SPACING ON CURVES SHOULD NOT EXCEED 300'. IN ADVANCE OF OR BEYOND A CURVE, AND PROCEEDING AWAY FROM THE END OF THE CURVE, THE SPACING OF THE FIRST DELINEATOR IS 25, THE SECOND IS 35 AND THE THIRD IS 65 BUT NOT TO EXCEED 300'. S REFERS TO THE DELINEATOR SPACING, IN FEET, FOR SPECIFIC RADIUS COMPUTED FROM THE FORMULA  $S = 3 \sqrt{R-50}$

SPECIFICATION REFERENCE  702	<h2 style="margin: 0;">INTERSTATE ROAD EDGE DELINEATORS</h2> <h3 style="margin: 0;">TYPICAL DETAILS</h3> <p style="margin: 0;">VIRGINIA DEPARTMENT OF TRANSPORTATION</p>	ROAD AND BRIDGE STANDARDS REVISION DATE 6-15-09 SHEET 1 OF 1 1327.20
---------------------------------------	--	---