
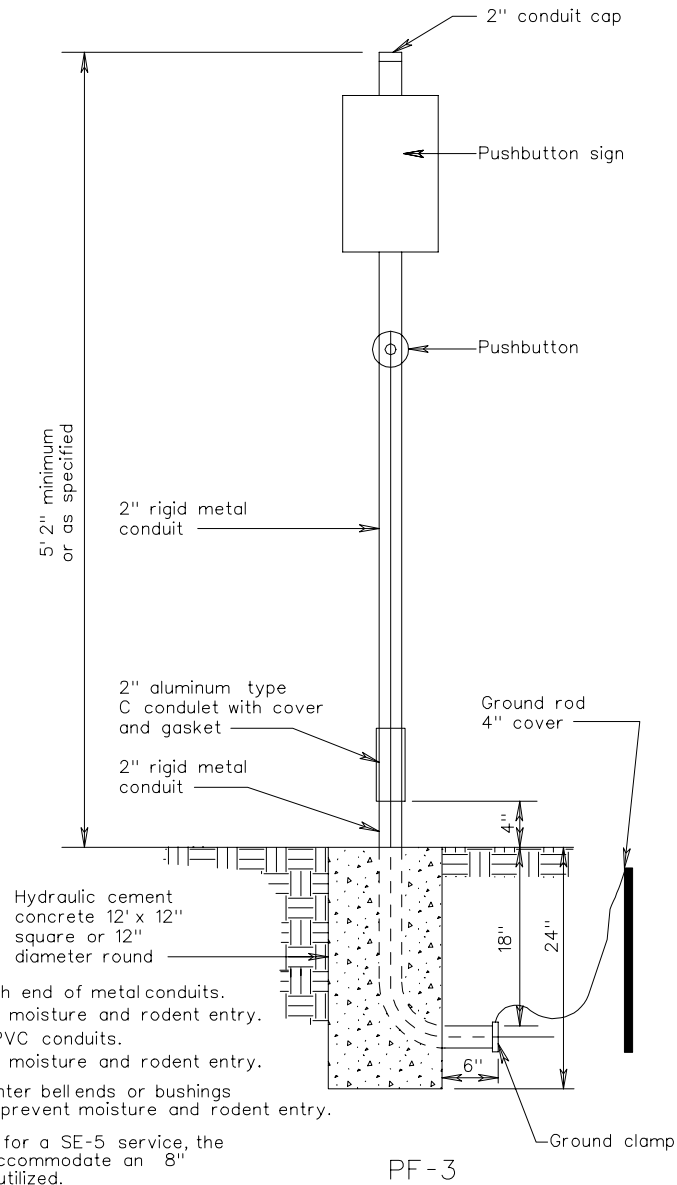


**Notes:**

Each foundation shall be permanently marked to indicate all sides from which conduits pass. This mark shall be made with a trowel when finishing the concrete and shall be 1/4" deep and 4" to 6" long. When foundation extends 2" above finished grade, all edges shall be chamfered 3/4".

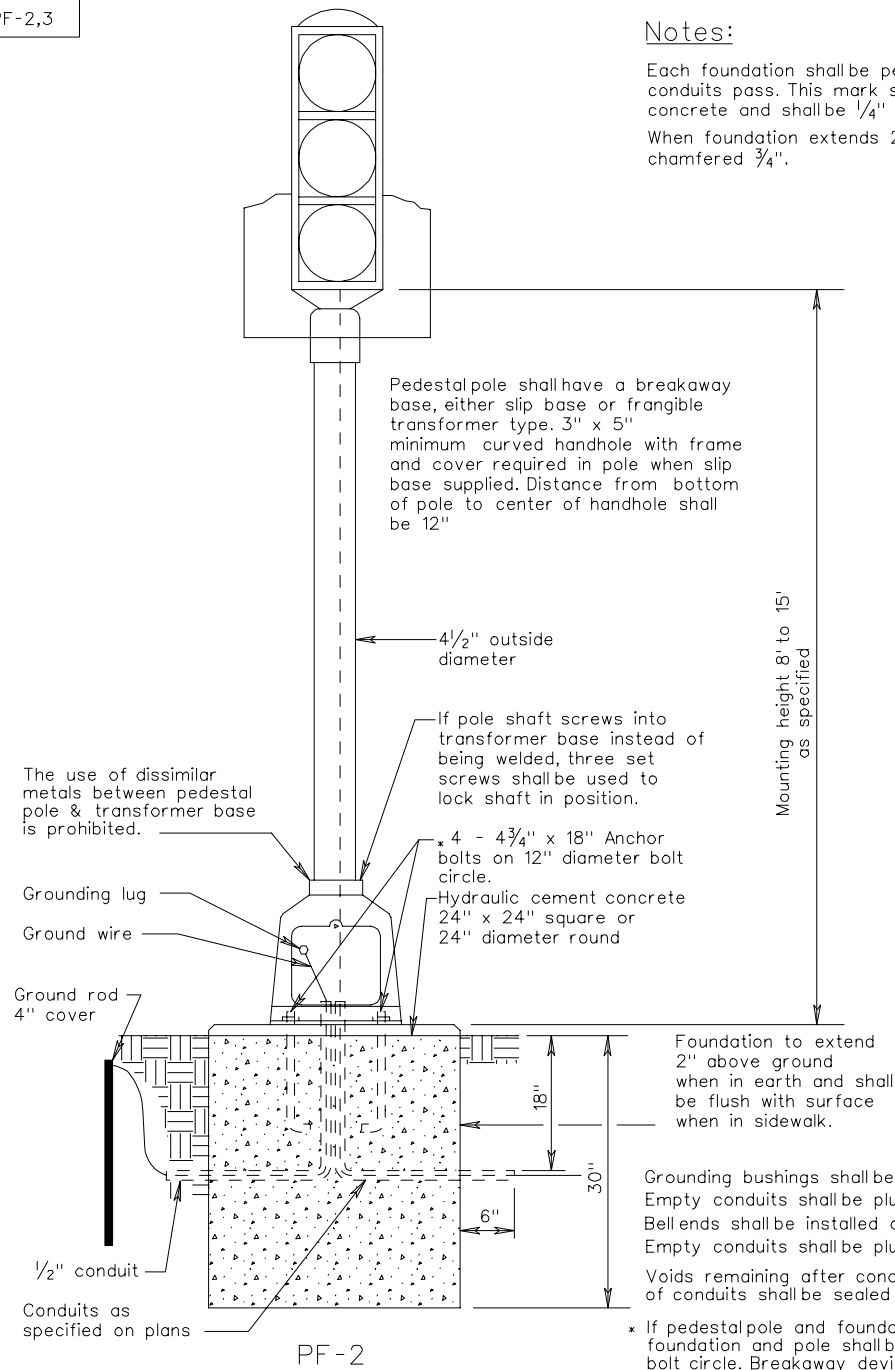

Grounding bushings shall be installed on each end of metal conduits. Empty conduits shall be plugged to prevent moisture and rodent entry. Bell ends shall be installed on each end of PVC conduits. Empty conduits shall be plugged to prevent moisture and rodent entry. Voids remaining after conductors exit or enter bell ends or bushings of conduits shall be sealed with silicone to prevent moisture and rodent entry.

\* If pedestal pole and foundation are utilized for a SE-5 service, the foundation and pole shall be designed to accommodate an 8" bolt circle. Breakaway devices shall not be utilized.

PEDESTAL POLE AND FOUNDATION DETAILS