

NOTES:

GUARDRAIL INSTALLATION CRITERIA AS SHOWN ON THESE SHEETS IS TO APPLY TO THOSE LOCATIONS WHERE GUARDRAIL HAS TO BE TRANSITIONED FROM THE NORMAL LOCATION.

LENGTH OF TRANSITION (L) IS TO BE IN ACCORDANCE WITH TABLE III OR IV FOR APPLICABLE VALUES OF W OR AS DIRECTED BY THE ENGINEER.

RAIL TERMINAL SECTIONS IN ACCORDANCE WITH STANDARD GR-6, GR-7 OR GR-8 ARE TO BE INSTALLED AT EACH TERMINUS OF GUARDRAIL WHERE SPECIFIED ON PLANS.

ALL LENGTHS (L) ARE APPLIED ALONG FACE OF GUARDRAIL.

OFFSETS SHOWN IN TABLES ARE FOR 6'-3" SPACING. FOR 12'-6" SPACING (GR-8) USE EVERY SECOND VALUE FOR Y.

INSTALLATION METHODS SHOWN ON THESE SHEETS ARE APPLICABLE TO STANDARD PLANS GR-2, GR-2A AND GR-8.

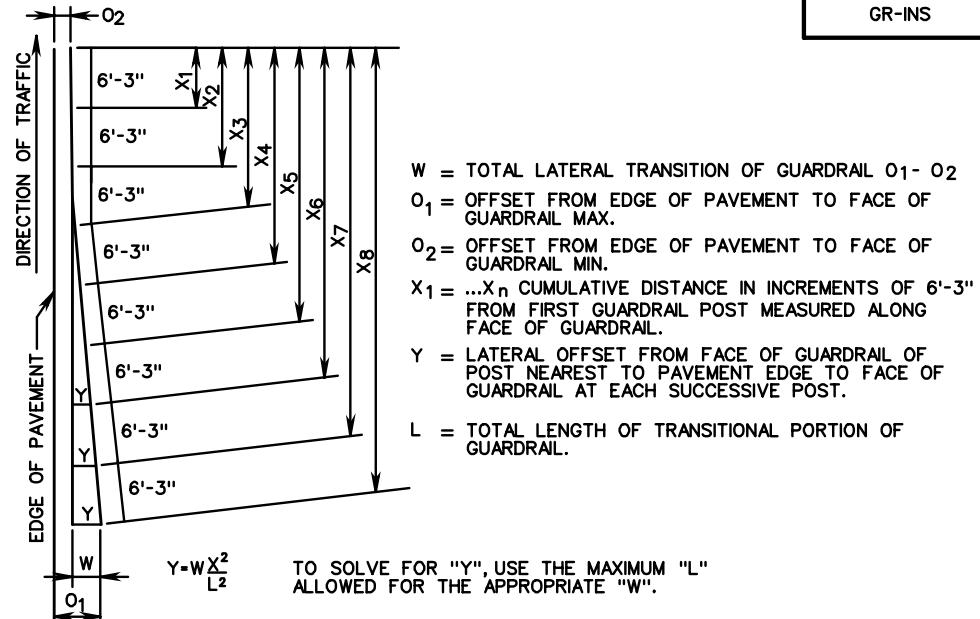


TABLE III
OFFSETS (Y) FOR INTRODUCED GUARDRAIL TRANSITIONS

LENGTH L IN FEET	X	W-2'	W-3'	W-4'	W-5'	W-6'	W-7'	W-8'	W-9'	W-10'	W-11'	W-12'	W-13'	W-14'	W-15'	W-16'	W-17'	W-18'	W-19'	W-20'	
	X ₁	6.25	0.06	0.05	0.03	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03		
37.50	X ₂	12.50	0.22	0.19	0.11	0.08	0.06	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.10	0.10	0.11	0.12	0.13	0.14	
	X ₃	18.75	0.50	0.42	0.25	0.18	0.14	0.11	0.12	0.14	0.16	0.17	0.19	0.20	0.22	0.23	0.25	0.27	0.28	0.30	0.31
	X ₄	25.00	0.89	0.75	0.44	0.31	0.24	0.19	0.22	0.25	0.28	0.31	0.33	0.36	0.39	0.42	0.44	0.47	0.50	0.53	0.56
	X ₅	31.25	1.39	1.17	0.69	0.49	0.38	0.30	0.35	0.39	0.43	0.48	0.52	0.56	0.61	0.65	0.69	0.74	0.78	0.82	0.87
	X ₆	37.50	2.00	1.69	1.00	0.70	0.54	0.44	0.50	0.56	0.62	0.69	0.75	0.81	0.87	0.94	1.00	1.06	1.13	1.19	1.25
50.00	X ₇	43.75	2.30	1.36	0.96	0.74	0.60	0.68	0.77	0.85	0.94	1.02	1.11	1.19	1.28	1.36	1.45	1.53	1.62	1.70	
	X ₈	50.00	3.00	1.78	1.25	0.96	0.78	0.89	1.00	1.11	1.22	1.33	1.44	1.56	1.67	1.78	1.89	2.00	2.11	2.22	
75.00	X ₉	56.25		2.25	1.58	1.22	0.98	1.12	1.27	1.41	1.55	1.69	1.83	1.97	2.11	2.25	2.39	2.53	2.67	2.81	
	X ₁₀	62.50		2.78	1.95	1.50	1.22	1.39	1.56	1.74	1.91	2.08	2.26	2.43	2.60	2.78	2.95	3.13	3.30	3.47	
	X ₁₁	68.75		3.36	2.36	1.82	1.47	1.68	1.89	2.10	2.31	2.52	2.73	2.94	3.15	3.36	3.57	3.78	3.99	4.20	
	X ₁₂	75.00		4.00	2.81	2.16	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	
87.50	X ₁₃	82.25			3.30	2.54	2.05	2.35	2.64	2.93	3.23	3.52	3.81	4.11	4.40	4.69	4.99	5.28	5.57	5.87	
	X ₁₄	87.50			3.83	2.94	2.38	2.72	3.06	3.40	3.74	4.08	4.42	4.76	5.10	5.44	5.78	6.13	6.47	6.81	
100.00	X ₁₅	93.75			4.39	3.38	2.73	3.12	3.52	3.91	4.30	4.69	5.08	5.47	5.86	6.25	6.64	7.03	7.42	7.81	
	X ₁₆	100.00			5.00	3.84	3.11	3.56	4.00	4.44	4.89	5.33	5.78	6.22	6.67	7.11	7.56	8.00	8.44	8.89	
125.00	X ₁₇	106.25				4.33	3.51	4.01	4.52	5.02	5.52	6.02	6.52	7.02	7.53	8.03	8.53	9.03	9.53	10.03	
	X ₁₈	112.50				4.86	3.94	4.50	5.06	5.62	6.19	6.75	7.31	7.87	8.44	9.00	9.56	10.13	10.69	11.25	
	X ₁₉	118.75				5.41	4.39	5.01	5.64	6.27	6.89	7.52	8.15	8.77	9.40	10.03	10.65	11.28	11.91	12.53	
	X ₂₀	125.00				6.00	4.86	5.56	6.25	6.94	7.64	8.33	9.03	9.72	10.42	11.11	11.81	12.50	13.19	13.89	
150.00	X ₂₁	131.25					5.36	6.12	6.89	7.66	8.42	9.19	9.95	10.72	11.48	12.25	13.02	13.78	14.55	15.31	
	X ₂₂	137.50					5.88	6.72	7.56	8.40	9.24	10.08	10.92	11.76	12.60	13.44	14.28	15.13	15.97	16.81	
	X ₂₃	143.75					6.43	7.35	8.27	9.18	10.10	11.02	11.94	12.86	13.78	14.69	15.61	16.53	17.45	18.37	
	X ₂₄	150.00					7.00	8.00	9.00	10.00	11.00	12.00	13.00	14.00	15.00	16.00	17.00	18.00	19.00	20.00	

SPECIFICATION
REFERENCE

W-BEAM GUARDRAIL INSTALLATION CRITERIA

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

221
505

REVISION DATE

SHEET 4 OF 8

501.37