

STANDARD	TITLE	PAGE
GR-HDW	STANDARD W-BEAM GUARDRAIL HARDWARE	501.01
	STANDARD W-BEAM GUARDRAIL HARDWARE	501.02
	STANDARD THRIE BEAM GUARDRAIL HARDWARE	501.03
GR-2, 2A	STANDARD BLOCKED-OUT W-BEAM GUARDRAIL (STRONG POST SYSTEM)	501.04
	STANDARD BLOCKED-OUT W-BEAM GUARDRAIL (STRONG POST SYSTEM) POST AND BLOCKOUT DETAILS	501.05
GR-3	CABLE GUARDRAILS	501.06
	CABLE GUARDRAILS	501.07
	CABLE GUARDRAILS	501.08
GR-6	TERMINAL TREATMENT FOR W-BEAM GUARDRAIL	501.09
	TERMINAL TREATMENT FOR W-BEAM GUARDRAIL	501.10
GR-7	BREAKWAY CABLE TERMINAL - 4' FLARE	501.11
	BREAKWAY CABLE TERMINAL - 4' FLARE	501.12
	BREAKWAY CABLE TERMINAL - 4' FLARE (SITE PREPARATION)	501.13
GR-8, 8A, 8B, 8C	STANDARD W-BEAM GUARDRAIL (WEAK POST SYSTEM)	501.14
	STANDARD W-BEAM GUARDRAIL (WEAK POST SYSTEM)	501.15
GR-9	ALTERNATE BREAKAWAY CABLE TERMINAL - NO FLARE	501.16
	ALTERNATE BREAKAWAY CABLE TERMINAL - NO FLARE (SITE PREPARATION)	501.17
GR-10	GUARDRAIL AT LOW-FILL CULVERT	501.18
	GUARDRAIL AT LOW-FILL CULVERT	501.19
GR-11	TRAILING END TERMINAL TREATMENT	501.20
BGR-01	STANDARD BOX CULVERT GUARDRAIL (TEXAS T6)	501.22
	STANDARD BOX CULVERT GUARDRAIL (TEXAS T6)	501.23
	STANDARD BOX CULVERT GUARDRAIL (TEXAS T6)	501.24
GR-FOA-1	W BEAM GUARDRAIL-FIXED OBJECT ATTACHMENT FOR USE WITH VERTICAL FIXED OBJECTS AND GUARDRAIL (WOOD POSTS)	501.25
	W BEAM GUARDRAIL-FIXED OBJECT ATTACHMENT FOR USE WITH VERTICAL FIXED OBJECTS AND GUARDRAIL (STEEL POSTS)	501.26
	W BEAM GUARDRAIL-FIXED OBJECT ATTACHMENT RUBRAIL AND HARDWARE DETAILS	501.27
GR-FOA-2	W BEAM GUARDRAIL-FIXED OBJECT ATTACHMENT FOR USE BETWEEN SAFETY SHAPE AND AND GUARDRAIL (WOOD POSTS)	501.28
	W BEAM GUARDRAIL-FIXED OBJECT ATTACHMENT FOR USE BETWEEN SAFETY SHAPE AND AND GUARDRAIL (STEEL POSTS)	501.29
GR-FOA-2, & 4	W BEAM GUARDRAIL-FIXED OBJECT ATTACHMENT RUBRAIL AND HARDWARE DETAILS	501.30
GR-FOA-4	BLOCKED-OUT W-BEAM MEDIAN BARRIER - FIXED OBJECT ATTACHMENT FOR USE BETWEEN MB-7 AND MB-3	501.31
	BLOCKED-OUT W-BEAM MEDIAN BARRIER - FIXED OBJECT ATTACHMENT RUBRAIL AND HARDWARE DETAILS	501.32
FOA-CZ	W-BEAM GUARDRAIL INSTALLATION CRITERIA (FIXED OBJECT ATTACHMENT METHODS FOR CONSTRUCTION ZONES)	501.33
GR-INS	W-BEAM GUARDRAIL INSTALLATION CRITERIA	501.34
	W-BEAM GUARDRAIL INSTALLATION CRITERIA	501.35
	W-BEAM GUARDRAIL INSTALLATION CRITERIA	501.36
	W-BEAM GUARDRAIL INSTALLATION CRITERIA	501.37

INDEX OF SHEETS
SECTION 500-GUARDRAIL, BARRIER AND FENCE

VIRGINIA DEPARTMENT OF TRANSPORTATION



ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 2

500.01

STANDARD	TITLE	PAGE
GR-INS	W BEAM GUARDRAIL INSTALLATION CRITERIA	501.38
	W BEAM GUARDRAIL INSTALLATION CRITERIA	501.39
	W BEAM GUARDRAIL INSTALLATION CRITERIA	501.40
	W BEAM GUARDRAIL AND MEDIAN BARRIER INSTALLATION CRITERIA	501.41
MB-3	BLOCKED-OUT W BEAM MEDIAN BARRIER	502.01
MB-5	STANDARD W BEAM MEDIAN BARRIER (WEAK POST SYSTEM)	502.02
	STANDARD W BEAM MEDIAN BARRIER (WEAK POST SYSTEM)	502.03
MB-7D, 7E, 7F	CONCRETE MEDIAN BARRIER	502.04
MB-7D PC	PRECAST TRAFFIC BARRIER CONCRETE SERVICE	502.05
	PRECAST TRAFFIC BARRIER CONCRETE SERVICE	502.06
MB-8A	CONCRETE MEDIAN BARRIER TYPE I, II OR III	502.07
	CONCRETE MEDIAN BARRIER TYPE I, II, OR III	502.08
MB-9A	CAST IN PLACE CONCRETE MEDIAN BARRIER 12 FOOT TERMINAL SECTION.	502.09
MB-9A, PC	PRECAST CONCRETE MEDIAN BARRIER 12 FOOT TERMINAL SECTION	502.10
MB-10A	TRAFFIC BARRIER SERVICE CONCRETE PARAPET (SINGLE FACE) (FOR TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)	502.11
	TRAFFIC BARRIER SERVICE CONCRETE PARAPET (SINGLE FACE) (FOR TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)	502.12
MB-11A	TRAFFIC BARRIER SERVICE CONCRETE PARAPET (DOUBLE FACE) (FOR TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)	502.13
	TRAFFIC BARRIER SERVICE CONCRETE PARAPET (DOUBLE FACE) (FOR TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)	502.14
	TRAFFIC BARRIER SERVICE CONCRETE PARAPET (DOUBLE FACE) (FOR TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)	502.15
MB-12A, B, C	CONCRETE MEDIAN BARRIER (TALL WALL)	502.16
	CONCRETE MEDIAN BARRIER (TALL WALL)	502.17
MB-13	CONCRETE MEDIAN BARRIER TYPE I, II OR III	502.18
	CONCRETE MEDIAN BARRIER TYPE I, II OR III	502.19
MB-INS	PRECAST CONCRETE MEDIAN BARRIER POSITIVE CONNECTION OPTIONS	502.20
	PRECAST CONCRETE MEDIAN BARRIER POSITIVE CONNECTION OPTIONS	502.21
	PRECAST CONCRETE MEDIAN BARRIER POSITIVE CONNECTION OPTIONS	502.22
	BUTTING TRAFFIC BARRIER SERVICE TO SINGLE FACE PARAPET SERVICE	502.23
	BUTTING TRAFFIC BARRIER SERVICE TO SINGLE FACE PARAPET SERVICE	502.24
	STANDARD FENCE GENERAL NOTES	503.01
FE-W1, W2	STANDARD FENCE WOVEN WIRE FABRIC	503.02
FE-B	STANDARD FENCE BARBED WIRE	503.03
FE-CL	STANDARD FENCE CHAIN LINK	503.04
FE-G	STANDARD FENCE GATES	503.05
FE-4	WATER GATES IN FENCE LINES	503.06
FE-6	STANDARD METHOD OF FENCE AND HANDRAIL GROUNDING	503.07
RM-1	STANDARD PLAN AND METHOD OF SETTING RIGHT-OF-WAY MONUMENTS	504.01
RM-2	STANDARD PLAN AND METHOD OF SETTING RIGHT-OF-WAY MONUMENTS	504.02



ROAD AND BRIDGE STANDARDS

SHEET 2 OF 2


REVISION DATE

500.02


INDEX OF SHEETS

SECTION 500-GUARDRAIL, BARRIER AND FENCE


VIRGINIA DEPARTMENT OF TRANSPORTATION

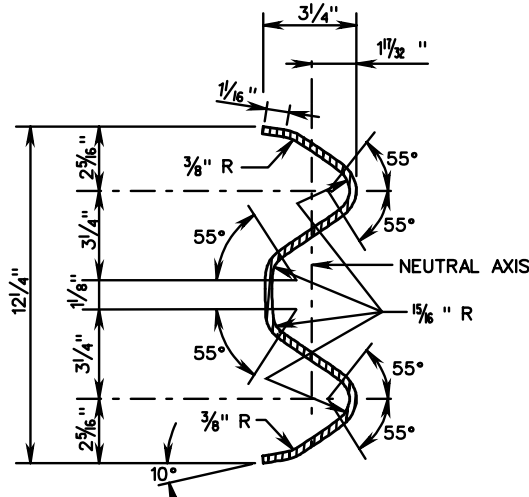


SECTION THRU RAIL ELEMENT AND W BEAM BACK-UP PLATE



W BEAM
BACK - UP PLATE
FOR USE AT NON SPLICE
LOCATIONS.
TO BE USED WITH STEEL
W6 x 9 OR W6 x 8.5
BLOCKOUT ONLY.

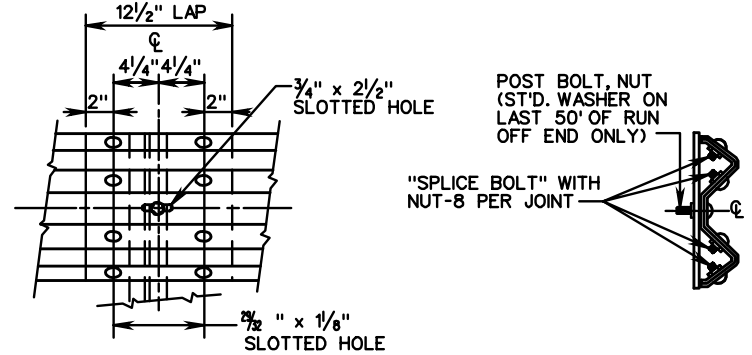


DETAIL OF SPLICE JOINT

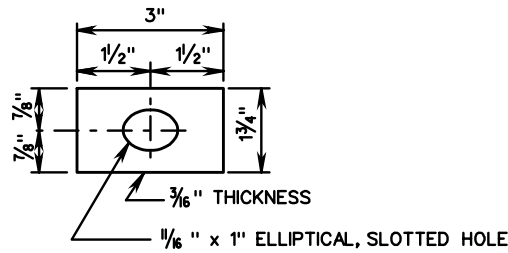

DETAIL OF STANDARD WASHER

FOR GR-2 AND 2A, MB-3
TO BE USED ON THE LAST
50' OF RUN OFF ENDS ONLY.

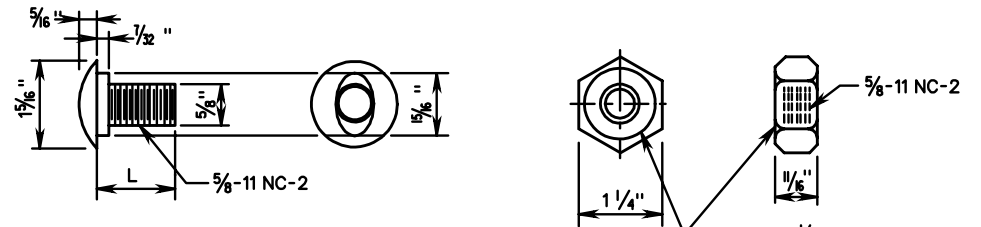

DETAIL OF BUTTON HEAD BOLT AND RECESS NUT

L- 1 1/4" FOR SPLICE BOLT-FULL LENGTH THREADS
L- 2" FOR STEEL POST BOLT-1 1/2" MIN. THREADS
L- 18" FOR WOOD AND CONCRETE POST BOLT-2 1/2" MIN. THREADS
L- 26" FOR MB WOOD OR CONCRETE POST-2" MIN. THREADS

NOTES:

ALL HARDWARE IS TO BE GALVANIZED IN ACCORDANCE WITH THE SPECIFICATIONS.


THE GUARDRAIL AND MEDIAN BARRIER COMPONENTS DEPICTED IN ARTBA TECHNICAL BULLETIN NUMBER 268B MAY BE SUBSTITUTED IF INTERCHANGEABLE WITH THE STANDARDS FOR GUARDRAIL (GR) OR MEDIAN BARRIER (MB) AND APPROVED BY THE ENGINEER.

SPECIFICATION REFERENCE
221
505




STANDARD GUARDRAIL HARDWARE

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 3
501.01	

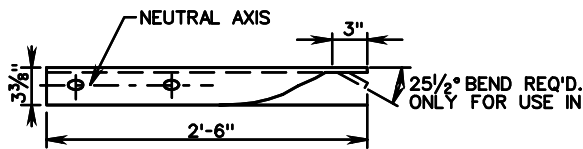


NOTE:
LAP IN DIRECTION OF
TRAFFIC AT SPLICE JOINT.

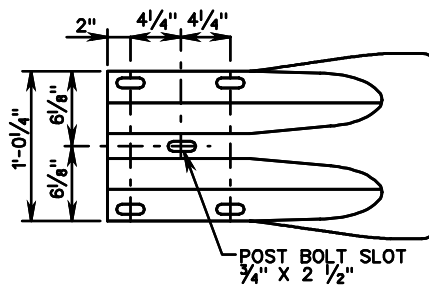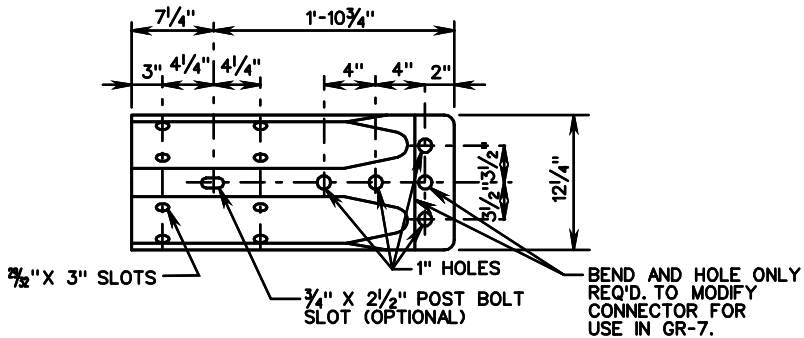
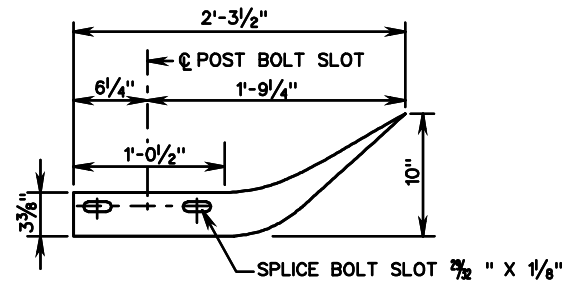


W BEAM TERMINAL CONNECTOR

W BEAM END SECTION (FLARED)

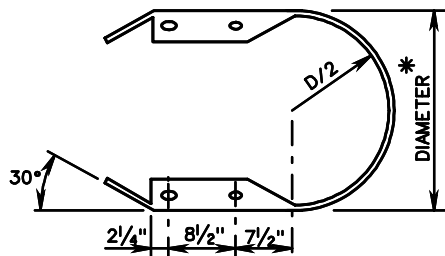


* THE GUARDRAIL MEDIAN BARRIER COMPONENTS DEPICTED IN A.R.T.B.A. TECHNICAL BULLETIN NUMBER 268B MAY BE SUBSTITUTED IF INTERCHANGEABLE WITH THE STANDARDS FOR GUARDRAIL (GR) OR MEDIAN BARRIER (MB) AND APPROVED BY THE ENGINEER.

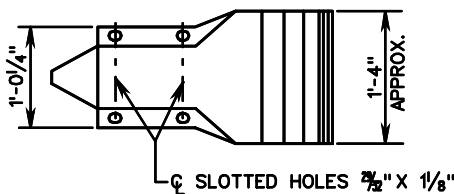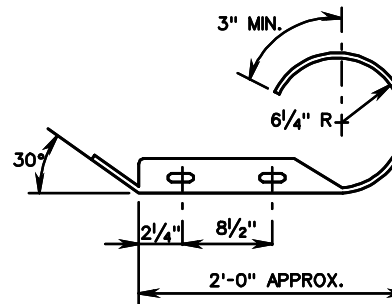


* STANDARD DIMENSIONS OF 12 1/2", 24" AND 30" ARE SUGGESTED.

W BEAM END SECTION (BUFFER)

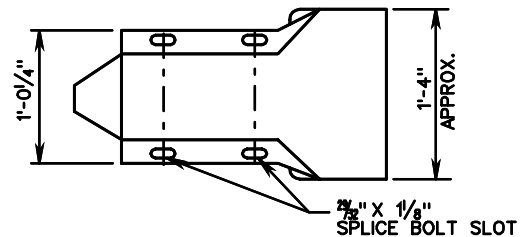


W BEAM END SECTION (ROUNDED)

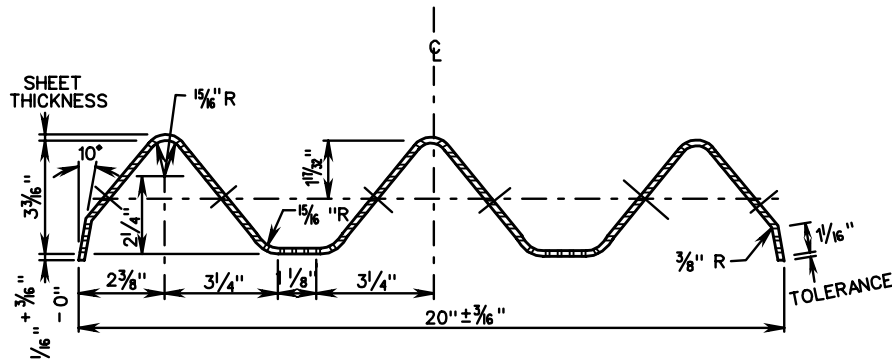


SECTION THRU THRIE BEAM RAIL ELEMENT

NOTES:


THE GUARDRAIL AND MEDIAN BARRIER COMPONENTS DEPICTED IN ARTBA TECHNICAL BULLETIN NUMBER 268B MAY BE SUBSTITUTED IF INTERCHANGEABLE WITH THE STANDARDS FOR GUARDRAIL (GR) OR MEDIAN BARRIER (MB) AND APPROVED BY THE ENGINEER.

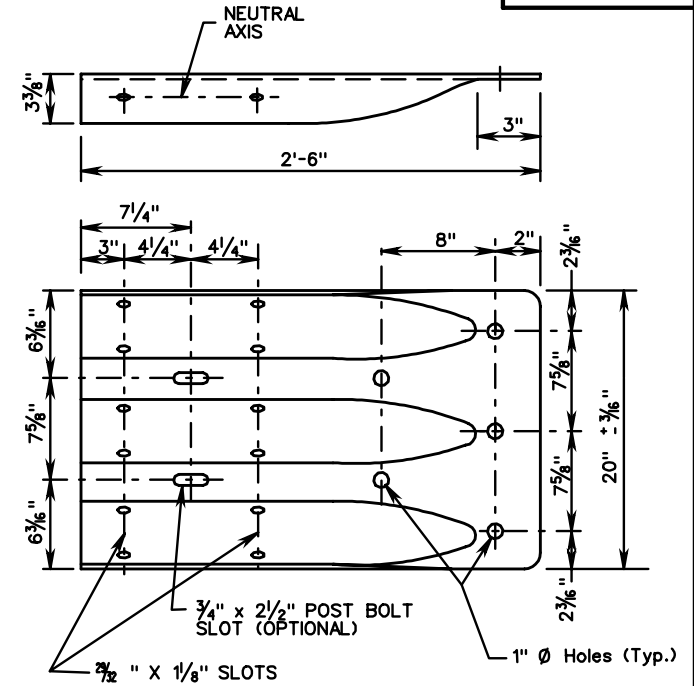

THRIE BEAM TERMINAL CONNECTOR DETAIL

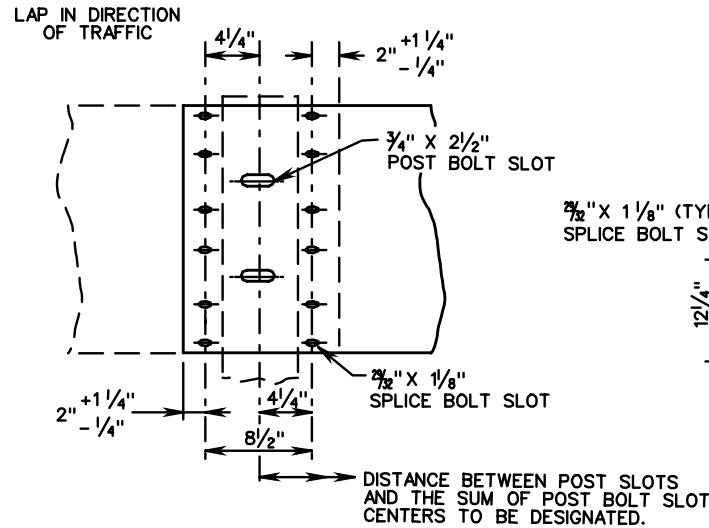

SPLICE DETAIL

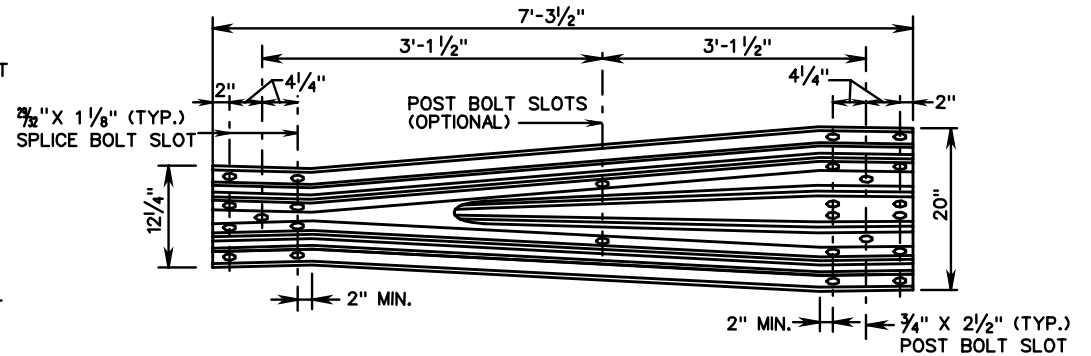

TRANSITION SECTION DETAIL
(W-BEAM TO THRIE BEAM)

SPECIFICATION REFERENCE

221
505

STANDARD GUARDRAIL HARDWARE
THRIE BEAM GUARDRAIL HARDWARE

VIRGINIA DEPARTMENT OF TRANSPORTATION


VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE


SHEET 3 OF 3

501.03

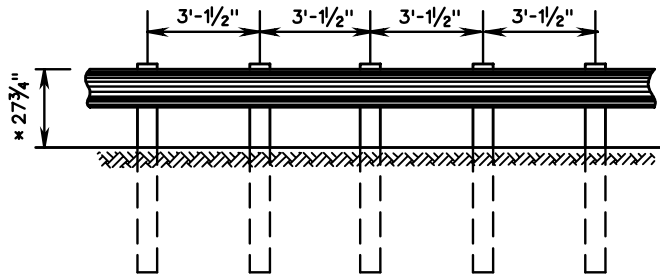

GR-2A


(3'-1/2" POST SPACING)
MAX DYNAMIC DEFLECTION - 2'

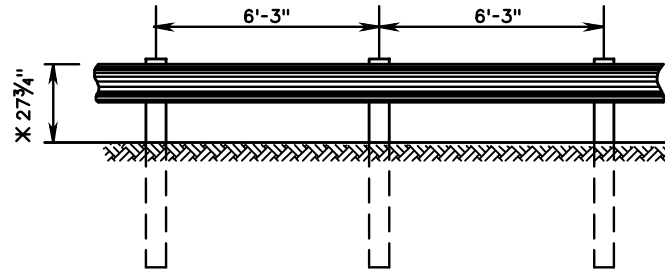

GR-2

(6'-3" POST SPACING)
MAX DYNAMIC DEFLECTION - 3'

* HEIGHT TOLERANCE $\pm 3/4"$

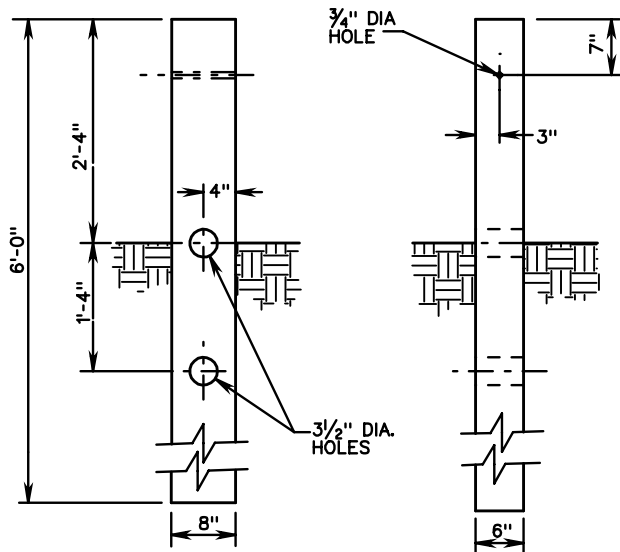

CRT POST

NOTES:

GUARDRAIL LOCATIONS SHOWN ON PLANS ARE APPROXIMATE ONLY AND CAN BE ADJUSTED DURING CONSTRUCTION IF AND AS DIRECTED BY THE ENGINEER.

FOR DETAILS OF POST AND BLOCKOUTS SEE SHEET NO. 501.05.

FOR DETAILS OF RAIL ELEMENT, RAIL SPLICE JOINT, W-BEAM BACK-UP PLATE, AND ASSOCIATED HARDWARE SEE SHEET NOS. 501.01 AND 501.02.

RAIL ELEMENTS ARE FURNISHED SHOP CURVED FOR RADIi BETWEEN 5 FEET AND 150 FEET.

ALL GUARDRAIL POSTS SHALL BE SET PLUMB. POST SHALL NOT BE SET WITH A VARIATION OF MORE THAN 1/8" PER FOOT FROM VERTICAL. W-BEAM, BLOCKOUTS, AND POSTS SHALL BE SET AND ALIGNED WITHOUT ALTERATION OR FORCE, AS PER SECTION 505 OF THE SPECIFICATIONS.

ALL GR-2 AND GR-2A RAIL SHALL BE MAINTAINED AT A HEIGHT OF 27 3/4" $\pm 3/4"$ TOLERANCE BASED OFF THE FINISHED GRADE CENTERLINE ELEVATION, PAVEMENT CROSS SLOPE, OR SHOULDER SLOPE.

ALL W-BEAM RAILS SHALL BE LAPPED IN THE DIRECTION OF VEHICULAR TRAVEL FOR THE FINISHED ROADWAY.



ROAD AND BRIDGE STANDARDS

STANDARD BLOCKED-OUT W-BEAM GUARDRAIL
(STRONG POST SYSTEM)

SPECIFICATION
REFERENCE






SHEET 1 OF 2

REVISION DATE

VIRGINIA DEPARTMENT OF TRANSPORTATION


501.04

221
505

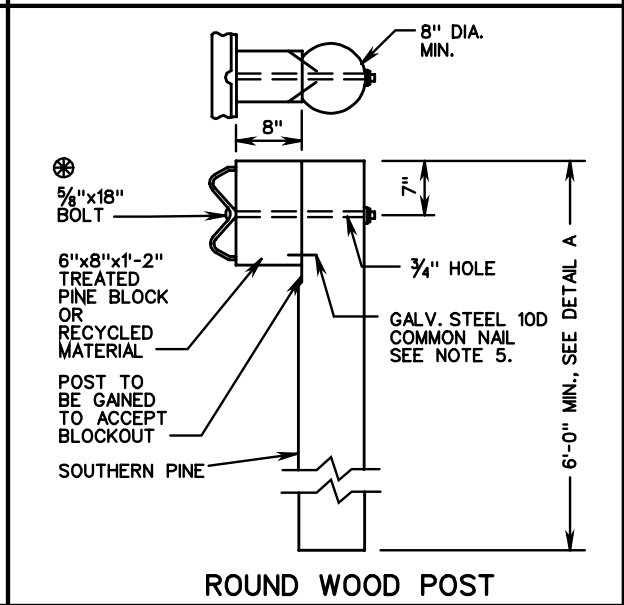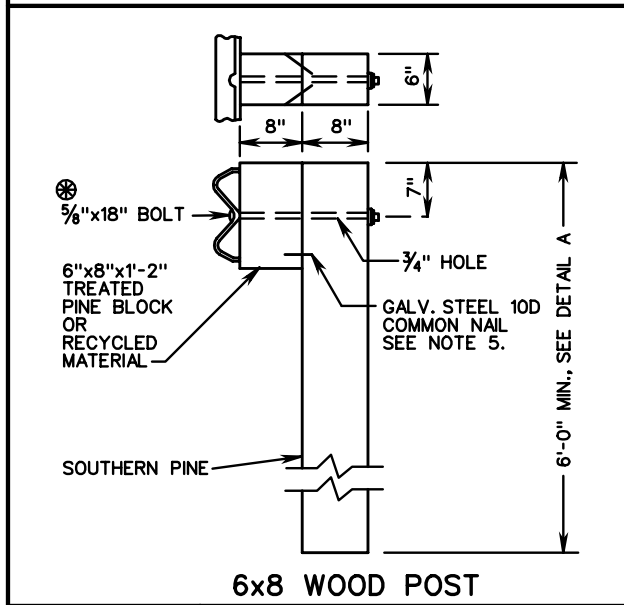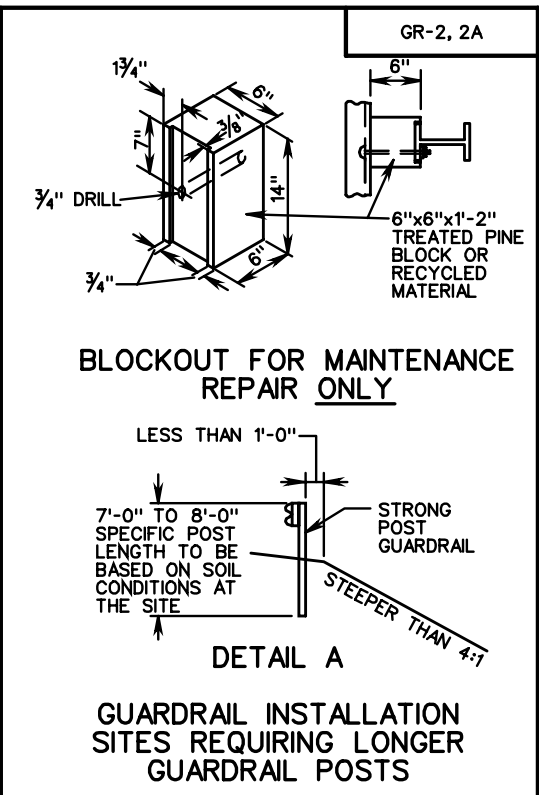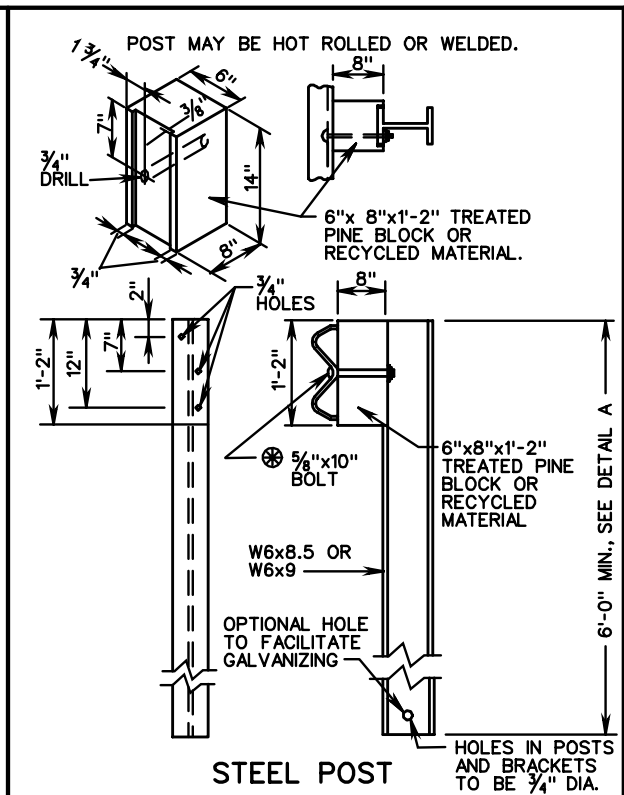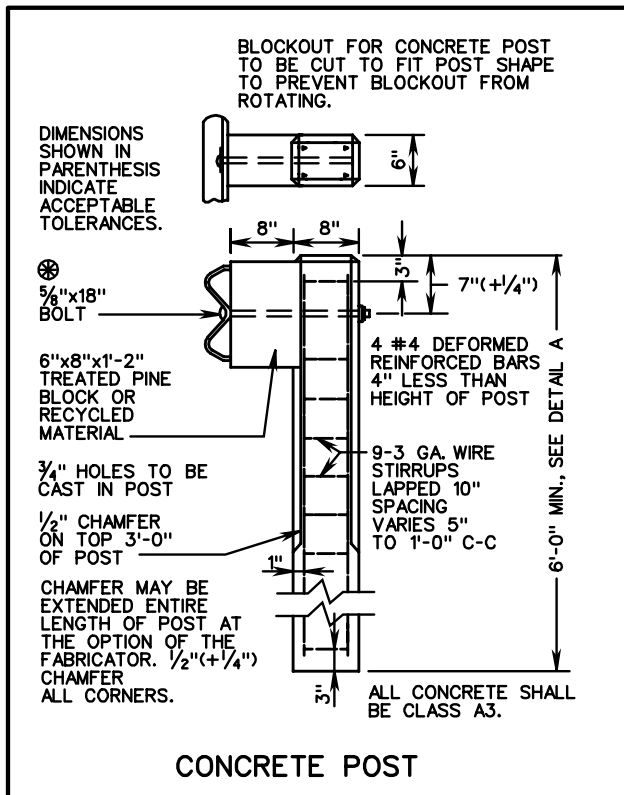

- NOTES:
1. ALL BOLTS, NUTS, WASHERS, AND OTHER STEEL ITEMS ARE TO BE GALVANIZED.
 2. ALTERNATE TYPE POSTS AND BLOCKOUT MAY BE INTERCHANGED ON ANY ONE PROJECT WITH THE RESTRICTION THAT THE SAME TYPE OF POST AND BLOCKOUT MUST BE USED IN ANY SINGLE RUN OF GUARDRAIL.
 3. FOR DETAILS OF GUARDRAIL ELEMENT SPLICE JOINT, HARDWARE, ETC. SEE SHEET NOS. 501.01 AND 501.02.
 4. THE GUARDRAIL AND MEDIAN BARRIER COMPONENTS DEPICTED IN A.R.T.B.A. TECHNICAL BULLETIN NUMBER 268B MAY BE SUBSTITUTED IF INTERCHANGEABLE WITH THE STANDARDS FOR GUARDRAIL (GR) OR MEDIAN BARRIER (MB) AND APPROVED BY THE ENGINEER.
 5. DRIVE NAIL ON BOTH SIDES WITHIN 2" OF THE TOP OR BOTTOM OF BLOCKOUT AFTER 5/8" x 18 BOLT IS INSTALLED.
- ⊗ STANDARD WASHER TO BE USED ON LAST 50' OF RUN-OFF END ONLY UNLESS A STANDARD GR-11 RUN-OFF TERMINAL TREATMENT IS USED.


SPECIFICATION REFERENCE	STANDARD BLOCKED-OUT W-BEAM GUARDRAIL (STRONG POST SYSTEM, POST AND BLOCKOUT DETAILS)	VDOT ROAD AND BRIDGE STANDARDS	
		VIRGINIA DEPARTMENT OF TRANSPORTATION	REVISION DATE SHEET 2 OF 2
221 236 505		501.05	

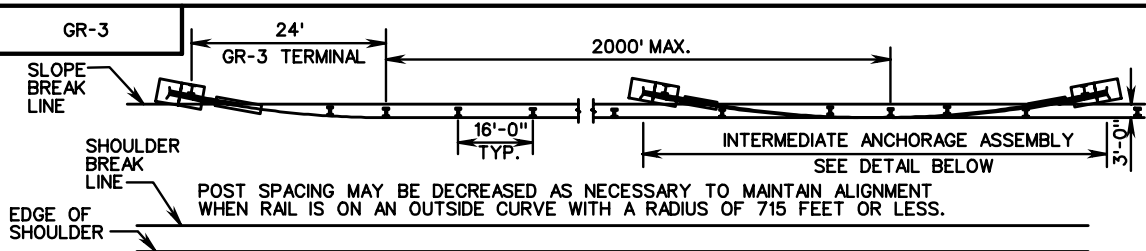


NOTES:

- FOR ARRANGEMENTS OF SPRING CABLE END ASSEMBLIES (COMPENSATING DEVICES) AND TURNBUCKLE CABLE END ASSEMBLIES, THE FOLLOWING CRITERIA SHALL APPLY:
- LENGTH OF CABLE RUNS:
 - TO 1000'-USE COMPENSATING DEVICE ON ONE END AND USE TURNBUCKLE ON THE OTHER END OF EACH INDIVIDUAL CABLE.
 - OVER 1000' TO 2000'-USE COMPENSATING DEVICE ON EACH END OF EACH INDIVIDUAL CABLE.
 - OVER 2000'-START NEW STRETCH BY INTERLACING AT LAST PARALLEL POST. SEE TYP. INSTALLATION.
- FITTINGS: ALL FITTINGS SHALL BE SO DESIGNED AND BE OF SUCH SECTION AS TO DEVELOP THE FULL STRENGTH OF A SINGLE CABLE OR CABLE ASSEMBLIES, AS THE CASE MAY BE.
 - SINGLE CABLE ANCHOR ASSEMBLY- MIN. TENSILE STRENGTH.....25,000 LBS.
 - THREE CABLE ANCHOR ASSEMBLY- MIN. TENSILE STRENGTH.....100,000 LBS.
 - ALL FITTINGS SHALL BE HOT DIPPED GALVANIZED.
- THE DYNAMIC DEFLECTION FOR STANDARD GR-3 IS 11 FEET.
- FOR ROCK INSTALLATION, 8"x24"x1/4" PLATE SHALL BE ELIMINATED. DRILL OR EXCAVATE HOLE FOR POST AND BACKFILL WITH CRUSHER RUN AGGREGATE TO LEVEL OF ROCK.
- 5/8" ANSIB18.2.2 HEX. BACKING NUT OR APPROVED SHOULDER MUST EQUAL BEARING AREA OF 5/16" STANDARD NUT.
- THE GUARDRAIL AND MEDIAN BARRIER COMPONENTS DEPICTED IN AASHTO-AGC-ARTBA "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE" MAY BE SUBSTITUTED IF INTERCHANGEABLE WITH THE STANDARDS FOR GUARDRAIL (GR) OR MEDIAN BARRIER (MB) AND APPROVED BY THE ENGINEER.


TYPICAL INSTALLATION

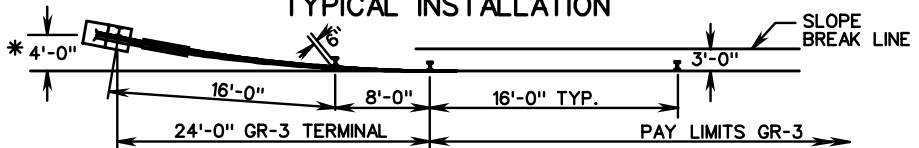


GUARDRAIL TERMINAL PLAN VIEW




ELEVATION

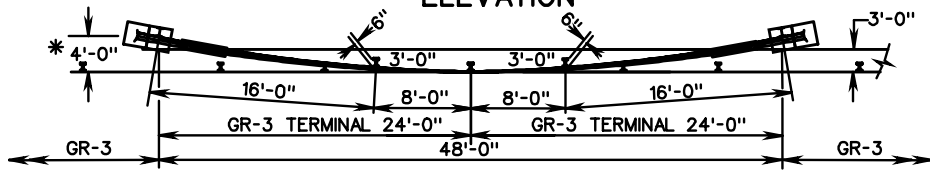

INTERMEDIATE ANCHORAGE PLAN VIEW




ELEVATION

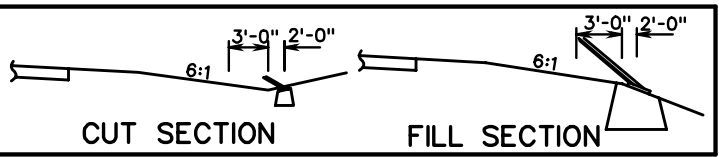

* WHEN BURYING GR-3 CABLE GUARDRAIL IN THE BACKSLOPE, THE CONCRETE ANCHOR ASSEMBLY MUST BE PLACED AT A HEIGHT ON THE BACKSLOPE TO MAINTAIN THE 27" MIN./28" MAX. CABLE HEIGHT AT THE ANCHORAGE.

CUT SECTION

FILL SECTION

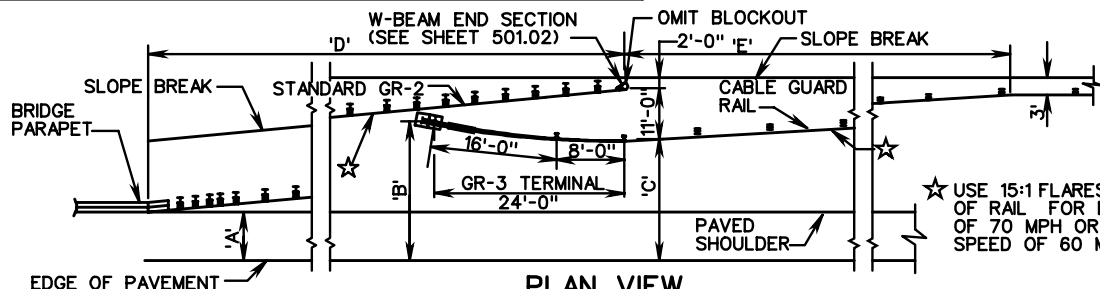

METHOD OF TRANSITION FROM CABLE GUARDRAIL TO W-BEAM GUARDRAIL AT BRIDGE APPROACHES

RECOVERABLE AREA WIDTH	LT. OR RT. OF C	70 MPH D.S.				
		A	B	C	D	E
24'	12'	27'	26'	375'	150'	
24'	6'	27'	26'	465'	150'	
21'	12'	24'	23'	330'	150'	
21'	6'	24'	23'	420'	150'	

☆ USE 15:1 FLARES ON BOTH TYPES OF RAIL FOR DESIGN SPEED OF 70 MPH OR 13:1 FOR DESIGN SPEED OF 60 MPH OR LESS.

VDOT
ROAD AND BRIDGE STANDARDS

SHEET 1 OF 3 REVISION DATE








501.06

CABLE GUARDRAIL


VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

221
505

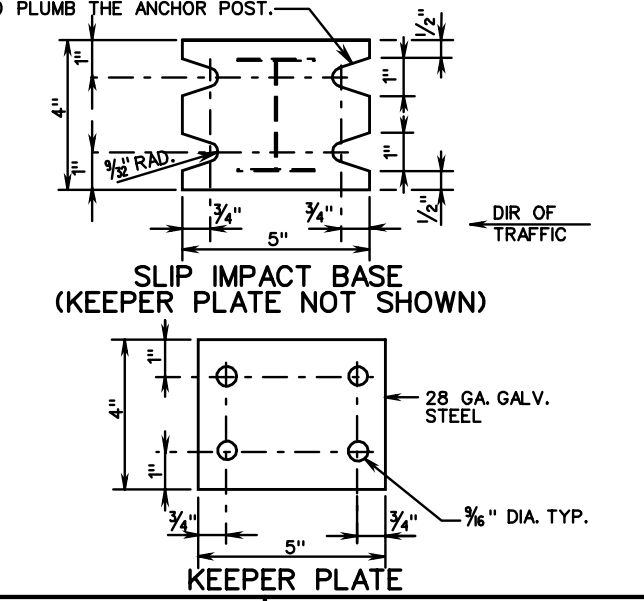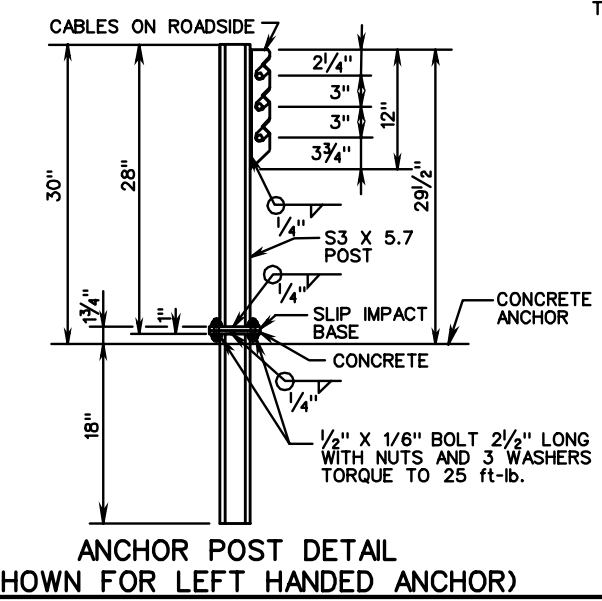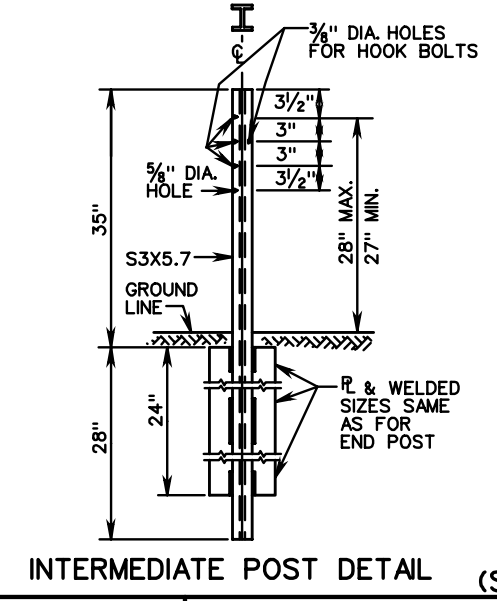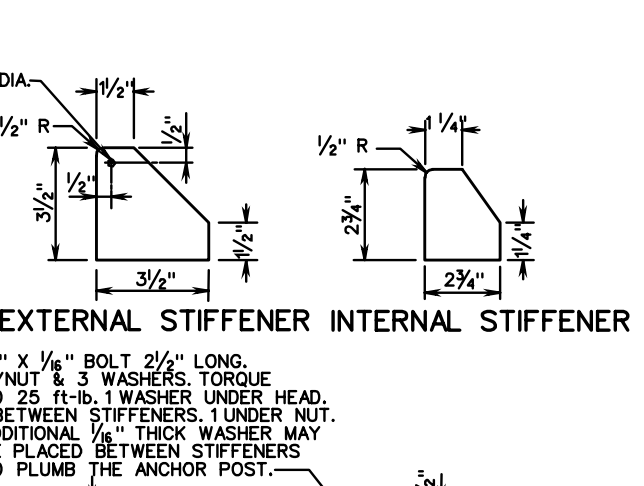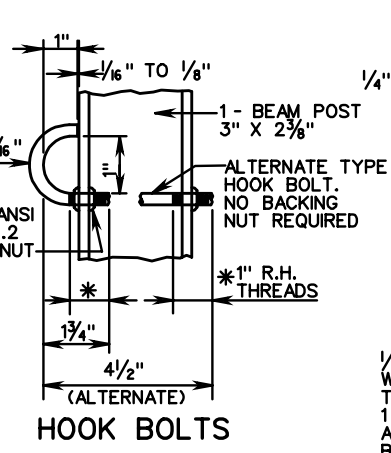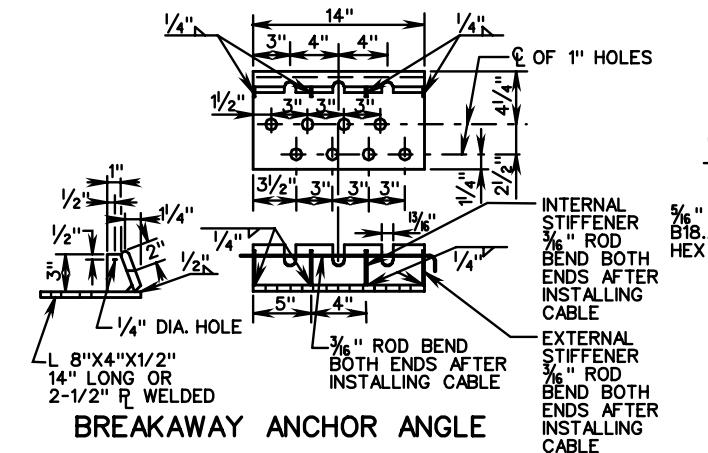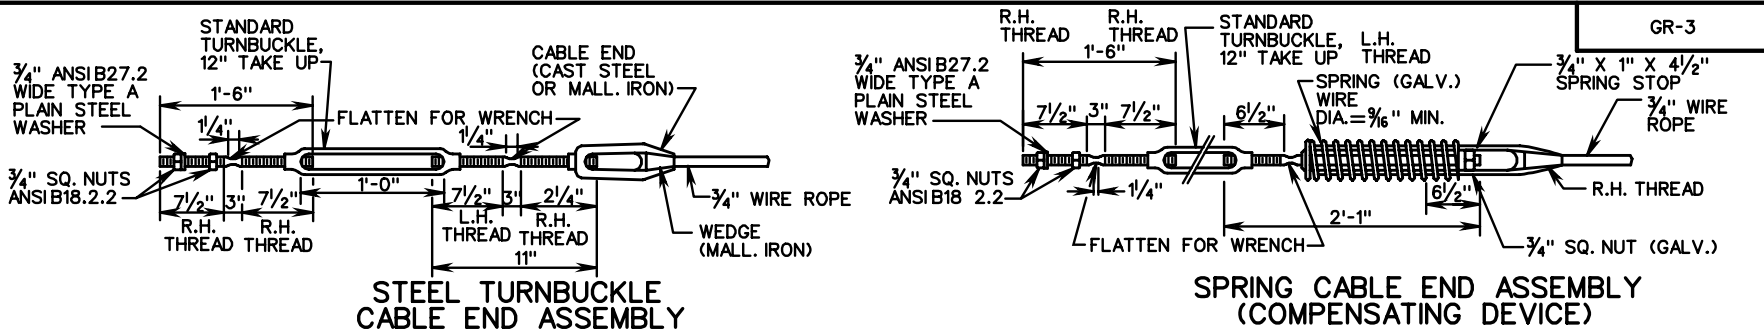

SPECIFICATION REFERENCE		CABLE GUARDRAIL		VDOT ROAD AND BRIDGE STANDARDS	
221 505					
VIRGINIA DEPARTMENT OF TRANSPORTATION		REVISION DATE	SHEET 2 OF 3		501.07

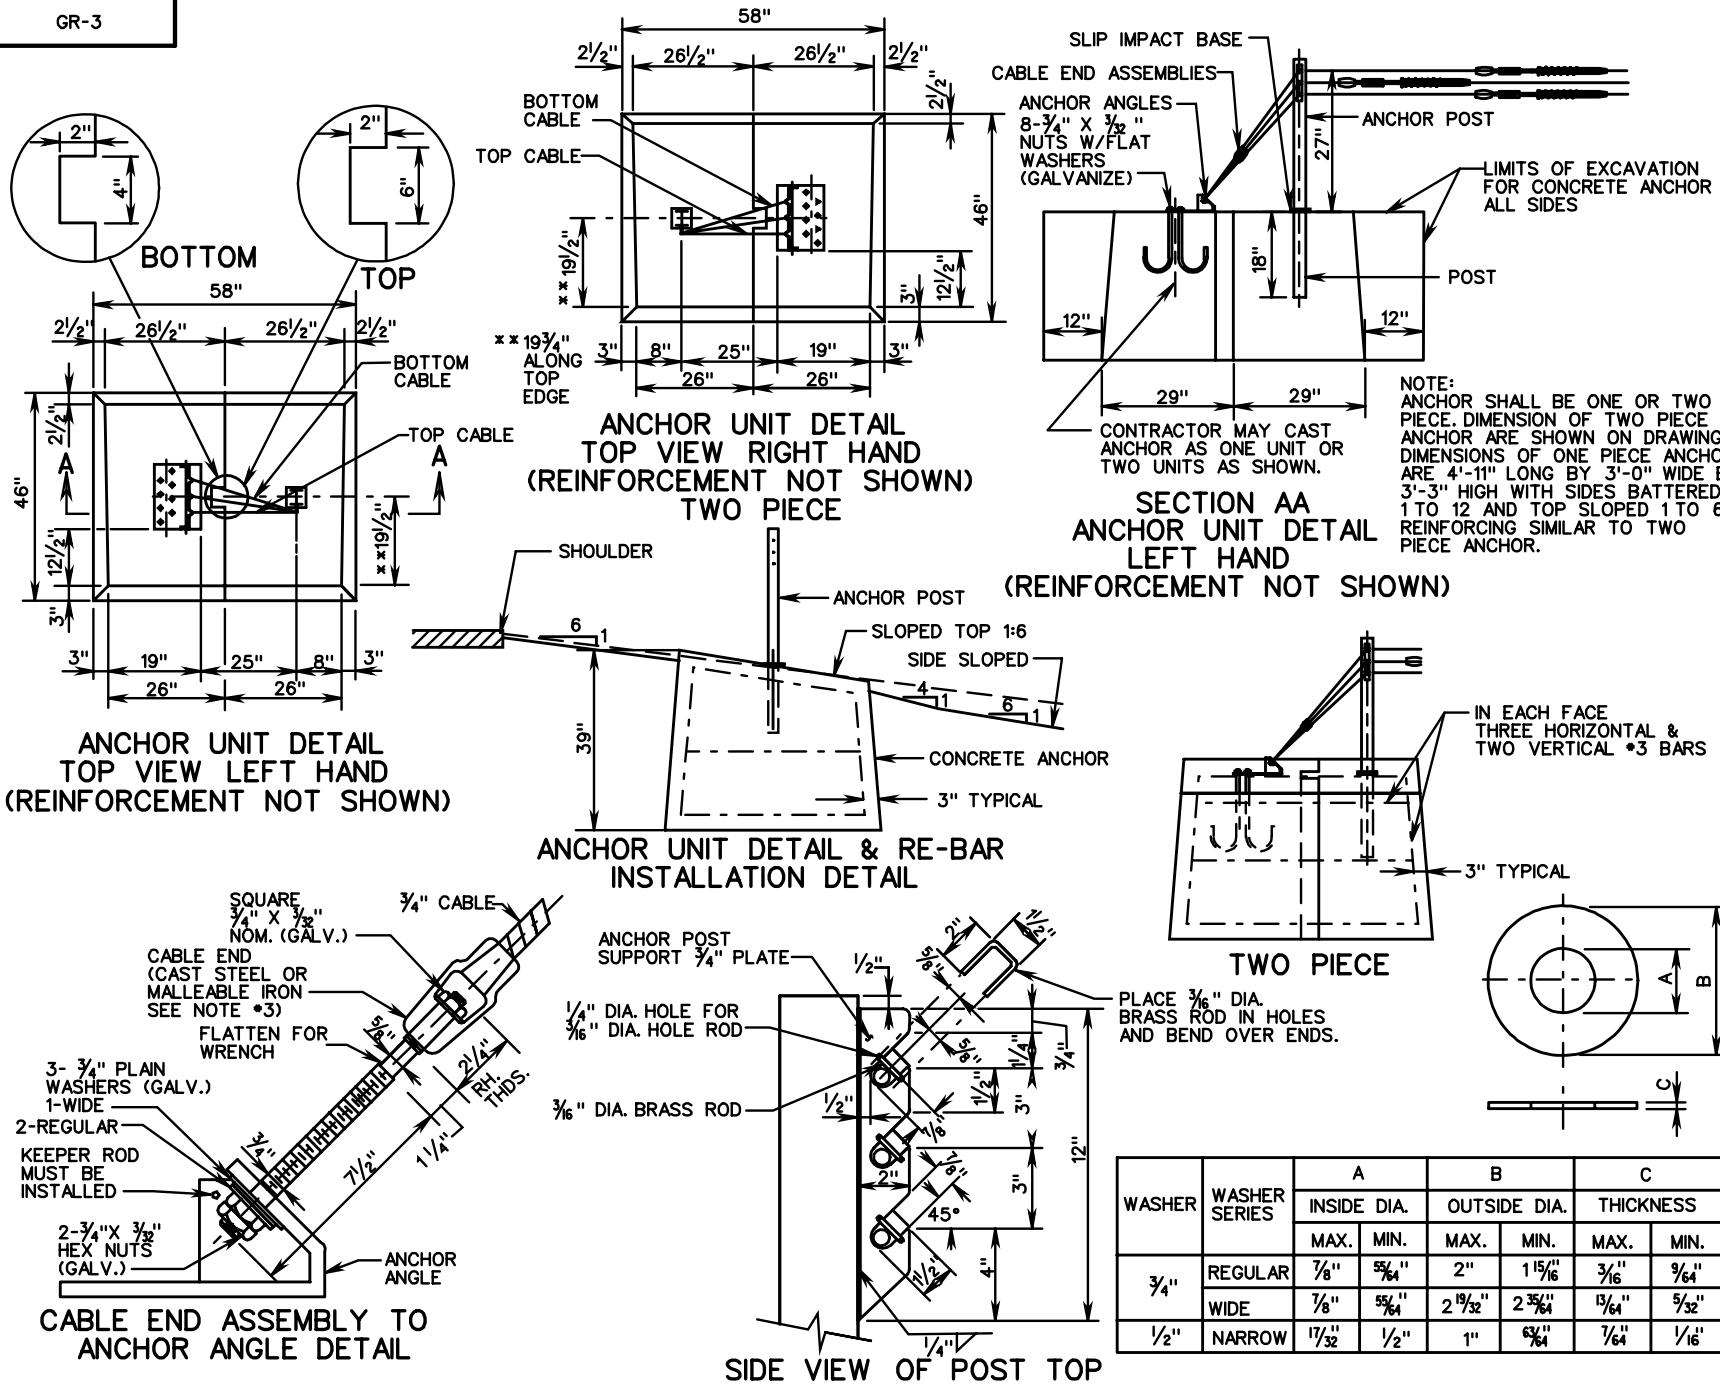

CABLE GUARDRAIL

VIRGINIA DEPARTMENT OF TRANSPORTATION



SPECIFICATION REFERENCE

221
505

VDOT
ROAD AND BRIDGE STANDARDS


SHEET 3 OF 3 REVISION DATE

501.08

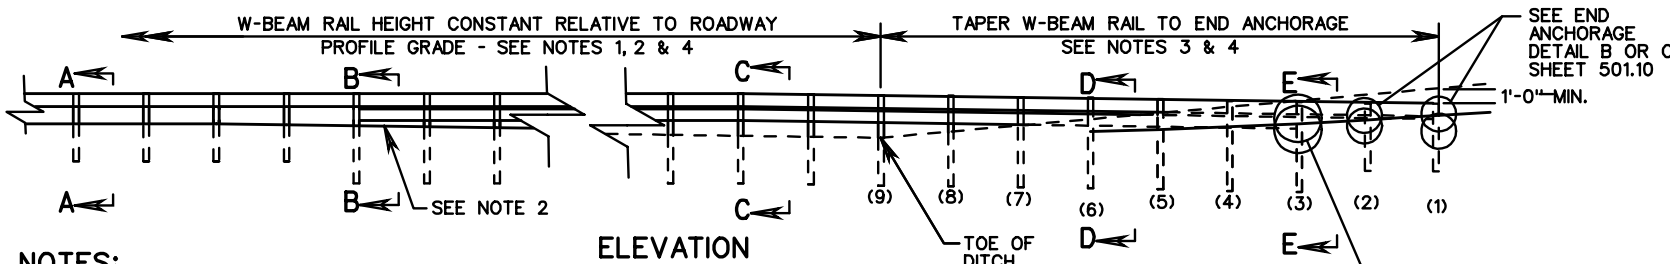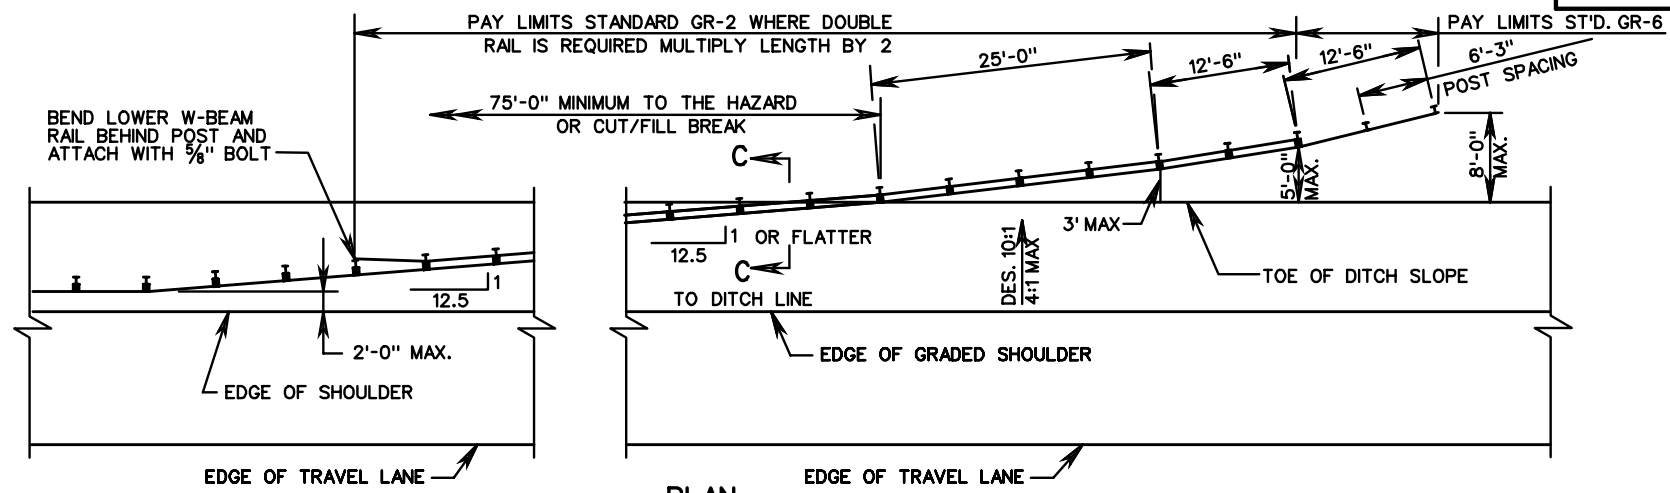

NOTES:

1. A SECOND RAIL IS REQ'D. WHERE THE DISTANCE BETWEEN THE GROUND AND BOTTOM OF THE TOP RAIL EXCEEDS 18" (UP TO THE POINT WHERE THE RAIL CROSSES THE DITCH LINE). THE DOUBLE RAIL WILL EXTEND TO POST #4.
2. MAXIMUM DISTANCE BETWEEN BOTTOM OF THE LOWER W-BEAM RAIL AND GROUND LINE IS 18". WHEN DOUBLE RAIL IS REQ'D., TAPER BOTH W-BEAM RAILS TO MAINTAIN THE 18" DISTANCE FROM THE GROUND.
3. BOTH W-BEAM RAILS TO BE 1'-0" BELOW FINISHED GRADE AT POST #1 (8'-0" OFFSET).
4. A 8'-0" LONG POST MUST BE USED WHEN UPPER AND LOWER W-BEAM RAILS ARE REQUIRED. FROM THE BEGINNING OF THE LOWER RAIL THROUGH POST #3.
5. STANDARD GR-6 TERMINAL TREATMENT MAY BE USED AT THE RUN-ON END OF DIVIDED HIGHWAYS (LEFT AND RIGHT OF TRAFFIC) AND AT THE RUN-ON AND RUN-OFF ENDS ON UNDIVIDED HIGHWAYS.
6. ALL POST SPACING 6'-3" C-C UNLESS OTHERWISE NOTED. THE POST MAY BE W6 X 8.5 STEEL OR 6 X 8 WOOD EXCEPT THE LAST 3 TERMINAL POSTS MUST BE W6 X 8.5 STEEL.
7. FOR SECTIONS D-D & E-E, AND END ANCHORAGE DETAILS SEE SHEET 501.10.
8. ALL TERMINAL RUN-ON OR RUN-OFF MUST BE INSTALLED WITH LAPPING THE RAILS IN THE DIRECTION THAT THE TERMINALS WERE INSTALLED WHEN TESTED TO NCHRP 350 REQUIREMENTS.
9. IF THE BACKSLOPE IS ROCK AND 1:1 OR STEEPER, THE W-BEAM MAY BE ANCHORED PER SOLID ROCK CUT INSTALLATION (DETAIL F).






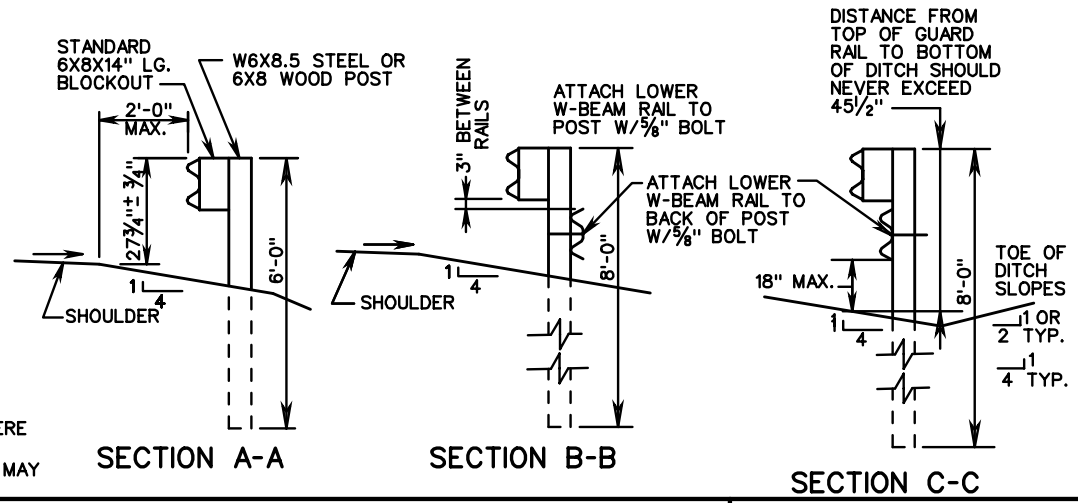


SPECIFICATION REFERENCE
221 505

TERMINAL TREATMENT FOR W-BEAM GUARDRAIL



VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 2
	501.09

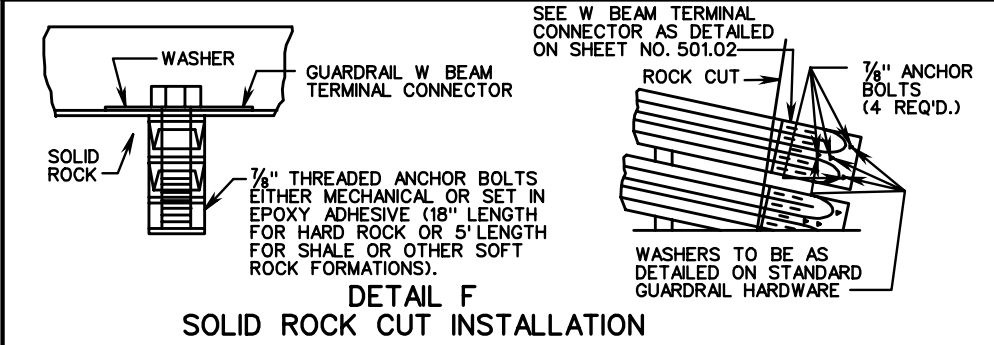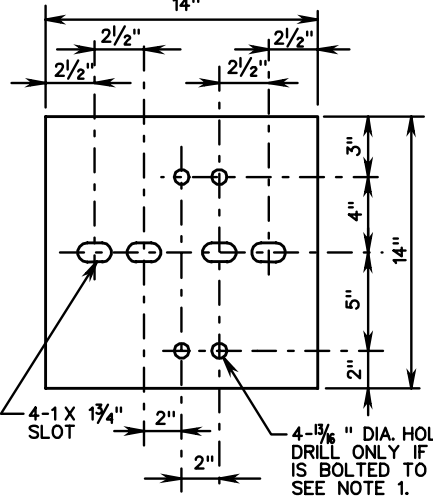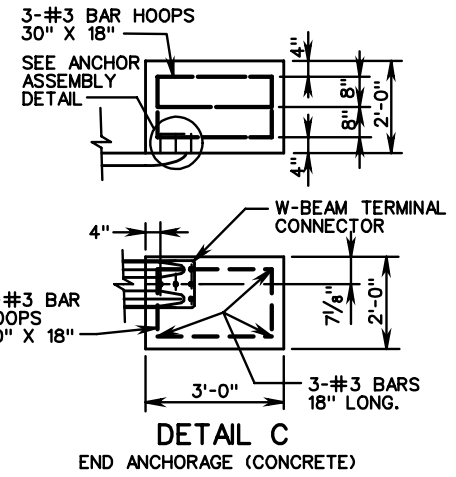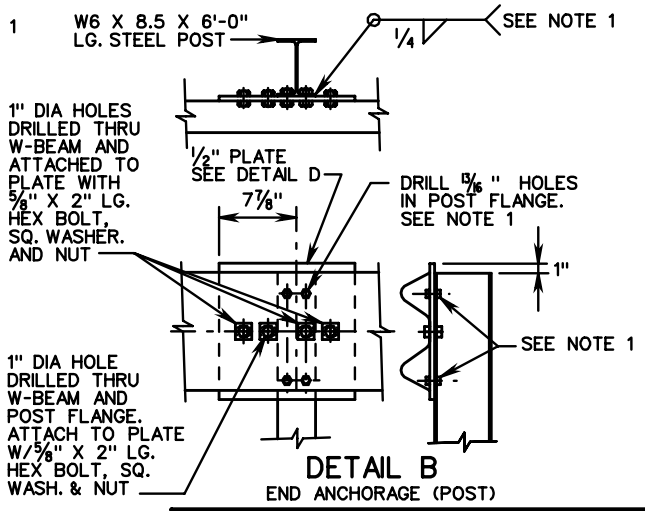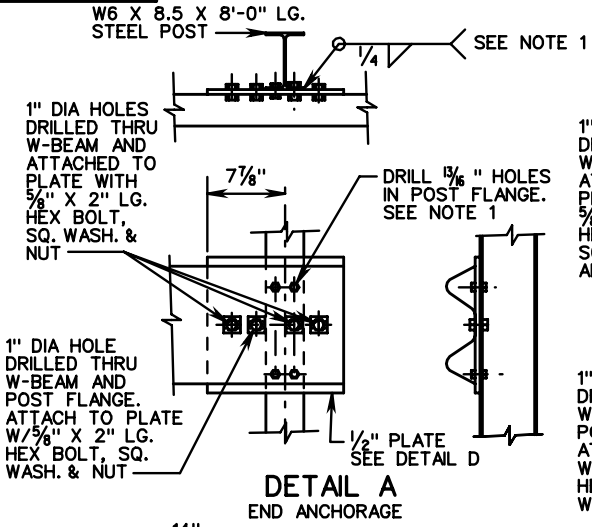

NOTE:


- 1/2" STEEL PLATE MAY BE WELDED OR BOLTED TO POST. IF PLATE IS BOLTED TO POST USE 4 - 5/8" X 1 1/2" LG. HEX HEAD BOLTS W/ HEX NUTS. IF PLATE IS WELDED TO POST DO NOT DRILL 1 5/8" HOLES IN PLATE OR IN POST FLANGES.
- CONCRETE END ANCHORAGE MAY BE USED IN PLACE OF STEEL POST AT 8'-0" OFFSET.

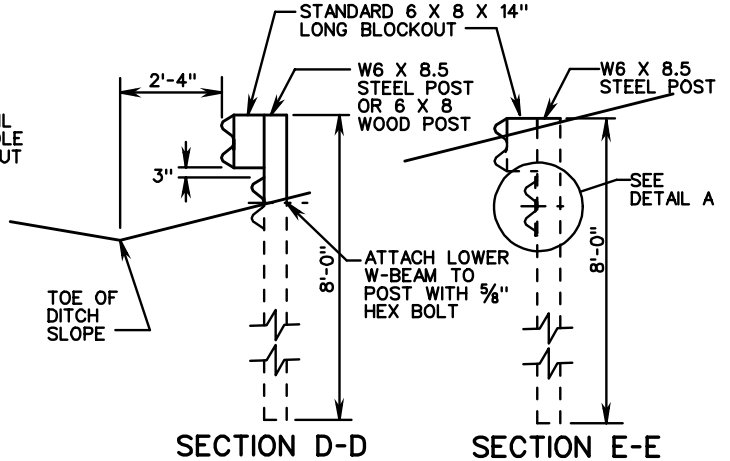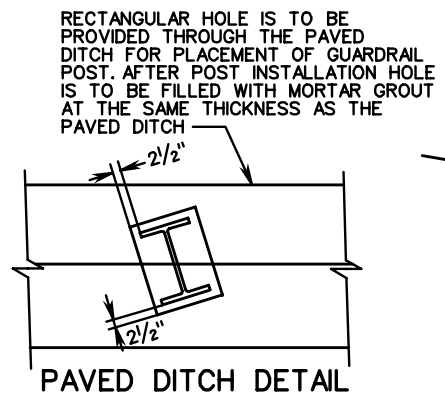

TERMINAL TREATMENT FOR W-BEAM GUARDRAIL

NOTES:

1. GUARDRAIL TERMINAL, STD. GR-7 IS TO BE SRT 350 (SIMILAR TO AS SHOWN) MANUFACTURED BY TRINITY INDUSTRIES, THE FLEAT 350 MANUFACTURED BY ROAD SYSTEMS, INC., OR OTHER VDOT APPROVED EQUAL MEETING NCHRP 350 TESTING CRITERIA.
2. ALL TERMINALS SHALL BE INSTALLED ACCORDING TO THE MANUFACTURER'S INSTALLATION INSTRUCTIONS AND THE FOLLOWING VDOT REQUIREMENTS:
 - A. ALL STANDARD GR-7 TERMINALS SHALL BE INSTALLED WITH A 4 FT. OFFSET.
 - B. YELLOW 8" X 36" REFLECTIVE SHEETING, IN ACCORDANCE WITH VDOT SPECIFICATIONS, SHOULD BE APPLIED IN TERMINALS EMPLOYING W-BEAM END SECTIONS. FOR TERMINALS EMPLOYING IMPACT (EXTRUDER) HEADS, AMBER (YELLOW) REFLECTIVE SHEETING WITH BLACK DIAGONAL STRIPES SHOULD BE APPLIED TO THE FULL AREA INSIDE THE IMPACT HEAD WITH THE DIRECTION OF THE BLACK DIAGONAL STRIPES CONFORMING TO CURRENT MUTCD APPLICATION FOR TYPE 3 OBJECT MARKERS (OM-3).
 - C. DO NOT CHANGE THE LAPPING OF TERMINAL FOR ANY INSTALLATIONS; INSTALL AS TESTED.
3. IF YOU CANNOT GET THE NECESSARY CLEAR RUNOUT AREA FOR THE GR-7 TERMINAL, CONSIDER ALTERNATIVE TERMINAL OPTIONS.
4. THIS DRAWING IS REPRESENTATIONAL ONLY. DETAILS, DIMENSIONS, QUANTITIES, AND OTHER INFORMATION NOT SHOWN WILL VARY FOR EACH MANUFACTURER. SEE INDIVIDUAL MANUFACTURER'S PLANS FOR THIS INFORMATION.

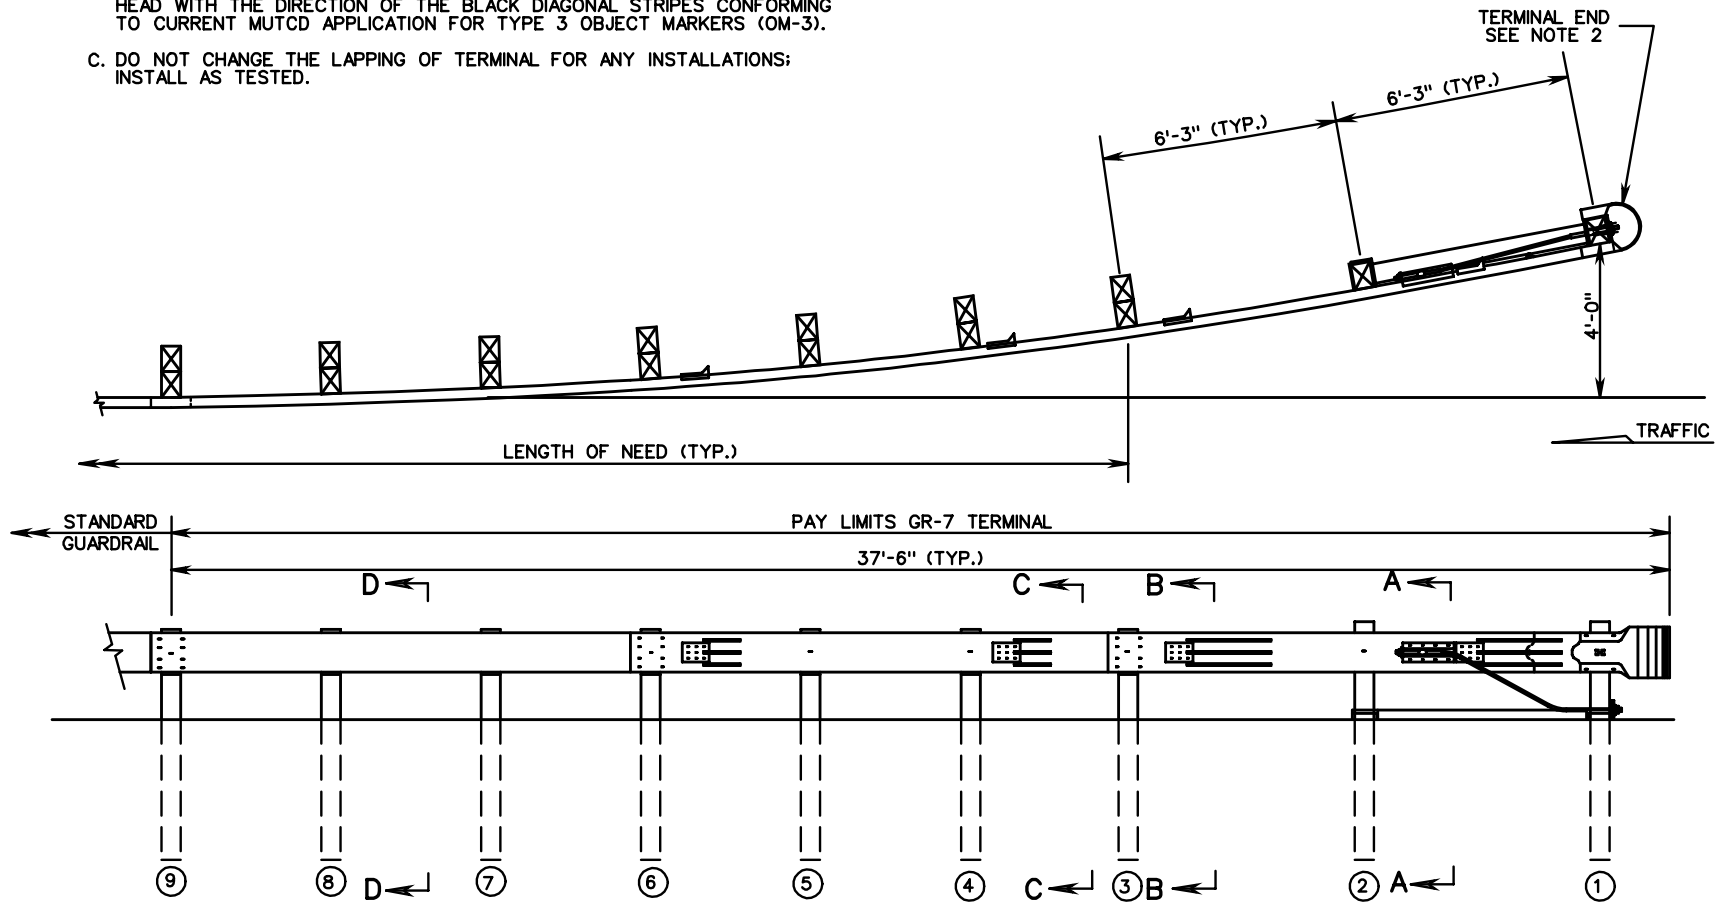


SPECIFICATION REFERENCE
221 505


BREAKAWAY CABLE TERMINAL (4' FLARE)

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 3
501.11	

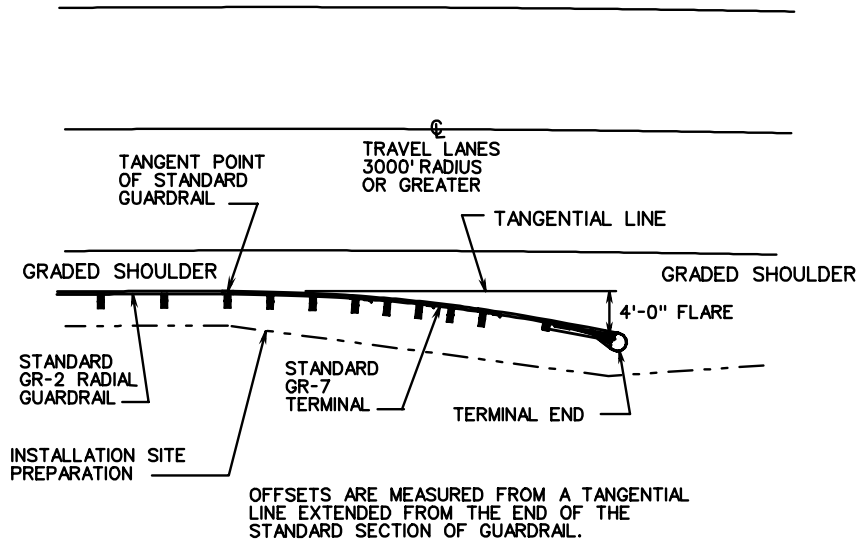

FLARED TERMINAL PLACEMENT
3000 FT. RADIUS OR GREATER

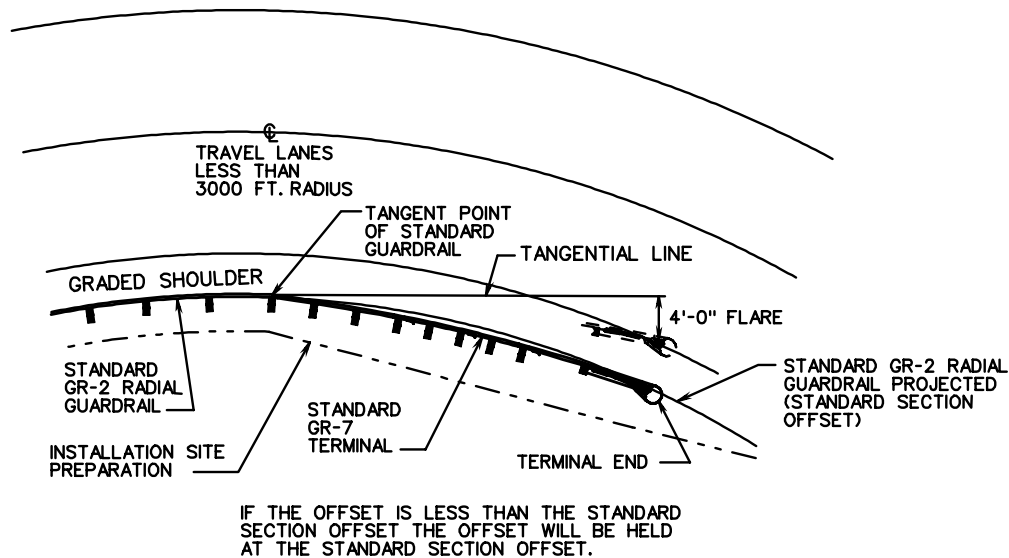

FLARED TERMINAL PLACEMENT ON
INSIDE OF CURVE - LESS THAN
3000 FT. RADIUS



ROAD AND BRIDGE STANDARDS

SHEET 2 OF 3

REVISION DATE



501.12

BREAKAWAY CABLE TERMINAL (4' FLARE)

VIRGINIA DEPARTMENT OF TRANSPORTATION


SPECIFICATION
REFERENCE

221
505

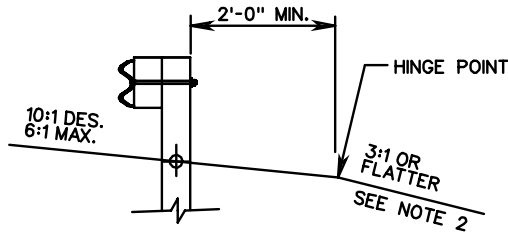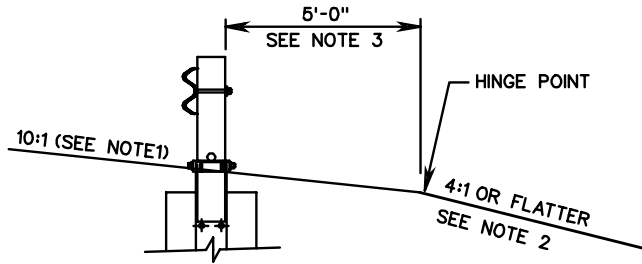

NOTES:

1. THE CROSS SLOPE OF THE GRADE APPROACHING THE GUARDRAIL TERMINAL AND ADJACENT TO FOR ITS FULL LENGTH, MUST BE 10:1. IF THE EXISTING GRADE IS FLAT OR IS A POSITIVE SLOPE DUE TO THE SUPERELEVATION OF THE ROADWAY PAVEMENT, THE MIN. OFFSET FROM BEHIND THE POST TO THE HINGE POINT, AS SHOWN, IS REQUIRED.
2. THE AREA IMMEDIATELY BEHIND AND BEYOND THE TERMINAL SHOULD BE TRAVERSABLE (3:1 OR FLATTER) AND FREE FROM FIXED OBJECTS. IF A CLEAR RUN OUT IS NOT ATTAINABLE THIS AREA SHOULD AT LEAST BE SIMILAR IN CHARACTER TO THE UPSTREAM UN-SHIELDED ROADSIDE AREAS.
3. FOR NEW CONSTRUCTION, RECONSTRUCTION, AND 3R WORK THE 10:1 SLOPE GRADING MUST EXTEND A MINIMUM OF 5'-0" BEHIND THE END POST.
4. FOR PROPRIETARY GUARDRAIL TERMINALS THE MANUFACTURER'S SITE PREPARATION REQUIREMENTS TAKE PRECEDENCE OVER THIS STANDARD.

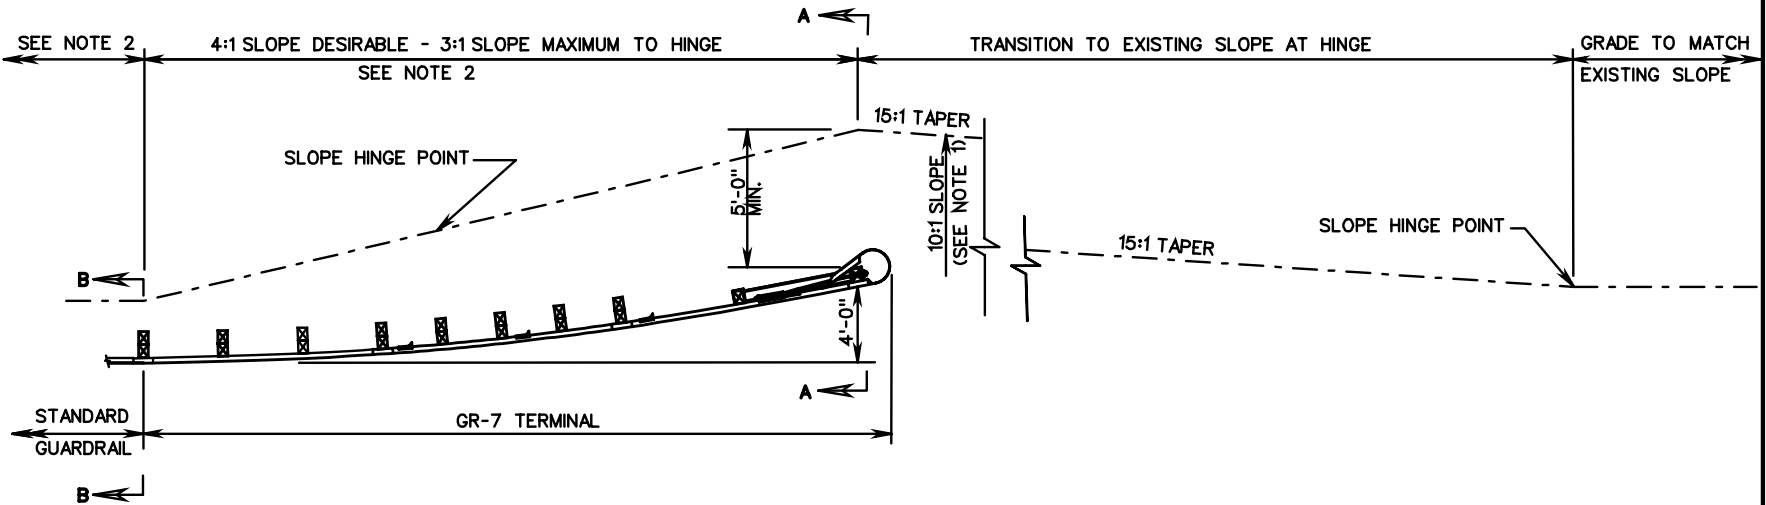

SPECIFICATION REFERENCE

221
505

GUARDRAIL TERMINAL INSTALLATION SITE PREPARATION REQUIREMENTS FOR GR-7

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT


ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 3 OF 3

501.13

GR-8,8A,8B,8C

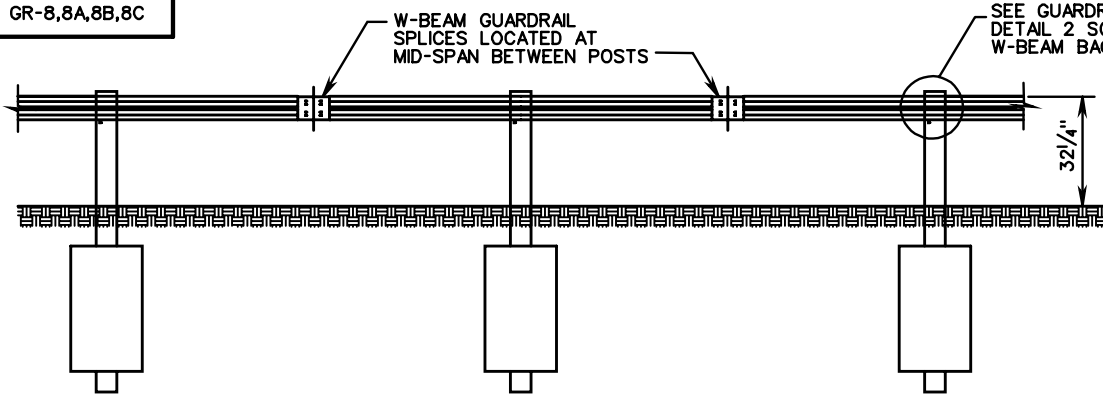

TYPICAL INSTALLATION


STANDARD	POST SPACING	DEFLECTION
GR-8	12' - 6"	7' - 0"
GR-8A	6' - 3"	5' - 0"
GR-8B	3' - 1/2"	4' - 0"
GR-8C	4' - 2"	4' - 6"

FOR ROCK INSTALLATION, 8" X 24" X 1/4" PLATE IS TO BE ELIMINATED. DRILL OR EXCAVATE HOLE FOR POST, PLACE POST AND BACKFILL WITH CRUSHER RUN AGGREGATE TO LEVEL OF ROCK.


ALL POSTS, BOLTS, NUTS AND WASHERS ARE TO BE GALVANIZED.

FOR DETAILS OF GUARDRAIL ELEMENT, SPLICE JOINT, HARDWARE, ETC. SEE SHEET NO. 501.01.

⊗ THE GUARDRAIL AND MEDIAN BARRIER COMPONENTS DEPICTED IN A.R.T.B.A. TECHNICAL BULLETIN NUMBER 268B MAY BE SUBSTITUTED IF INTERCHANGEABLE WITH THE STANDARDS FOR GUARDRAIL (GR) OR MEDIAN BARRIER (MB) AND APPROVED BY THE ENGINEER.

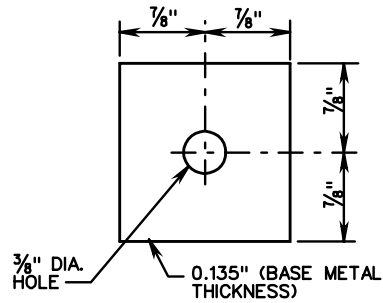


SQUARE WASHER

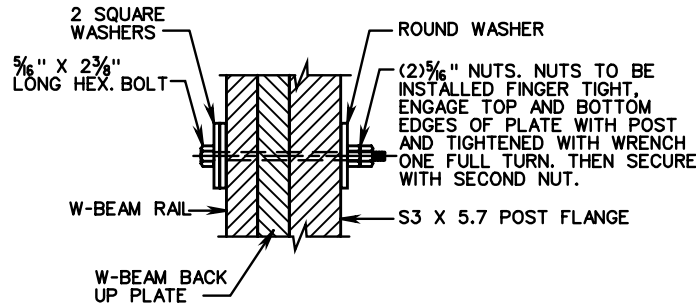


GUARDRAIL POST CONNECTION DETAIL

POST SPACING ON CURVES	
PAVEMENT ϕ RADIUS	POST SPACING
> 220 FT. R	12' - 6"
219 FT. - 111 FT.	6' - 3"
110 FT. - 76 FT.	4' - 2"
75 FT. - 50 FT.	3' - 1/2"
< 50 FT.	USE NOT RECOMMENDED

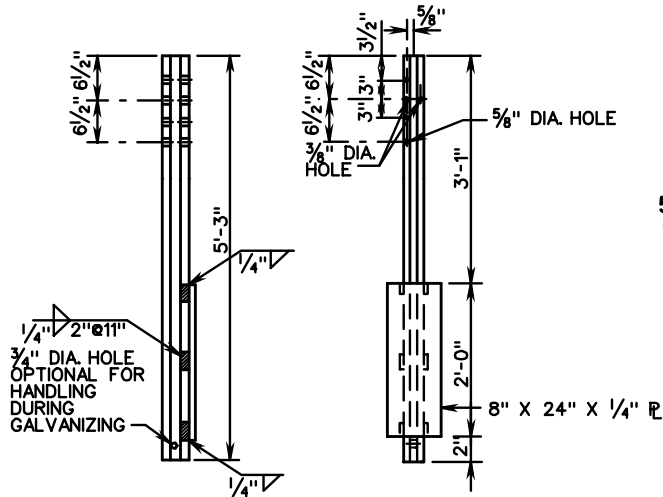


S 3 X 5.7 STEEL POST



5/16" HEX BOLT AND NUT

BOLT AND NUT SHALL HAVE 4000 POUNDS MIN. TENSILE STRENGTH

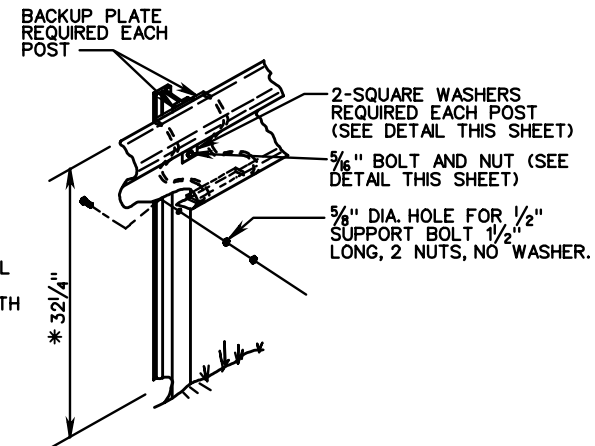

TYPICAL INSTALLATION

* HEIGHT TOLERANCE \pm 3/4"



ROAD AND BRIDGE STANDARDS

STANDARD W-BEAM GUARDRAIL (WEAK POST SYSTEM)

SPECIFICATION REFERENCE

SHEET 1 OF 2







REVISION DATE

TL-3 (>45 MPH)

221
505

501.14


VIRGINIA DEPARTMENT OF TRANSPORTATION

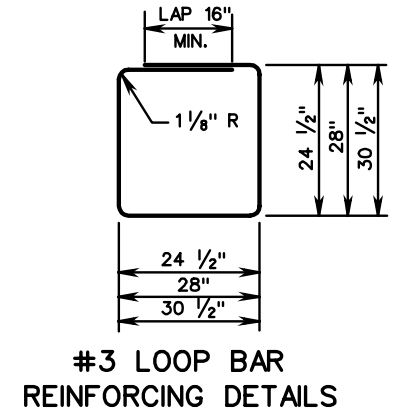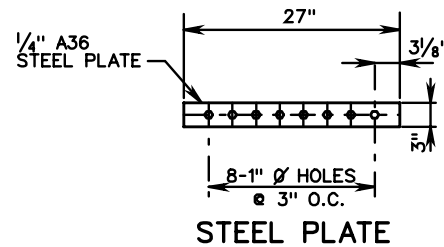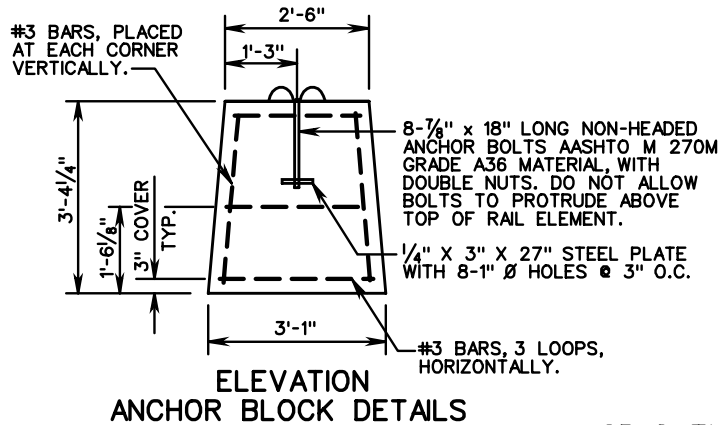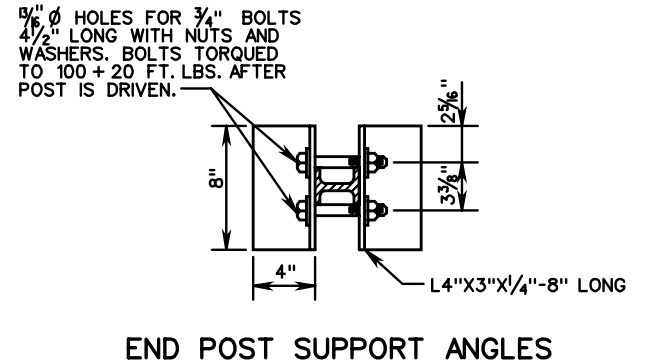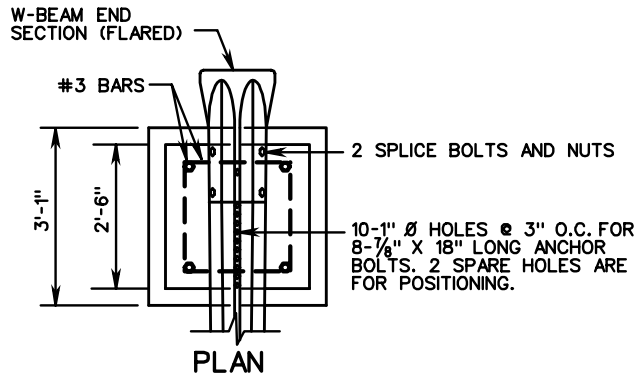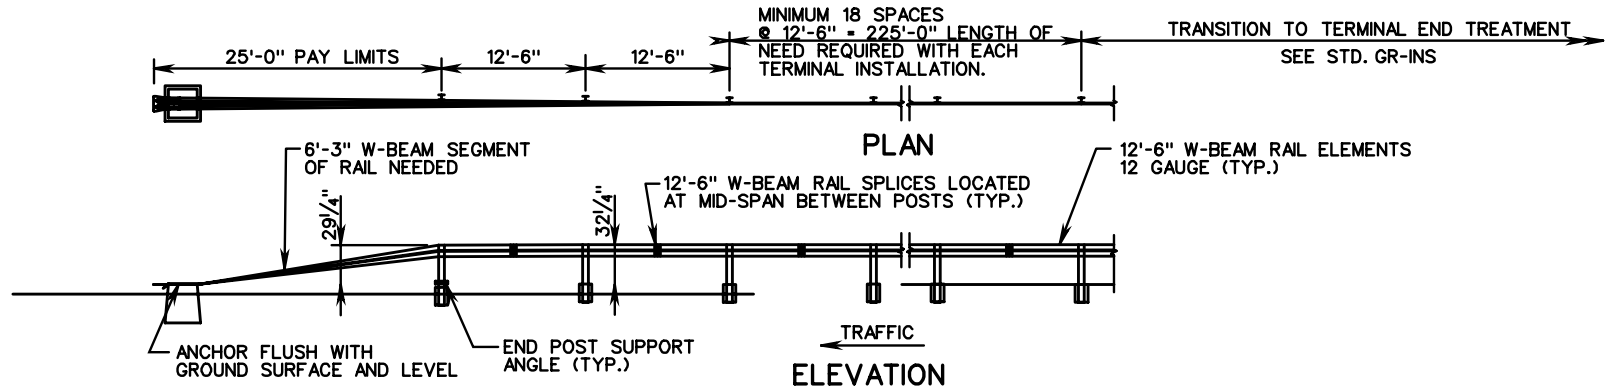

GR-8 TYPE II TERMINAL TREATMENT (RUN-OFF ANCHORAGE)

SPECIFICATION REFERENCE	221 505	STANDARD W-BEAM GUARDRAIL (WEAK POST SYSTEM) TL-3 (>45 MPH)	VDOT	
			ROAD AND BRIDGE STANDARDS	
		VIRGINIA DEPARTMENT OF TRANSPORTATION	REVISION DATE	SHEET 2 OF 2
				501.15

GR-9

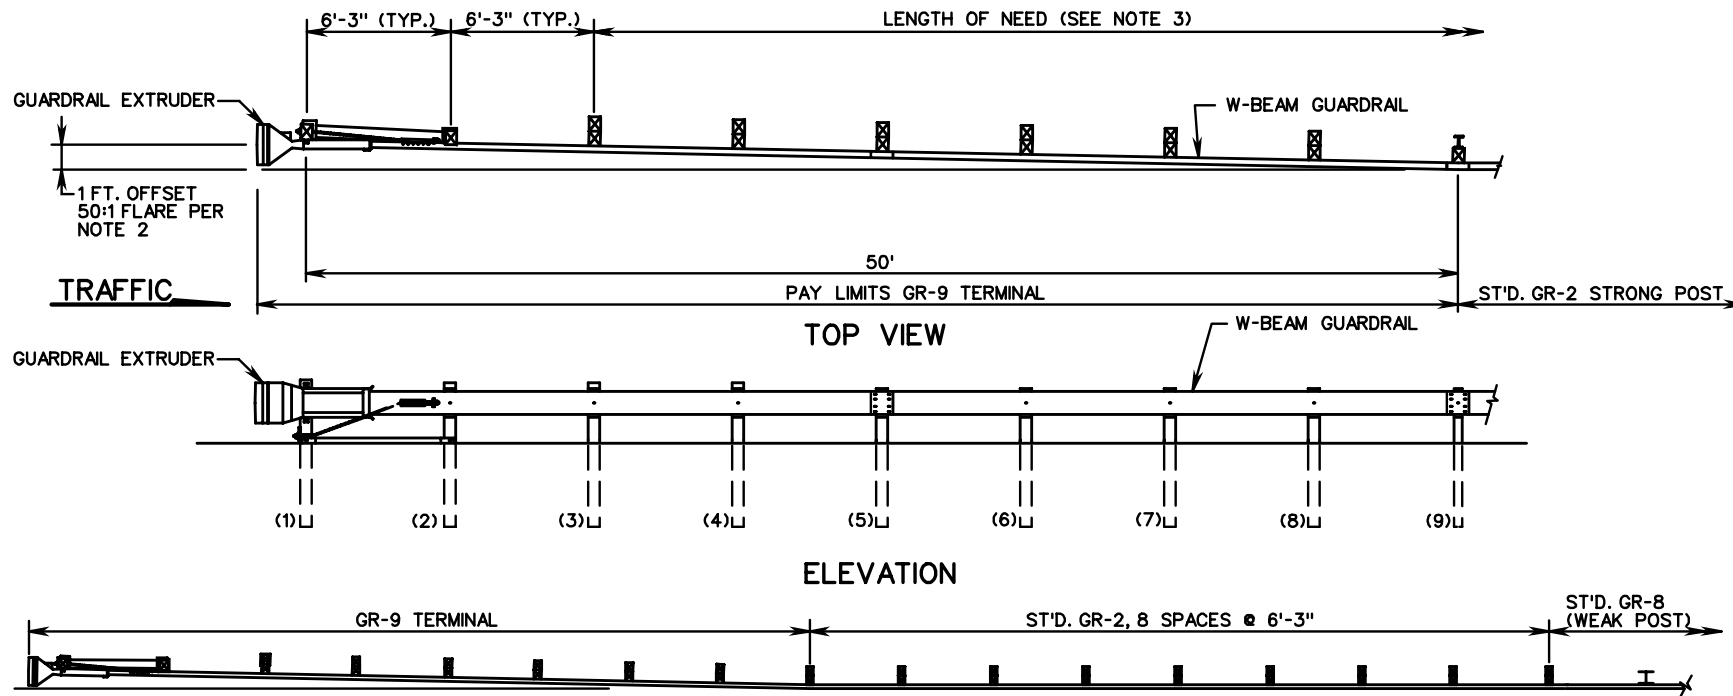

NOTES:

1. ALTERNATE BREAKAWAY CABLE TERMINAL (GR-9) IS TO BE ET-2000 (SIMILAR TO AS SHOWN), OR CAT (ST'D. MB-3 TERMINAL OPTION) AS MANUFACTURED BY SYRO STEEL COMPANY, BRAKEMASTER (ST'D. MB-3 TERMINAL OPTION) AS MANUFACTURED BY ENERGY ABSORPTION SYSTEMS, INC., THE SKT-350 AS MANUFACTURED BY ROAD SYSTEMS, INC., OR OTHER VDOT APPROVED EQUAL MEETING NCHRP 350 TESTING CRITERIA.
2. ALL TERMINALS SHALL BE INSTALLED ACCORDING TO THE MANUFACTURE'S INSTALLATION INSTRUCTIONS AND THE FOLLOWING VDOT REQUIREMENTS:
 - A. ALL STANDARD GR-9 TERMINALS (SIMILAR TO AS SHOWN ABOVE) SHALL BE INSTALLED WITH A 1 FT. OFFSET ACCOMPLISHED WITH A 50:1 FLARE TO PREVENT THE GUARDRAIL EXTRUDER FROM ENCROACHING ON THE SHOULDER FOR 3R WORK WHERE RIGHT OF WAY IS LIMITED, THE OFFSET CAN BE DECREASED AS DIRECTED BY THE ENGINEER.
 - B. DIRECTION OF THE REFLECTIVE TAPE ON THE EXTRUDER SHALL CONFORM TO MUTCD APPLICATION FOR DIAGONAL STRIPES ON OBJECT MARKERS AND BRIDGE END PANELS. COLOR OF TAPE SHALL BE AMBER (YELLOW).
 - C. DO NOT CHANGE THE LAPPING OF TERMINAL FOR ANY INSTALLATIONS; INSTALL AS TESTED.
3. IF THE CALCULATED LENGTH OF NEED CANNOT BE MET FOR THE SITES OF RETROFIT, MAINTENANCE, OR UPGRADE OF TERMINALS, PROVIDE AS MUCH DISTANCE AS POSSIBLE TO THE HAZARD.
4. THIS DRAWING IS REPRESENTATIONAL ONLY. DETAILS, DIMENSIONS, QUANTITIES, AND OTHER INFORMATION NOT SHOWN WILL VARY FOR EACH MANUFACTURER. SEE INDIVIDUAL MANUFACTURER'S PLANS FOR THIS INFORMATION.

VDOT

ROAD AND BRIDGE STANDARDS

SHEET 1 OF 2

REVISION DATE

501.16




ALTERNATE BREAKAWAY CABLE TERMINAL

NO FLARE

VIRGINIA DEPARTMENT OF TRANSPORTATION



SPECIFICATION
REFERENCE

505

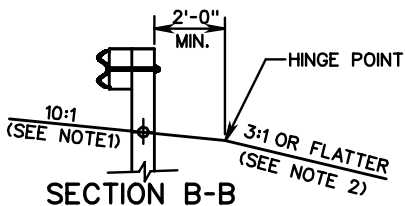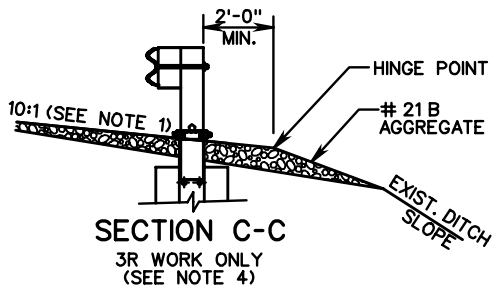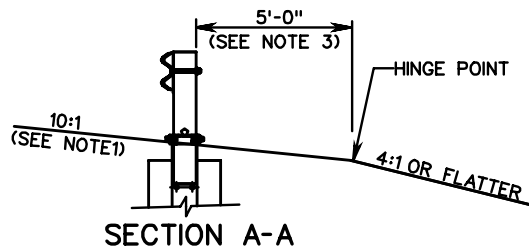

NOTES:

1. THE CROSS SLOPE OF THE GRADE APPROACHING THE GUARDRAIL TERMINAL, AND ADJACENT TO FOR ITS FULL LENGTH, MUST BE 10:1. IF THE EXISTING GRADE IS FLAT OR IS A POSITIVE SLOPE DUE TO THE SUPERELEVATION OF THE ROADWAY PAVEMENT, THE MINIMUM OFFSET FROM BEHIND THE POST TO THE HINGE POINT, AS SHOWN, IS REQUIRED.
2. THE AREA IMMEDIATELY BEHIND AND BEYOND THE TERMINAL SHOULD BE TRAVERSABLE AND FREE FROM FIXED OBJECTS. IF A CLEAR RUN OUT IS NOT ATTAINABLE THIS AREA SHOULD AT LEAST BE SIMILAR IN CHARACTER TO THE UPSTREAM UNSHIELDED ROADSIDE AREAS.
3. FOR NEW CONSTRUCTION AND RECONSTRUCTION THE 10:1 SLOPE GRADING MUST EXTEND A MINIMUM OF 5'-0" BEHIND THE END POST.
4. FOR 3R WORK, THE GRADING SHOULD BE AS CLOSE AS POSSIBLE TO THE NEW CONSTRUCTION WITH SLOPE EXTENDING A MINIMUM OF 2'-0" BEHIND THE BLOCKED OUT POST. FROM THE HINGE POINT, TIE THE GRADED SLOPE INTO THE EXISTING DITCH SLOPE TO COVER THE FOUNDATION TUBES AND SOIL PLATES WITHOUT EXTENDING THIS SLOPE BEYOND THE DITCH BOTTOM. USE #21B AGGREGATE, OR OTHER SUITABLE MATERIAL AS APPROVED BY THE ENGINEER, AT ROADWAY SHOULDERS.
5. THE TAPER FOR NEW CONSTRUCTION WILL BE 15:1. FOR 3R WORK THE MINIMUM ALLOWABLE TAPER IS 10:1.
6. FOR PROPRIETARY GUARDRAIL TERMINALS THE MANUFACTURER'S SITE PREPARATION REQUIREMENTS TAKE PRECEDENCE OVER THIS STANDARD.

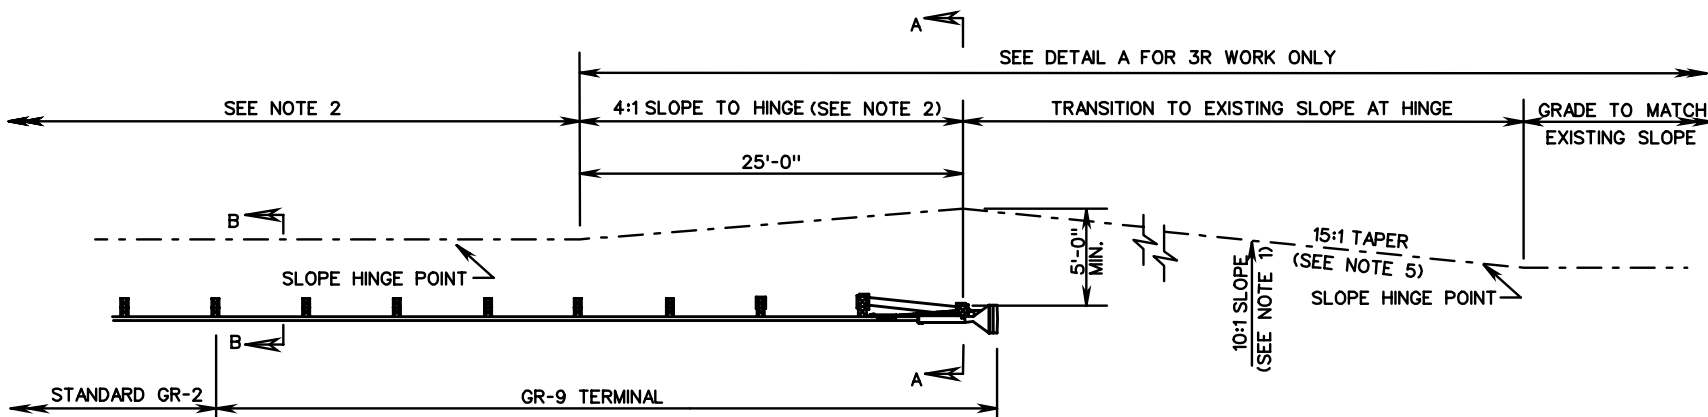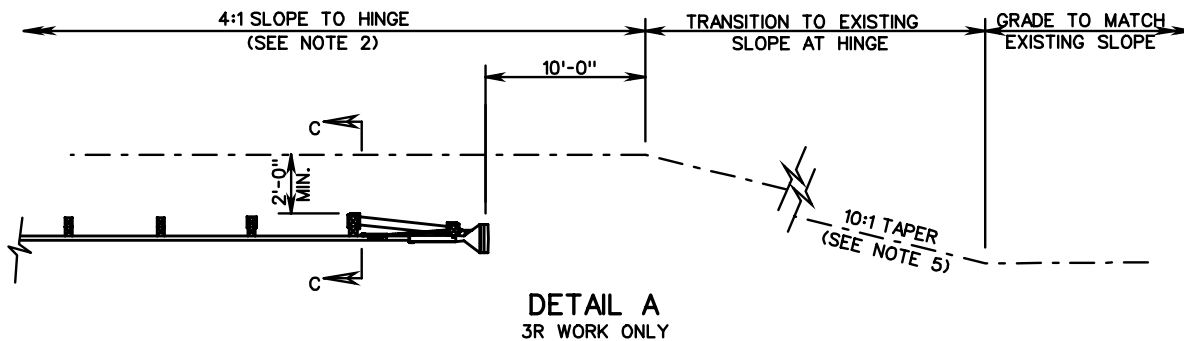

SPECIFICATION REFERENCE

GUARDRAIL TERMINAL INSTALLATION SITE PREPARATION REQUIREMENTS FOR GR-9

VIRGINIA DEPARTMENT OF TRANSPORTATION


VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE


SHEET 2 OF 2

501.17

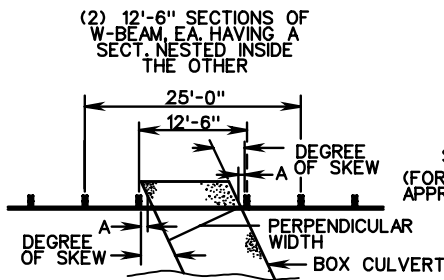

**ONE POST OMITTED
TOP VIEW**


FOR DETAILS OF GUARDRAIL POSTS AND BLOCKOUTS, SEE STANDARD GR-2, 2A.




**TABLE OF MAXIMUM
ALLOWABLE STRUCTURE
WIDTHS FOR THIS DESIGN**

* "A" THE MINIMUM ALLOWABLE DISTANCE BETWEEN CLOSEST POINT OF POST TO STRUCTURE.

TYPE I - ONE POST OMITTED			TYPE II - TWO POST OMITTED		
SKEW	A*	MAX. PERPENDICULAR WIDTH (FEET)	SKEW	A*	MAX. PERPENDICULAR WIDTH (FEET)
0°	9"	10.5	0°	9"	16.75
5°	9"	10.4	5°	9"	16.6
10°	9"	10.2	10°	9"	16.4
15°	9"	10.0	15°	9"	16.0
20°	9"	9.6	20°	9"	15.5
25°	9"	9.2	25°	9"	14.9
30°	9"	8.8	30°	9"	14.2
35°	9"	8.2	35°	9"	13.2
40°	9"	7.6	40°	9"	12.4
45°	9"	7.0	45°	9"	11.4

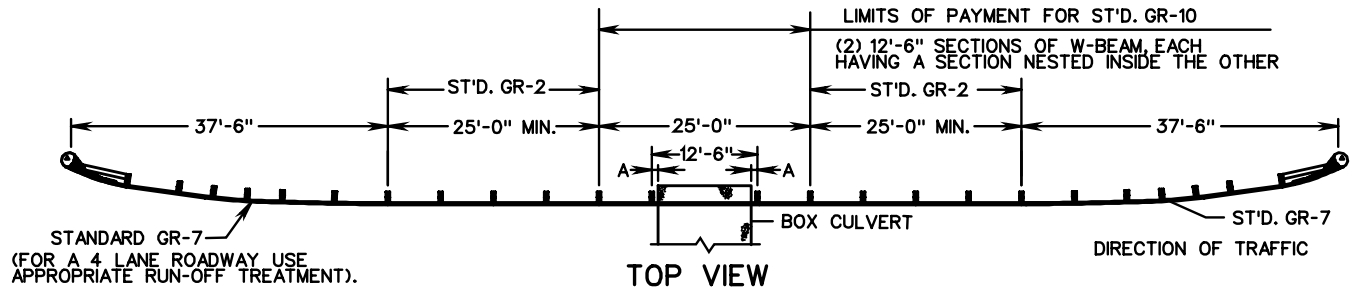


TOP VIEW

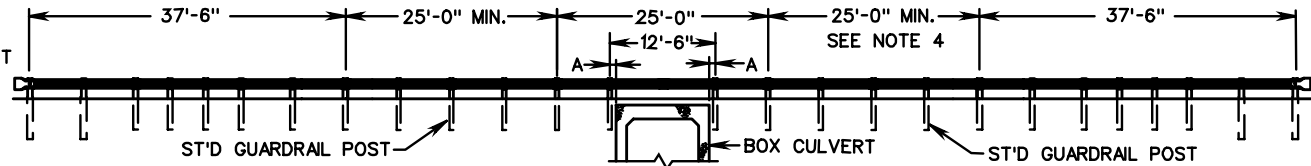


ELEVATION

TYPE I-ONE POST OMITTED

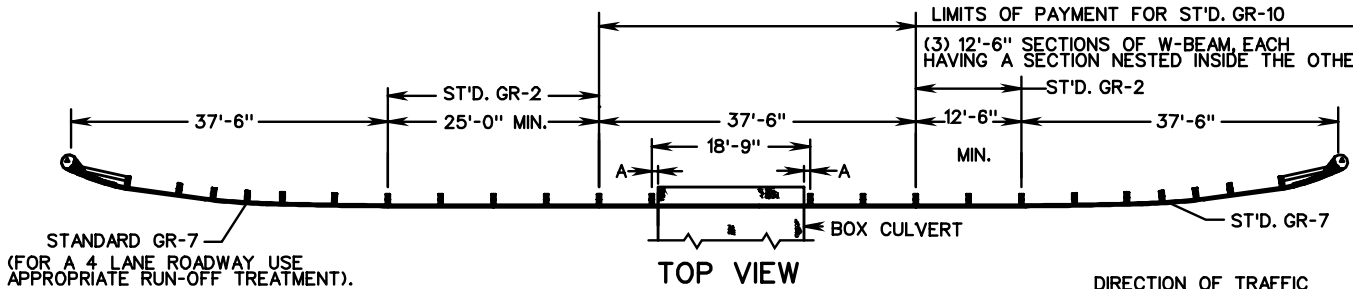

TOP VIEW

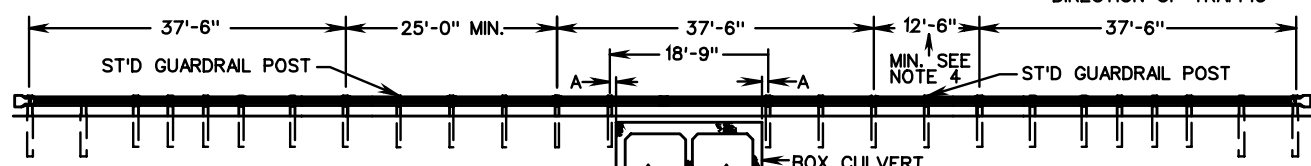

ELEVATION

TYPE II-TWO POSTS OMITTED

- NOTES:**
1. THIS SHEET IS APPLICABLE WHEN GUARDRAIL IS REQUIRED AND THE DEPTH OF FILL ABOVE THE TOP SLAB OF THE BOX CULVERT IS LESS THAN 4'-0".
 2. GUARDRAIL INSTALLATION SHALL BE IN ACCORDANCE WITH SECTION 505 OF THE SPECIFICATIONS. MATERIAL REQUIREMENT FOR COMPONENTS SHALL BE IN ACCORDANCE WITH SECTION 221 OF THE SPECIFICATIONS.
 3. GUARDRAIL POST SPACING SHALL BE IN ACCORDANCE WITH STANDARD GR-2.
 4. THIS DISTANCE SHALL BE IN ACCORDANCE WITH VDOT POLICY ON DETERMINING THE LENGTH OF NEED FOR GUARDRAIL WITH A MINIMUM DISTANCE AS SHOWN.
 5. ALL SPLICES IN NESTED W-BEAM SECTIONS MUST COINCIDE AT A COMMON POINT AND BE BOLTED TOGETHER USING ONE SET OF BOLTS AT EACH SPLICE.



ROAD AND BRIDGE STANDARDS

GUARDRAIL AT LOW-FILL CULVERTS

SPECIFICATION REFERENCE


SHEET 1 OF 2

REVISION DATE

VIRGINIA DEPARTMENT OF TRANSPORTATION


221
505

501.18

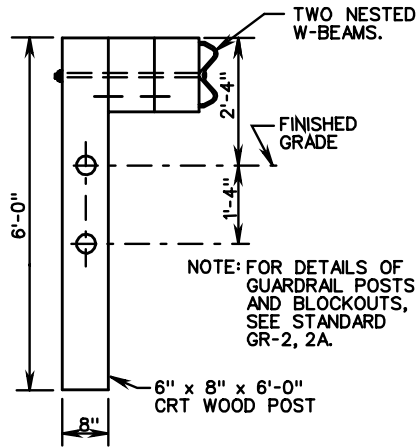

NOTE: FOR DETAILS OF GUARDRAIL POSTS AND BLOCKOUTS, SEE STANDARD GR-2, 2A.


CRT POST WITH DOUBLE BLOCKOUTS

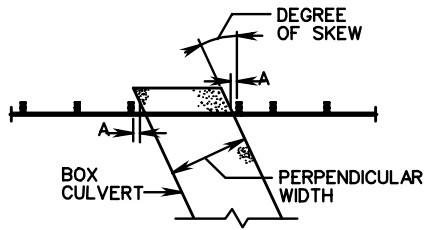


THREE POSTS OMITTED TOP VIEW

TYPE III-THREE POSTS OMITTED		
SKEW	A*	MAX. PERPENDICULAR WIDTH (FEET)
0°	9"	23.00
5°	9"	22.90
10°	9"	22.60
15°	9"	22.10
20°	9"	21.40
25°	9"	20.60
30°	9"	19.60
35°	9"	18.40
40°	9"	17.10
45°	9"	15.60

* "A" THE MINIMUM ALLOWABLE DISTANCE BETWEEN CLOSEST POINT OF POST TO STRUCTURE.

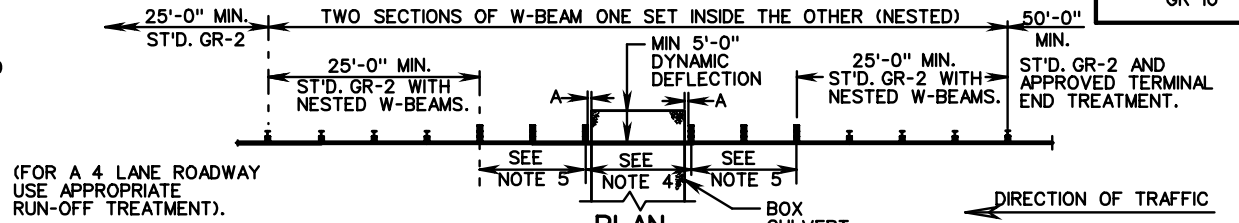

ELEVATION
TWO WAY TRAFFIC
TYPE III THREE POSTS OMITTED

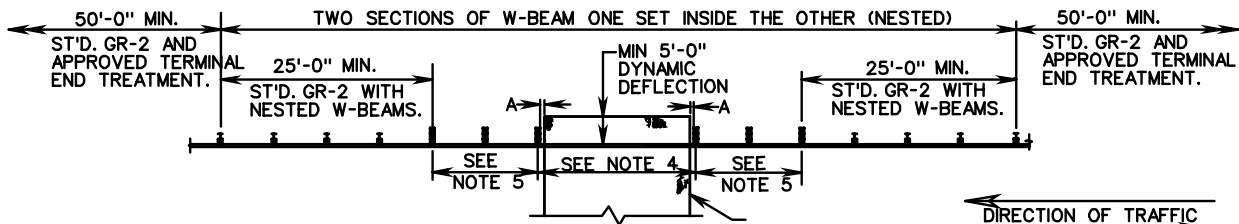

ELEVATION
TWO WAY TRAFFIC
TYPE III THREE POSTS OMITTED

NOTES:

1. THIS SHEET IS APPLICABLE WHEN GUARDRAIL IS REQUIRED AND THE DEPTH OF FILL ABOVE THE TOP SLAB OF THE BOX CULVERT IS LESS THAN 4'-0".
2. GUARDRAIL INSTALLATION SHALL BE IN ACCORDANCE WITH SECTION 505 OF THE SPECIFICATIONS. MATERIAL REQUIREMENT FOR COMPONENTS SHALL BE IN ACCORDANCE WITH SECTION 221 OF THE SPECIFICATIONS.
3. GUARDRAIL POST SPACING SHALL BE IN ACCORDANCE WITH STANDARD GR-2.
4. TWO NESTED W-BEAM GUARDRAILS, SEE TABLE FOR ALLOWABLE WIDTHS (25'-0" MAXIMUM).
5. TWO NESTED W-BEAM GUARDRAILS, CRT WOODPOST, 6'-3" SPACING, WITH TWO 6"x8"x14" WOOD OR RECYCLED MATERIAL BLOCKOUTS.
6. ALL SPLICES IN NESTED W-BEAM SECTIONS MUST COINCIDE AT A COMMON POINT AND BE BOLTED TOGETHER USING ONE SET OF BOLTS AT EACH SPLICE.

SPECIFICATION REFERENCE

221
505

GUARDRAIL AT LOW-FILL CULVERTS

VIRGINIA DEPARTMENT OF TRANSPORTATION




ROAD AND BRIDGE STANDARDS


REVISION DATE

SHEET 2 OF 2


501.19

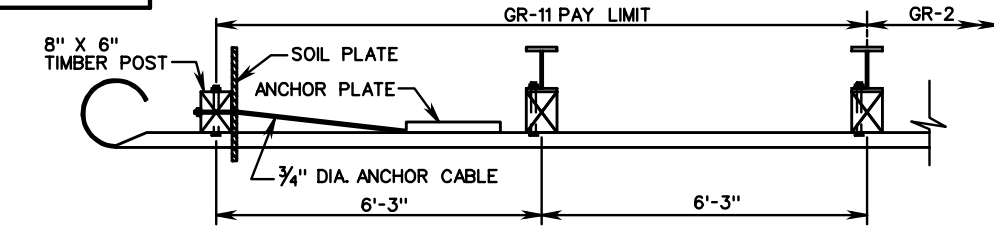


PLAN

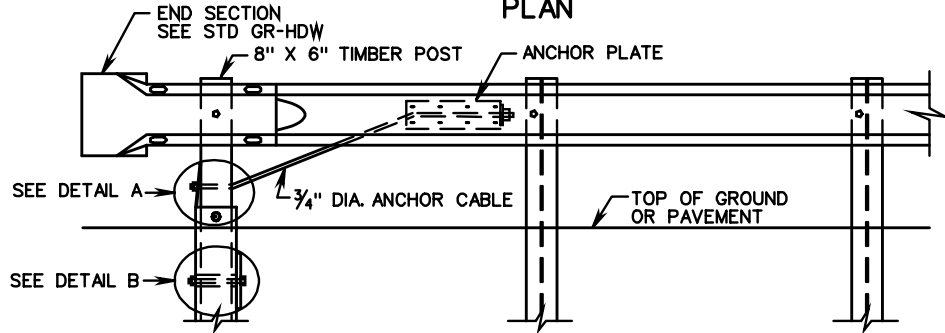


ELEVATION

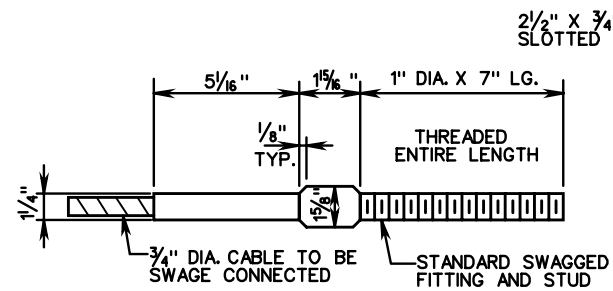


ANCHOR CABLE SWAGE CONNECTION TO THREADED STUD

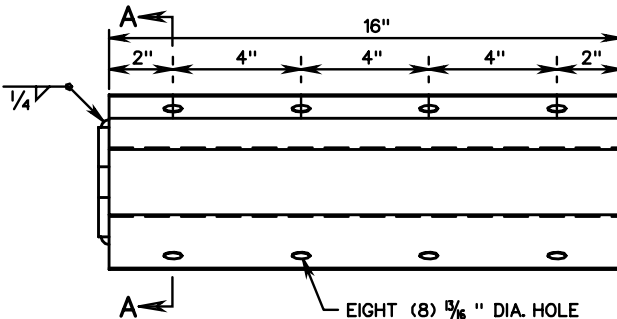


ANCHOR PLATE DETAILS

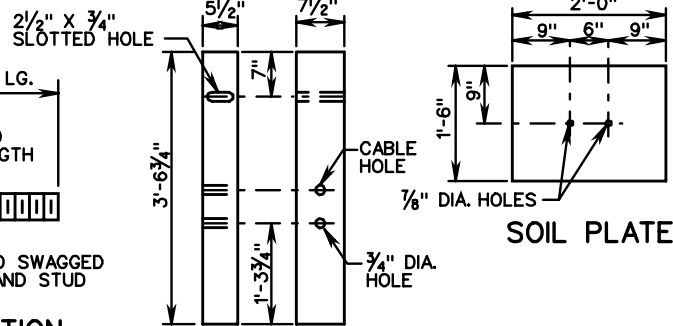


SHORT WOODEN POST

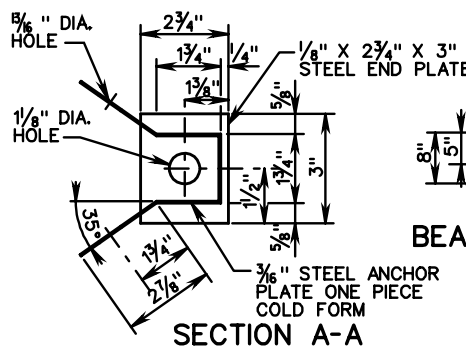


SECTION A-A

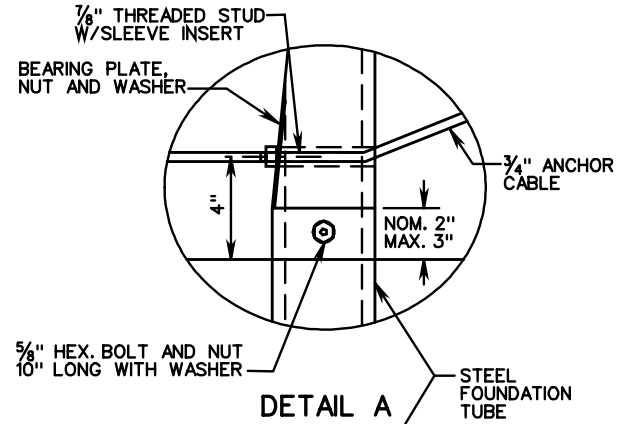


DETAIL A

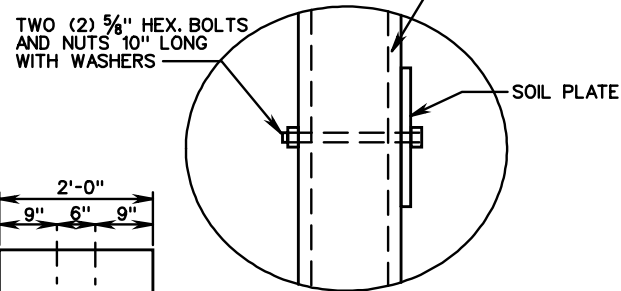

DETAIL B



SOIL PLATE

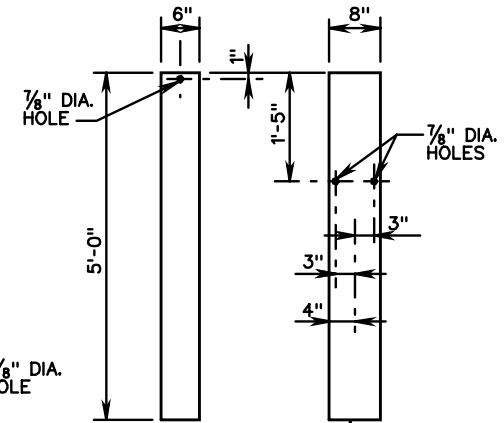

STEEL FOUNDATION TUBE

BEARING PLATE

NOTE: USE OF THIS TERMINAL TREATMENT IS RESTRICTED TO RUN-OFF CONDITIONS ON DIVIDED HIGHWAYS.

THIS PAGE INTENTIONALLY LEFT BLANK

SPECIFICATION
REFERENCE

--

--

VIRGINIA DEPARTMENT OF TRANSPORTATION




ROAD AND BRIDGE STANDARDS

REVISION DATE


SHEET 1 OF 1

501.21



PLAN

NOTE: MAINTAIN 6'-3" POST SPACING WHEREVER POSSIBLE FOR USE WITH 25' STANDARD RAIL SECTION. SYMMETRY OF POST SPACING IS NOT NECESSARY.

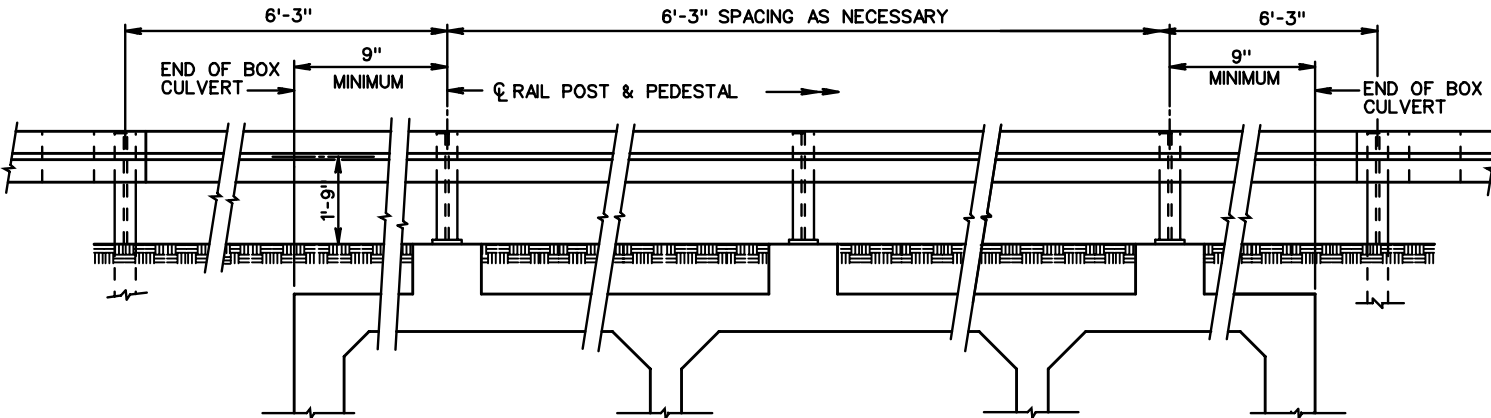

LONGITUDINAL SECTION

GENERAL NOTE:

ALL STRUCTURAL STEEL, INCLUDING BOLTS, NUTS, AND WASHERS SHALL BE GALVANIZED.

FOR DETAILS OF GUARDRAIL, SEE GR-2 OF THE ROAD AND BRIDGE STANDARDS.

THE GUARDRAIL INSTALLATION SHALL CONFORM WITH SECTION 505 OF THE CURRENT VIRGINIA DEPARTMENT OF TRANSPORTATION ROAD AND BRIDGE SPECIFICATIONS.

RAIL POSTS MAY BE VERTICAL OR PERPENDICULAR TO ADJACENT ROADWAY GRADE AND CROSS SLOPE. TOP OF PEDESTAL SHALL BE SLOPED AS NECESSARY FOR PERPENDICULAR INSTALLATION.

DETAILS ON THIS SHEET ARE TO BE USED FOR BOTH STRAIGHT AND SKEWED BOXES.

ANCHOR BOLTS SHALL BE 7/8" ØA307 (OR A36 THREADED RODS WITH TACK WELDED NUTS) WITH HEX NUTS AND WASHERS AS SHOWN. THREADED RODS MAY BE 0.781 MIN. DIAMETER WITH ROLLED THREADS. NUTS SHALL CONFORM TO A307 REQUIREMENTS AND SHALL BE TAPPED OR CHASED AFTER GALVANIZING. BOLTS AND NUTS SHALL HAVE CLASS 2A AND 2B FIT TOLERANCES. BOLTS SHALL BE EMBEDDED 8" INTO THE CONCRETE.

THIS RAIL HAS BEEN SUCCESSFULLY EVALUATED BY FULL SCALE IMPACT TESTS CONDUCTED IN ACCORDANCE WITH NCHRP REPORT 153. TEST DOCUMENTATION MAY BE FOUND IN RESEARCH REPORT 230-1, "TUBULAR W-BEAM BRIDGE RAIL", OF RESEARCH STUDY 2-5-78-230 "BRIDGE RAIL TO CONTAIN HEAVY TRUCKS AND BUSES", TEXAS TRANSPORTATION INSTITUTE, OCTOBER 1978.

TUBULAR GUARD RAIL SHALL BE FURNISHED AND INSTALLED IN 25 FT. SECTIONS. TUBULAR RAIL MEMBER SHALL BE EXTENDED AND CONNECTED TO AT LEAST THE FIRST SOIL EMBEDDED POST AT EACH END OF THE STRUCTURE. MORE SUCH POSTS SHALL BE USED TO UTILIZE 25 FT. STANDARD SECTIONS. APPROACH GUARDRAIL POSTS SHALL BE SPACED AT 6'-3" ADJACENT TO THE TUBULAR RAIL SINCE ITS FLEXIBILITY IS SIMILAR TO THE STANDARD METAL BEAM GUARDRAIL. DO NOT INSTALL ADDITIONAL POSTS AT 3'-1/2" CENTERS. FULLY ANCHORED GUARDRAIL MUST BE ATTACHED AT BOTH ENDS OF TUBULAR RAIL.

TESTS HAVE SHOWN THAT ALTHOUGH THIS RAIL DEFLECTS HORIZONTALLY TWO OR THREE FEET, ADEQUATE VEHICLE CONTAINMENT AND RE-DIRECTION IS ACHIEVED. THE RESULTING MORE GRADUAL DECELERATION THUS PRODUCES A SAFER CONDITION THAN AFFORDED BY OTHER BRIDGE RAILINGS.

THE CONTRACTOR SHALL DETERMINE THE NUMBER OF PEDESTALS REQUIRED FOR GUARDRAIL INSTALLATION ACROSS THE BOX, PEDESTAL HEIGHT AND DIMENSIONS OF THE BR SERIES REINFORCING BARS. THE QUANTITY OF CONCRETE (CLASS A4) AND REINFORCING STEEL USED IN THE PEDESTALS SHALL BE FIELD VERIFIED AND PAID FOR AT THE UNIT PRICE BID FOR THE CORRESPONDING BOX QUANTITIES. THE RAILING (TEXAS T-6) SHALL BE MEASURED IN 25 FT. SECTIONS AND PAID FOR AT THE CONTRACT UNIT PRICE PER LINEAR FOOT IN ACCORDANCE WITH SECTION 410.04 OF THE SPECIFICATIONS. BR SERIES BARS SHALL BE #5 IN SIZE.

FOR DETAILS OF BOX CULVERTS, SEE THE BOX CULVERT STANDARDS.

THIS SHEET IS APPLICABLE WHEN GUARDRAIL IS REQUIRED AND THE DEPTH OF FILL ABOVE THE TOP SLAB OF THE BOX CULVERT IS LESS THAN 3'-7".

DETAILS SHOWN ARE FOR INSTALLATION ON NEW BOX CULVERTS. INSTALLATION OF PEDESTALS ON EXISTING BOX CULVERTS SHALL BE IN ACCORDANCE WITH SEC. 412.03 OF THE SPECIFICATIONS EXCEPT THAT DOWELS SHALL BE PLACED BETWEEN 3 AND 6 INCHES FROM THE EDGE OF THE PEDESTAL.

PRECAST BOXES SHALL BE TREATED AS AN EXISTING BOX FOR PEDESTAL INSTALLATION.

THIS UNIT IS ONLY TO BE USED WHEN DESIGN SPEED IS 45 MPH OR LESS. TESTED - NCHRP 350 TEST LEVEL 2



ROAD AND BRIDGE STANDARDS

STANDARD BOX CULVERT GUARDRAIL

SPECIFICATION REFERENCE

SHEET 1 OF 3


REVISION DATE

(TEXAS T-6)


STRUCTURE AND BRIDGE DIVISION

501.22


VIRGINIA DEPARTMENT OF TRANSPORTATION

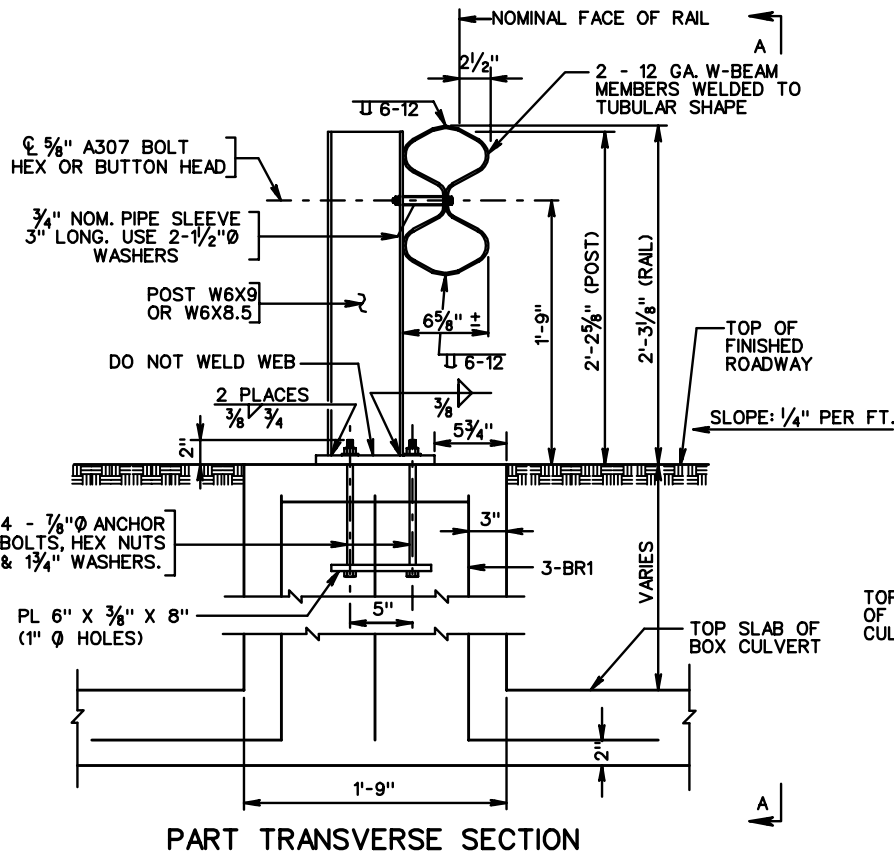

PART TRANSVERSE SECTION

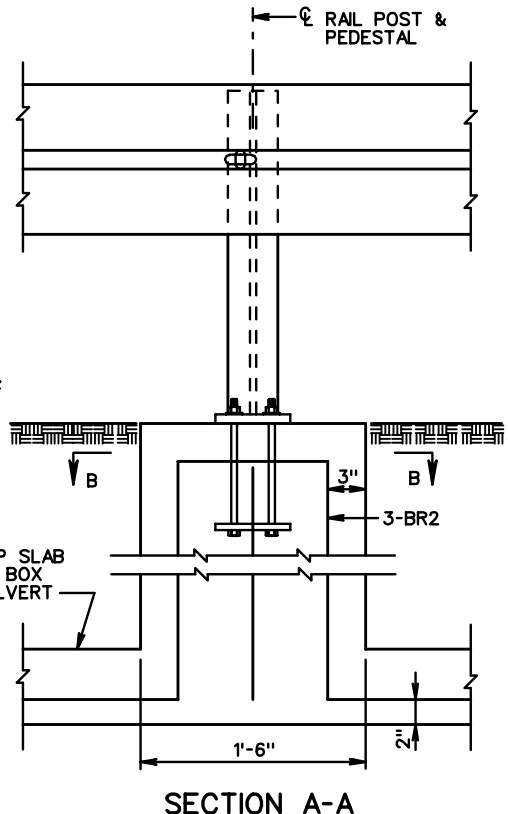

SECTION A-A

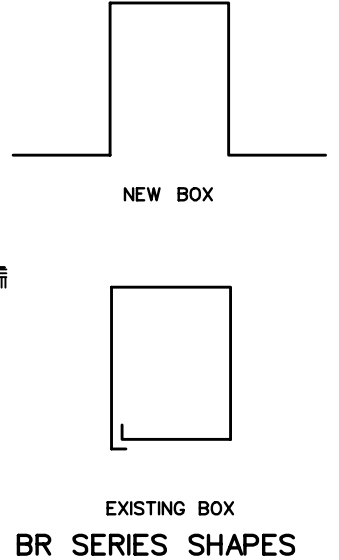

4 - 7/8" Ø ANCHOR BOLTS, HEX NUTS & 1 3/4" WASHERS.

PL 6" X 3/8" X 8" (1" Ø HOLES)

POST W6X9 OR W6X8.5

Ø 5/8" A307 BOLT HEX OR BUTTON HEAD


3/4" NOM. PIPE SLEEVE 3" LONG. USE 2-1/2" Ø WASHERS

DO NOT WELD WEB



2 PLACES 3/8" V 3/4"

TOP OF FINISHED ROADWAY

SLOPE: 1/4" PER FT.

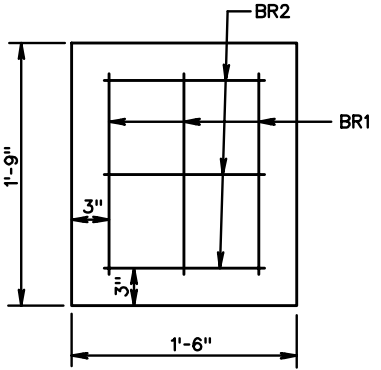

SECTION B-B (ANCHOR BOLTS NOT SHOWN)

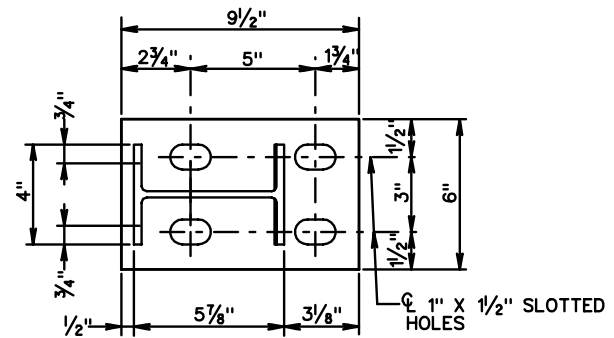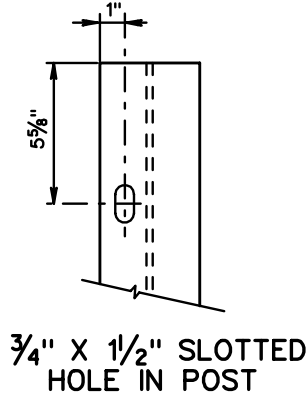

5/8" BASE PLATE (1" X 1/2" SLOTTED HOLES)

SPECIFICATION REFERENCE
STRUCTURE AND BRIDGE DIVISION

STANDARD BOX CULVERT GUARDRAIL (TEXAS T-6)


VIRGINIA DEPARTMENT OF TRANSPORTATION




ROAD AND BRIDGE STANDARDS

REVISION DATE SHEET 2 OF 3


501.23

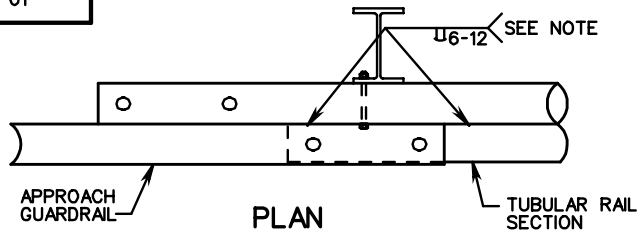


PLAN

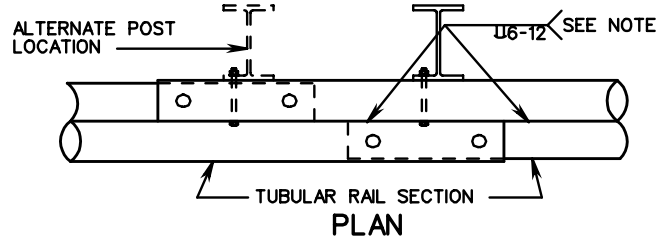

PLAN

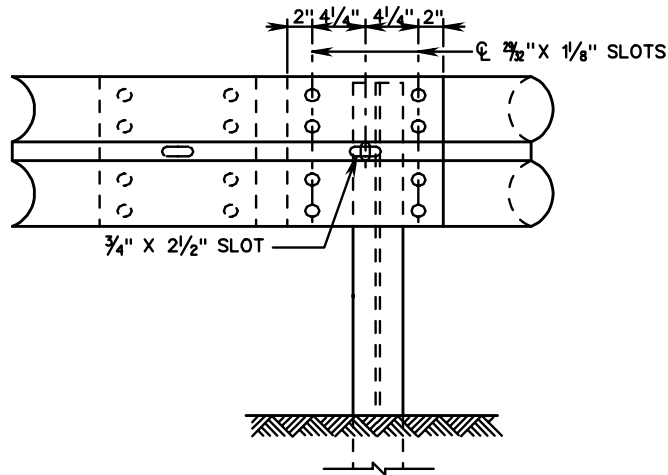

GUARDRAIL-TUBULAR RAIL SPLICE

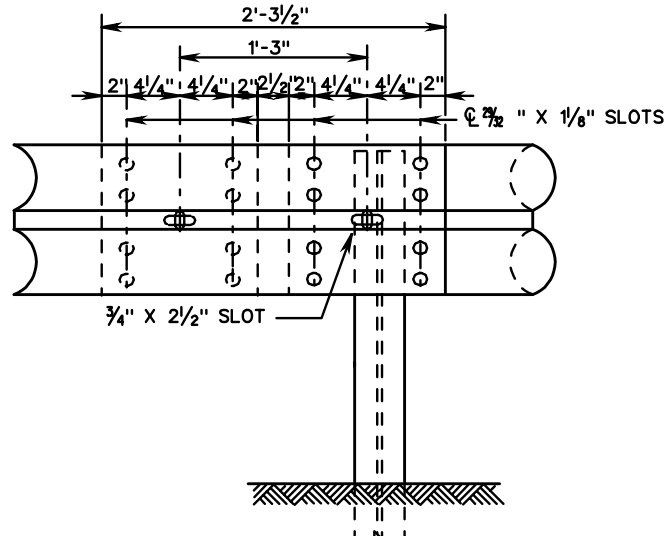


TUBULAR RAIL SPLICE

NOTES:

TUBULAR W-BEAM RAIL MEMBER IS TO BE FABRICATED FROM STANDARD 25' NOMINAL W-BEAM SECTIONS. TOP AND BOTTOM SEAMS SHALL BE BUTT WELDED 6" AT 12" SPACING. CONTINUOUS SEAM WELDING IS ALSO ACCEPTABLE. WELDS SHALL BE CHIPPED AND CLEANED AND THE COMPLETE 25 FT. TUBULAR MEMBER SHALL BE GALVANIZED AFTER FABRICATION. FOR TUBULAR RAIL SPLICE ADDITIONAL POST MOUNTING SLOTS ARE TO BE MADE IN EACH MEMBER 1'-3" FROM THE STANDARD SLOTS AT 6'-3" CENTERS.

8-5/8" SPLICE NUTS SHALL BE TACK WELDED TO A BENT SHEET METAL POSITIONER AS SHOWN. OTHER SUITABLE POSITIONING METHODS OR DEVICES MAY BE SUBSTITUTED. THE COMPLETED SPLICE SHALL HAVE 8 BOLTS (16 BOLTS IF A TUBULAR RAIL SPLICE). EACH BOLT WILL INCLUDE A 1 3/4" X 3" X 3/16" PLATE WASHER OR A 2 INCH DIAMETER WASHER.

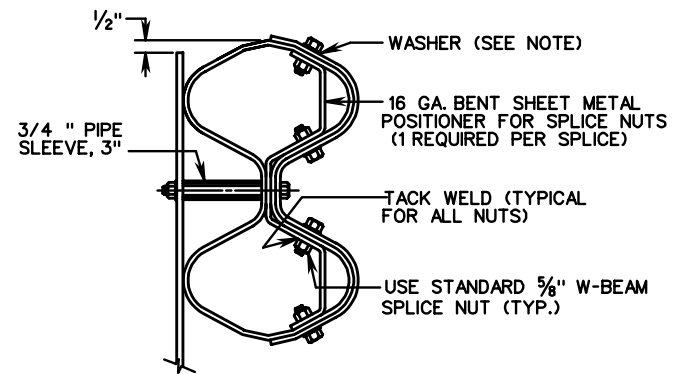

SPLICE DETAIL



ROAD AND BRIDGE STANDARDS

STANDARD BOX CULVERT GUARDRAIL
(TEXAS T-6)

SPECIFICATION
REFERENCE



SHEET 3 OF 3

REVISION DATE

STRUCTURE
AND
BRIDGE DIVISION


501.24

VIRGINIA DEPARTMENT OF TRANSPORTATION

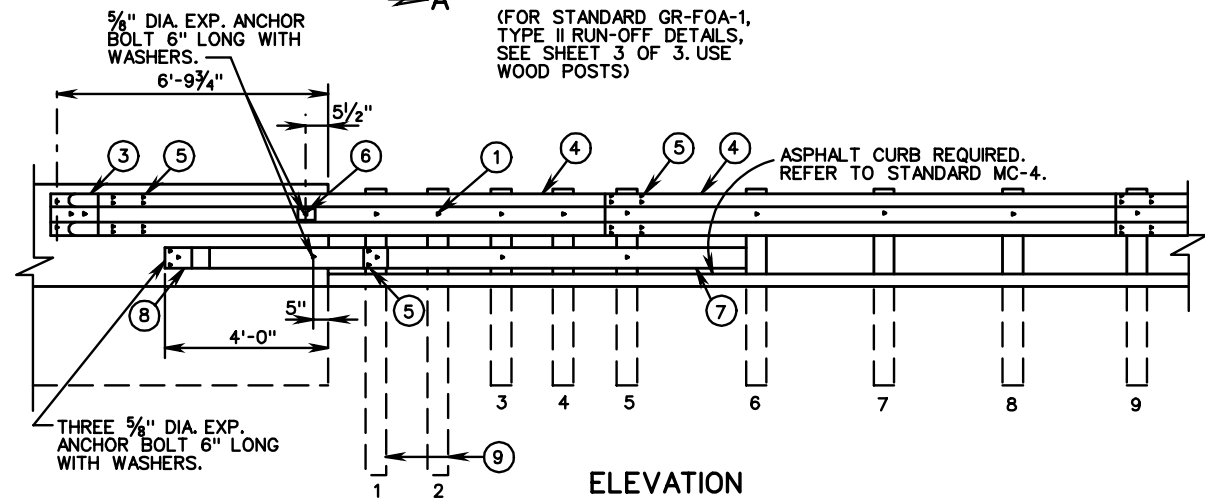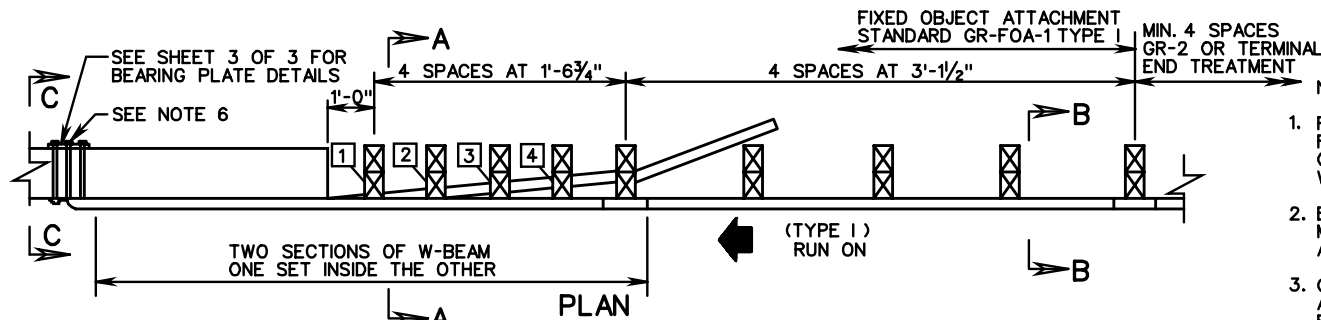

- NOTES:
1. FIXED OBJECTS MAY CONSIST OF BRIDGE RAILS, ABUTMENTS, PIERS, RETAINING WALLS, OR OTHER FLAT SURFACED STRUCTURES WITH VERTICAL FACE.
 2. BRIDGE RAIL ENDS AND BRIDGE PARAPETS MUST BE OF ADEQUATE STRENGTH TO ACCEPT FULL IMPACT LOADING.
 3. GUARDRAIL COMPONENTS SHALL BE IN ACCORDANCE WITH VDOT ROAD AND BRIDGE STANDARDS.
 4. POSTS 1, 2, 3, 4, AND 5 REQUIRE AN ADDITIONAL HOLE TO ATTACH BLOCKS AND/OR RUBRAIL RUBRAIL IS NOT BOLTED TO POSTS 2 AND 4.
 5. BOTTOM WOOD BLOCKS LOCATED ON POSTS 1 THROUGH 4, ARE CENTER DRILLED AND SECURED WITH 5/8" CARRIAGE BOLTS. (LENGTH AS REQUIRED).
 6. APPROPRIATE LENGTH 7/8" DIAMETER ASTM A325 HEX BOLTS WITH WASHERS MUST BE USED WITH THRU DRILLED HOLES WITH A 5/8" BEARING PLATE ON THE BACK SIDE OF THE BRIDGE PARAPET OR TERMINAL WALL.
 7. DRIVE NAIL WITHIN 2" OF THE TOP OR BOTTOM OF THE BLOCKOUT AFTER 5/8" X 18 BOLT IS INSTALLED.
 8. SEE SHEET 3 OF 3 FOR RUBRAIL BLOCKOUT DETAILS.


NEW BRIDGES - ATTACHMENTS
 ONE WAY TRAFFIC - RUN-ON, 2-GR-FOA-1, TYPE I
 - RUN-OFF, 2-GR-FOA-1, TYPE II
 TWO WAY TRAFFIC - RUN-ON, 4-GR-FOA-1, TYPE I
 EXISTING BRIDGE ATTACHMENTS AS SHOWN ON PLANS.

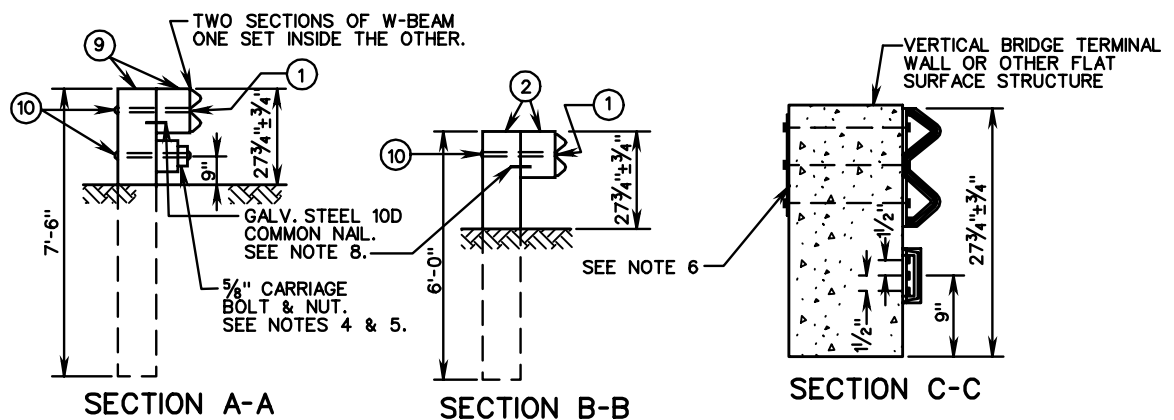

ITEM	MATERIAL/SPECIFICATIONS/NOTES
①	5/8" X 18" LONG. GUARDRAIL BOLT AND RECESSED NUT
②	STANDARD 6" x 8" WOOD POST AND BLOCK
③	STANDARD W-BEAM TERMINAL CONNECTOR
④	STANDARD W-BEAM RAIL
⑤	5/8" X 2" LONG GUARDRAIL BOLT & RECESSED NUT (SEE ST'D. GR-HDW)
⑥	RECTANGULAR PLATE WASHER (SEE ST'D. GR-HDW)
⑦	BENT PLATE RUBRAIL (SEE SHEET 3 OF 3)
⑧	C6 X 8.2 RUBRAIL (SEE SHEET 3 OF 3)
⑨	8" X 8" X 7'-6" LONG WOOD POST & 8" X 8" X 14" LONG TREATED PINE BLOCK OR RECYCLED MATERIAL
⑩	WASHER FOR 5/8" BOLT


SPECIFICATION REFERENCE 505	W-BEAM GUARDRAIL - FIXED OBJECT ATTACHMENT FOR USE BETWEEN VERTICAL FIXED OBJECTS AND GUARDRAIL (WOOD POSTS)	VDOT ROAD AND BRIDGE STANDARDS	
		REVISION DATE	SHEET 1 OF 3 501.25

VIRGINIA DEPARTMENT OF TRANSPORTATION

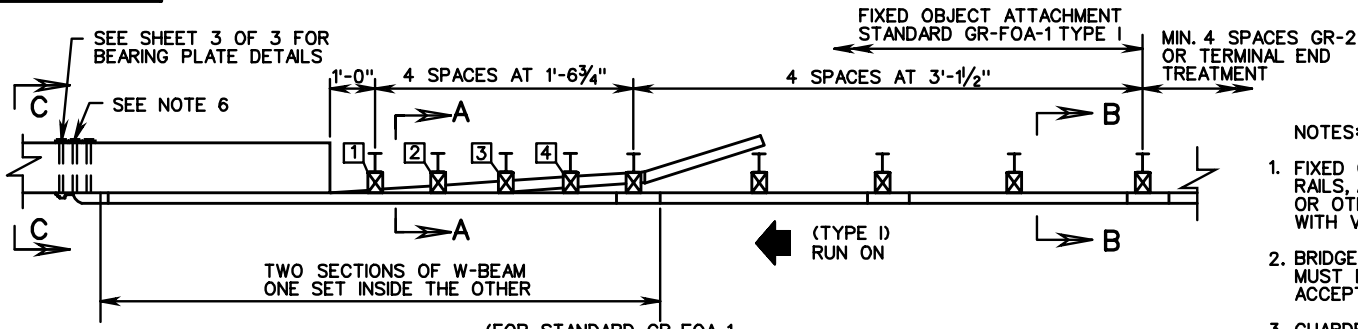


PLAN

(FOR STANDARD GR-FOA-1, TYPE II RUN-OFF DETAILS, SEE SHEET 3 OF 3. USE WOOD POSTS)

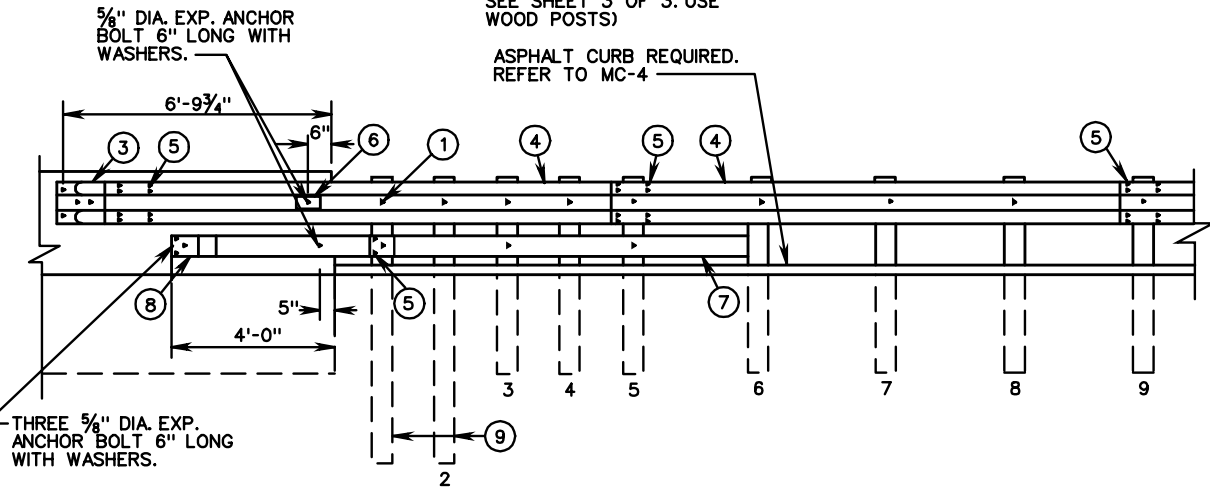


ELEVATION

NEW BRIDGES - ATTACHMENTS
 ONE WAY TRAFFIC - RUN-ON, 2-GR-FOA-1, TYPE I
 - RUN-OFF, 2-GR-FOA-1, TYPE II
 TWO WAY TRAFFIC - RUN-ON, 4-GR-FOA-1, TYPE I

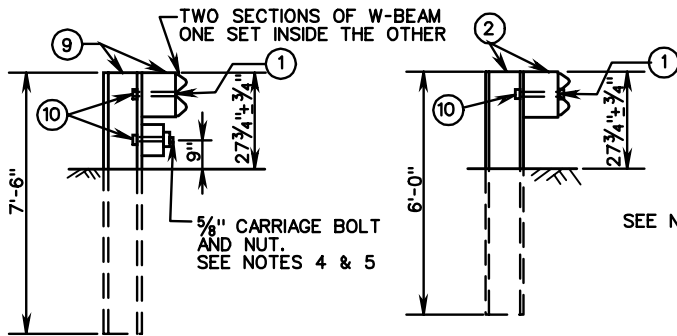

SECTION A-A

SECTION B-B

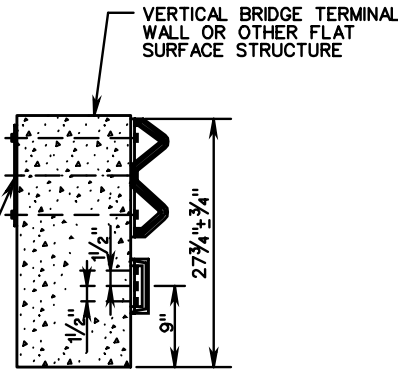

SECTION C-C

NOTES:

1. FIXED OBJECTS MAY CONSIST OF BRIDGE RAILS, ABUTMENTS, PIERS, RETAINING WALLS, OR OTHER FLAT SURFACED STRUCTURES WITH VERTICAL FACE.
2. BRIDGE RAIL ENDS AND BRIDGE PARAPETS MUST BE OF ADEQUATE STRENGTH TO ACCEPT FULL IMPACT LOADING.
3. GUARDRAIL COMPONENTS SHALL BE IN ACCORDANCE WITH VDOT ROAD AND BRIDGE STANDARDS.
4. POSTS 1, 2, 3, 4, AND 5 REQUIRE AN ADDITIONAL HOLE TO ATTACH BLOCKS AND/OR RUBRAIL RUBRAIL IS NOT BOLTED TO POSTS 2 AND 4.
5. BOTTOM WOOD BLOCKS LOCATED ON POSTS 1 THROUGH 4 ARE CENTER DRILLED AND SECURED WITH 5/8" CARRIAGE BOLTS. (LENGTH AS REQUIRED).
6. APPROPRIATE LENGTH 7/8" DIAMETER ASTM A325 HEX BOLTS WITH WASHERS MUST BE USED WITH THRU DRILLED HOLES WITH A 5/8" BEARING PLATE ON THE BACK SIDE OF THE BRIDGE PARAPET OR TERMINAL WALL.
7. SEE SHEET 3 OF 3 FOR RUBRAIL BLOCKOUT DETAILS.

ITEM	MATERIAL/SPECIFICATIONS/NOTES
①	5/8" X 10" LONG HEX BOLT WITH NUT
②	ST'D. W6X8.5 OR W6X9 STEEL POST ST'D. 6X8X14" LG. TREATED PINE BLOCK OR RECYCLED MATERIAL
③	STANDARD W-BEAM TERMINAL CONNECTOR
④	STANDARD W-BEAM RAIL
⑤	5/8" X 2" LONG GUARDRAIL BOLT & RECESSED NUT (SEE STANDARD GR-HDW)
⑥	RECTANGULAR PLATE WASHER (SEE ST'D. GR-HDW)
⑦	BENT PLATE RUBRAIL (SEE SHEET 3 OF 3)
⑧	C6 X 8.2 RUBRAIL (SEE SHEET 3 OF 3)
⑨	W8 X 13 X 7'-6" LONG STEEL POST WITH STANDARD 6" X 8" X 14" LONG TREATED PINE BLOCK OR RECYCLED MATERIAL
⑩	WASHER FOR 5/8" BOLT



ROAD AND BRIDGE STANDARDS

W-BEAM GUARDRAIL-FIXED OBJECT ATTACHMENT

FOR USE BETWEEN VERTICAL FIXED OBJECTS AND GUARDRAIL (STEEL POSTS)

SPECIFICATION REFERENCE


SHEET 2 OF 3

REVISION DATE

501.26


VIRGINIA DEPARTMENT OF TRANSPORTATION

505

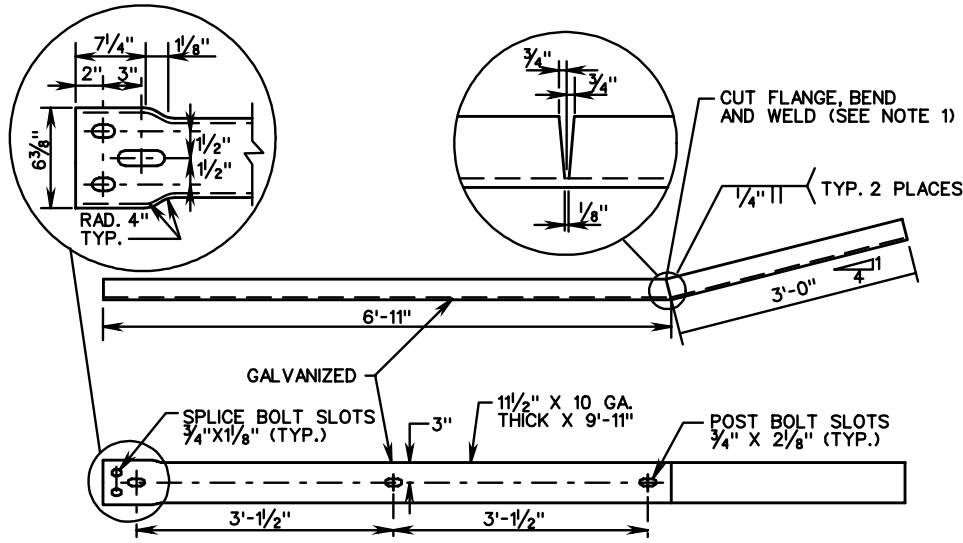

NOTE:
CAN BE FIELD CUT AND BENT USING HEAT.
IF SHOP CUT AND BENT, RIGHT HAND OR LEFT
HAND MUST BE SPECIFIED DEPENDING ON
WHICH SIDE OF THE ROADWAY THE TRANSITION
IS USED.

ITEM 7 DETAIL

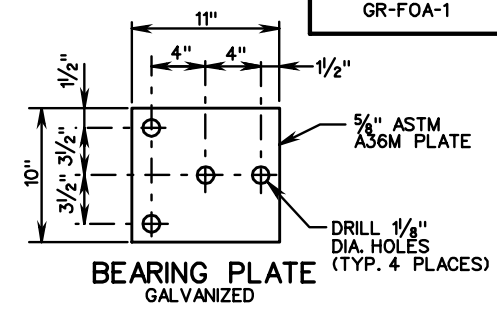


☆ CAN BE FIELD CUT AND BENT USING HEAT.

WOOD POSTS
RUBRAIL BLOCKOUTS
7" X 4" X THICKNESS



POST	THICKNESS
1	6 5/8"
2	5 1/16"
3	3 3/16"
4	2"

STEEL POSTS
RUBRAIL BLOCKOUTS
7" X 4" X THICKNESS


POST	THICKNESS
1	5"
2	3 13/16"
3	2 5/8"
4	1 1/16"



INDICATES EXTRA POST REQ'D. FOR
RUN-OFF FIXED OBJECT ATTACHMENT
ST'D. GR-FOA-1 TYPE II

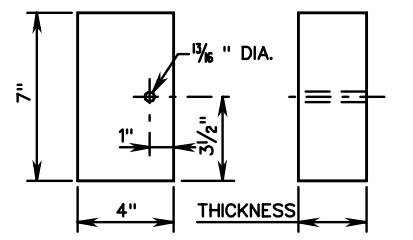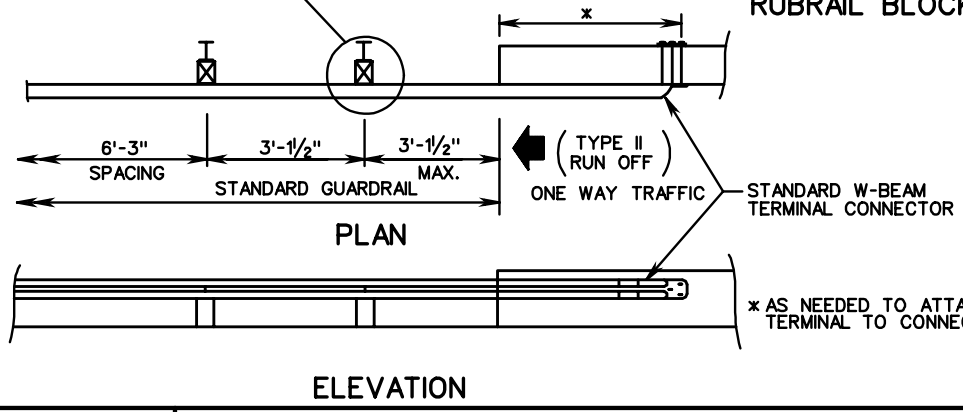

RUBRAIL BLOCKOUT DETAIL

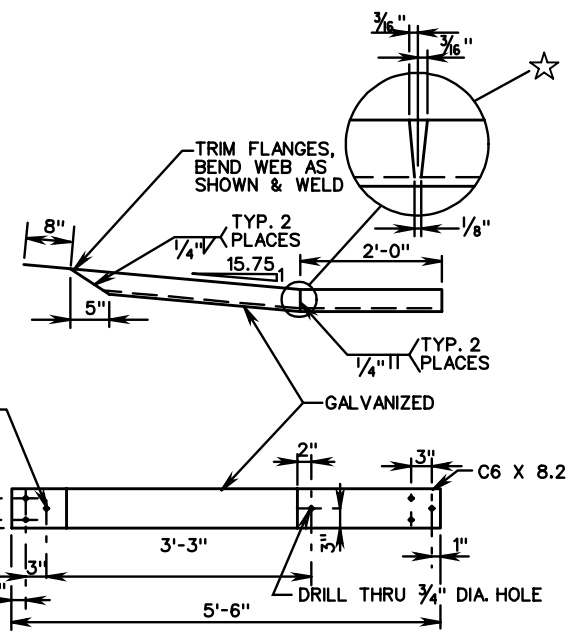



ITEM 8 DETAIL

SPECIFICATION REFERENCE
505


W-BEAM GUARDRAIL - FIXED OBJECT ATTACHMENT
(RUBRAIL AND HARDWARE DETAILS)
VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 3 OF 3
501.27	


GR-FOA-2

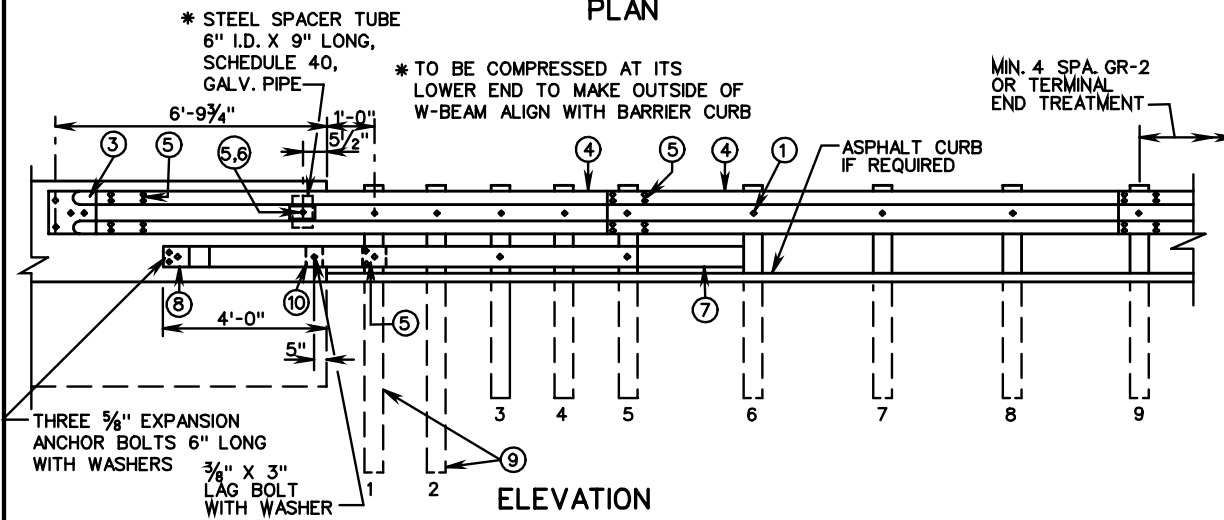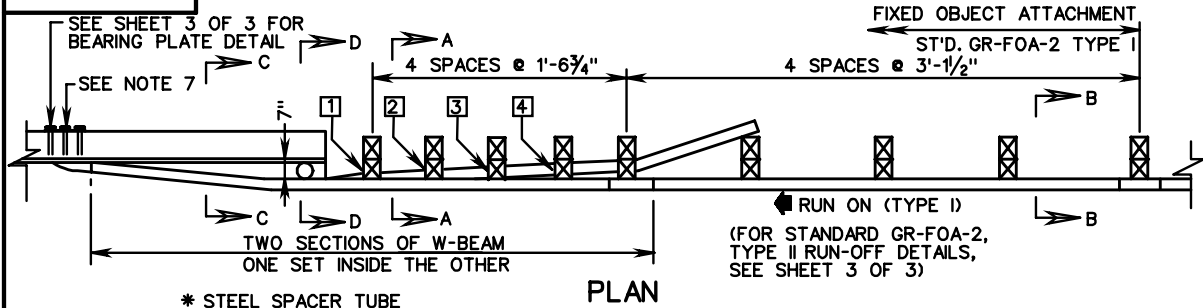

NOTE:
RUBRAIL MUST BE TWISTED 35° BETWEEN SECTION C-C AND D-D. SHOP FABRICATION MAY BE REQUIRED. RIGHT HAND AND LEFT HAND TWISTS WILL BE NECESSARY.

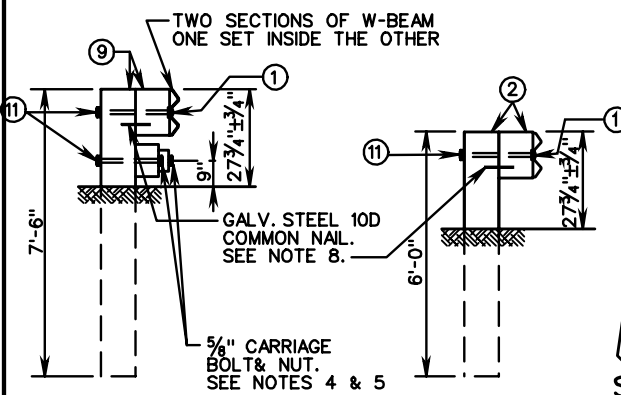


NEW BRIDGE - ATTACHMENTS
ONE-WAY TRAFFIC-RUN-ON, 2-GR-FOA-2, TYPE I
-RUN-OFF, 2-GR-FOA-2, TYPE II
TWO-WAY TRAFFIC-RUN-ON, 4-GR-FOA-2, TYPE I
EXISTING BRIDGE ATTACHMENTS AS SHOWN ON PLANS.

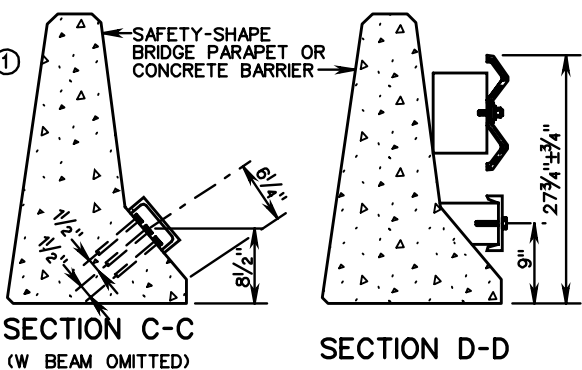

- NOTES:
1. FIXED OBJECTS MAY CONSIST OF SAFETY SHAPED BRIDGE PARAPETS OR CONCRETE BARRIERS.
 2. BRIDGE RAIL ENDS AND BRIDGE PARAPETS MUST BE OF ADEQUATE STRENGTH TO ACCEPT FULL IMPACT LOADING.
 3. GUARDRAIL COMPONENTS SHALL BE IN ACCORDANCE WITH VDOT ROAD AND BRIDGE STANDARDS.
 4. POSTS 1, 2, 3, 4, AND 5 REQUIRE AN ADDITIONAL HOLE TO ATTACH LOWER BLOCKS AND/OR RUBRAIL. RUBRAIL IS NOT BOLTED TO POSTS 2 AND 4.
 5. BOTTOM WOOD BLOCKS LOCATED ON POSTS 1 THROUGH 4 ARE CENTER DRILLED AND SECURED WITH 5/8" CARRIAGE BOLTS. (LENGTH AS REQUIRED).
 6. RUBRAIL MUST BE TWISTED 35° BETWEEN SECTION C-C AND D-D. SHOP FABRICATION MAY BE REQUIRED. RIGHT HAND AND LEFT HAND TWISTS WILL BE NECESSARY.
 7. APPROPRIATE LENGTH 7/8" ASTM A325 HEX BOLTS WITH WASHERS MUST BE USED WITH THRU DRILLED HOLES WITH A 5/8" BEARING PLATE ON THE BACK SIDE OF THE BRIDGE PARAPET OR CONCRETE BARRIER.
 8. DRIVE NAIL WITHIN 2" OF THE TOP OR BOTTOM OF BLOCKOUT AFTER 5/8" X 18 BOLT IS INSTALLED.
 9. SEE SHEET 3 OF 3 FOR RUBRAIL BLOCKOUT DETAILS.

ITEM	MATERIAL/SPECIFICATIONS/NOTES
①	5/8" X 18" LG. GUARDRAIL BOLT AND RECESSED NUT.
②	STANDARD 6" X 8" WOOD POST AND BLOCK.
③	STANDARD W-BEAM TERMINAL CONNECTOR
④	STANDARD W-BEAM RAIL
⑤	5/8" X 2" LONG GUARDRAIL BOLT AND RECESSED NUT (SEE STANDARD GR-HDW)
⑥	RECTANGULAR PLATE WASHER (SEE STANDARD GR-HDW)
⑦	BENT PLATE RUBRAIL (SEE SHEET 3 OF 3)
⑧	C6 X 8.2 RUBRAIL (SEE SHEET 3 OF 3)
⑨	8" X 8" X 7'-6" LONG WOOD POST AND 8" X 8" X 14" LONG TREATED PINE BLOCK OR RECYCLED MATERIAL
⑩	WOOD BLOCKOUT FOR RUBRAIL (SEE SHEET 3 OF 3)
⑪	WASHER FOR 5/8" BOLT

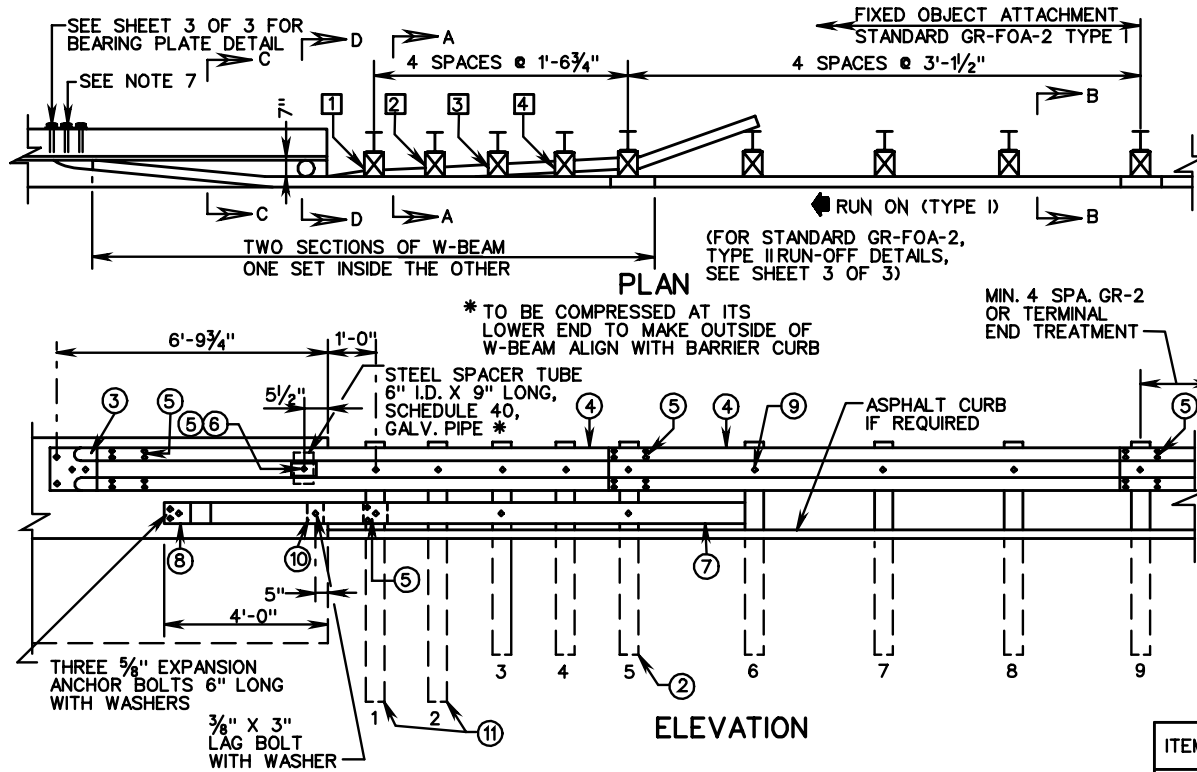


- NOTES:
1. FIXED OBJECTS MAY CONSIST OF SAFETY SHAPED BRIDGE PARAPETS OR CONCRETE BARRIERS.
 2. BRIDGE RAIL ENDS AND BRIDGE PARAPETS MUST BE OF ADEQUATE STRENGTH TO ACCEPT FULL IMPACT LOADING.
 3. GUARDRAIL COMPONENTS SHALL BE IN ACCORDANCE WITH VDOT ROAD AND BRIDGE STANDARDS.
 4. POSTS 1, 2, 3, 4, AND 5 REQUIRE AN ADDITIONAL HOLE TO ATTACH LOWER BLOCKS AND/OR RUBRAIL. RUBRAIL IS NOT BOLTED TO POSTS 2 AND 4.
 5. BOTTOM WOOD BLOCKS LOCATED ON POSTS 1 THROUGH 4 ARE CENTER DRILLED AND SECURED WITH 5/8" CARRIAGE BOLTS. (LENGTH AS REQUIRED).
 6. RUBRAIL MUST BE TWISTED 35° BETWEEN SECTIONS C-C AND D-D. SHOP FABRICATION MAY BE REQUIRED. RIGHT HAND AND LEFT HAND TWISTS WILL BE NECESSARY.
 7. APPROPRIATE LENGTH 7/8" ASTM A325 HEX BOLTS WITH WASHERS MUST BE USED WITH THRU DRILLED HOLES WITH A 5/8" BEARING PLATE ON THE BACK SIDE OF THE BRIDGE PARAPET OR CONCRETE BARRIER.
 8. SEE SHEET 3 OF 3 FOR RUBRAIL BLOCKOUT DETAILS.


NOTE:
RUBRAIL MUST BE TWISTED 35° BETWEEN SECTION C-C AND D-D. SHOP FABRICATION MAY BE REQUIRED. RIGHT HAND AND LEFT HAND TWISTS WILL BE NECESSARY.

NEW BRIDGE - ATTACHMENTS
ONE-WAY TRAFFIC-RUN-ON, 2-GR-FOA-2, TYPE I
-RUN-OFF, 2-GR-FOA-2, TYPE II
TWO-WAY TRAFFIC-RUN-ON, 4-GR-FOA-2, TYPE I
EXISTING BRIDGE ATTACHMENTS AS SHOWN ON PLANS.


TWO SECTIONS OF W-BEAM ONE SET INSIDE THE OTHER




SECTION A-A



SECTION B-B



SECTION C-C (W BEAM OMITTED)



SECTION D-D

ITEM	MATERIAL/SPECIFICATIONS/NOTES
①	WASHER FOR 5/8" BOLT
②	ST'D. W6 X 8.5 OR W6 X 9 STEEL POST W/ ST'D. 6" X 8" X 14" LG. TREATED PINE BLOCK OR RECYCLED MATERIAL
③	STANDARD W-BEAM TERMINAL CONNECTOR
④	STANDARD W-BEAM RAIL
⑤	5/8" X 2" LONG GUARDRAIL BOLT AND RECESSED NUT (SEE STANDARD GR-HDW)
⑥	RECTANGULAR PLATE WASHER (SEE STANDARD GR-HDW)
⑦	BENT PLATE RUBRAIL (SEE SHEET 3 OF 3)
⑧	C6 X 8.2 RUBRAIL (SEE SHEET 3 OF 3)
⑨	5/8" X 10" LG. HEX BOLT, NUT AND WASHER
⑩	WOOD BLOCKOUT FOR RUBRAIL (SEE SHEET 3 OF 3)
⑪	W8 X 13 X 7'-6" LG. STEEL POST WITH STD. 6" X 8" X 14" LG. TREATED PINE BLOCK OR RECYCLED MATERIAL.

SPECIFICATION REFERENCE

505

W-BEAM GUARDRAIL - FIXED OBJECT ATTACHMENT FOR USE WITH SAFETY SHAPE - (STEEL POSTS)

VIRGINIA DEPARTMENT OF TRANSPORTATION






VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE



SHEET 2 OF 3

501.29

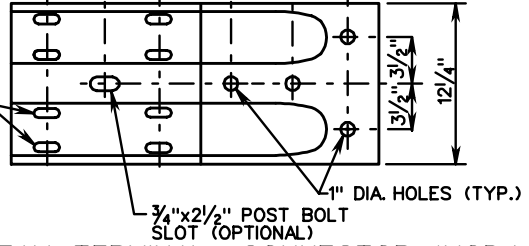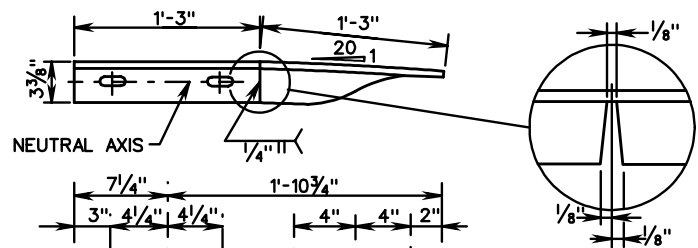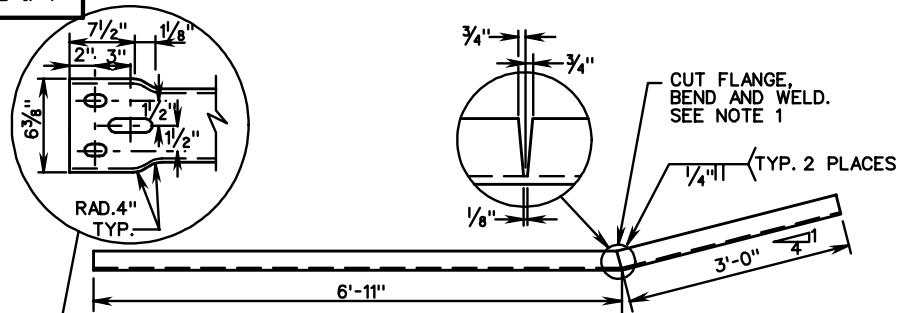


ITEM 7 DETAIL


W-BEAM TERMINAL CONNECTOR (MOD.)

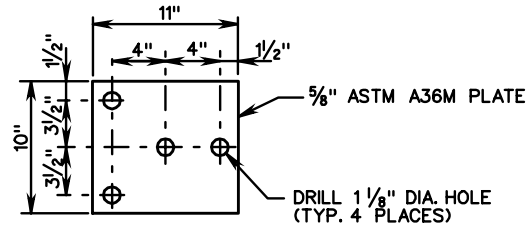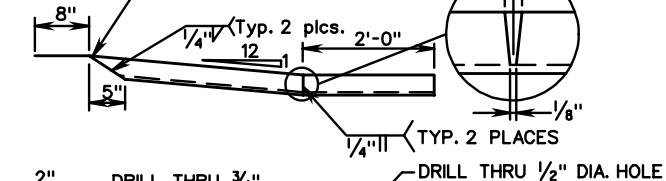


BEARING PLATE



ITEM 10 DETAIL

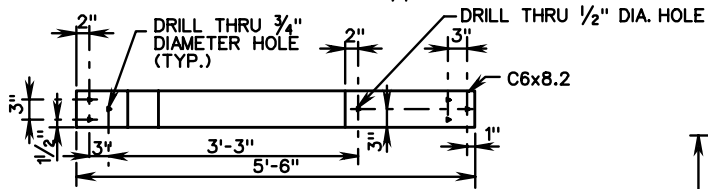


ITEM 8 DETAIL

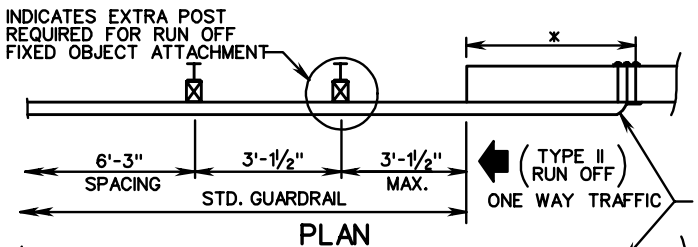

PLAN

ELEVATION

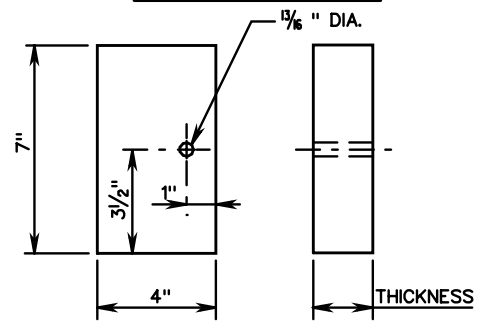

RUBRAIL BLOCKOUT DETAIL

STEEL POSTS
RUBRAIL BLOCKOUTS
7" X 4" X THICKNESS

WOOD POSTS
RUBRAIL BLOCKOUTS
7" X 4" X THICKNESS

POST	THICKNESS
1	4 1/4"
2	3 1/4"
3	2"
4	1"

POST	THICKNESS
1	6 1/4"
2	4 5/8"
3	3 1/8"
4	1 1/2"

STD. W-BEAM
TERMINAL
CONNECTOR

* AS NEEDED TO ATTACH W-BEAM
TERMINAL CONNECTOR.

NOTES:
1. CAN BE FIELD CUT AND BENT USING HEAT.
IF SHOP CUT AND BENT, RIGHT HAND OR LEFT
HAND MUST BE SPECIFIED DEPENDING ON WHICH
SIDE OF THE ROADWAY THE TRANSITION IS USED.



ROAD AND BRIDGE STANDARDS

W-BEAM GUARDRAIL - FIXED OBJECT ATTACHMENT

SPECIFICATION
REFERENCE

SHEET 3 OF 3


REVISION DATE

RUBRAIL AND HARDWARE DETAILS

505

501.30


VIRGINIA DEPARTMENT OF TRANSPORTATION

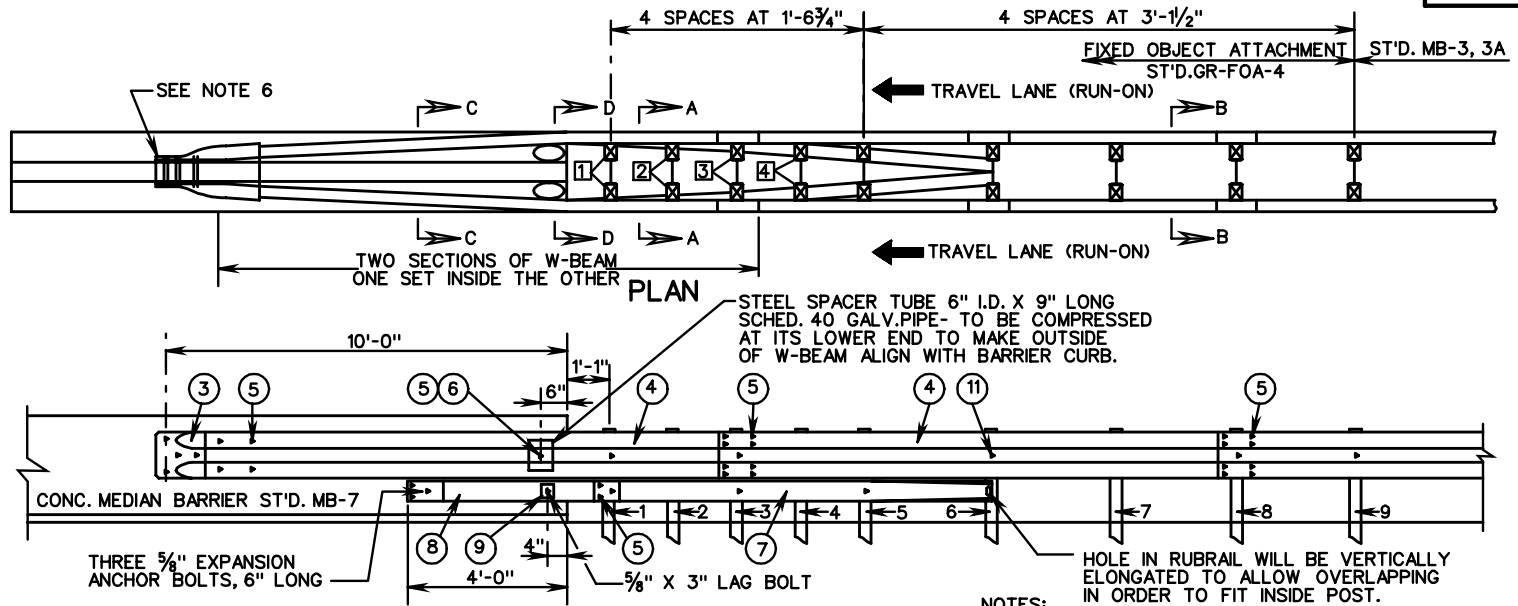


NOTE:
RUBRAIL MUST BE TWISTED 35° BETWEEN SECTIONS
C-C AND D-D. SHOP FABRICATION MAY BE REQUIRED.
RIGHT AND LEFT HAND TWISTS WILL BE REQUIRED.

NOTES:


1. ARE GUARDRAIL POSTS ARE TO BE STEEL.
2. ALL GUARDRAIL COMPONENTS ARE TO BE IN ACCORDANCE WITH VDOT ROAD AND BRIDGE STANDARDS.
3. POSTS 1, 2, 3, 4 AND 5 REQUIRE AN ADDITIONAL HOLE TO ATTACH LOWER BLOCKS AND/OR RUBRAIL. RUBRAIL IS NOT BOLTED TO POSTS 2 AND 4.
4. BOTTOM WOOD BLOCKS LOCATED ON POSTS 1 THROUGH 4 ARE TO BE DRILLED AND SECURED WITH 5/8" CARRIAGE BOLTS (LENGTH AS REQUIRED)
5. W-BEAM IS NOT BOLTED TO POSTS 2, 4, 5 AND 7. THESE BLOCKS ARE TO BE BOLTED DIRECTLY TO POSTS.
6. APPROPRIATE LENGTH 7/8" ASTM A325 HEX BOLTS ARE TO BE USED WITH HOLES DRILLED THROUGH THE CONCRETE MEDIAN BARRIER, ATTACHING THE W-BEAM TERMINAL CONNECTORS ON EACH SIDE.

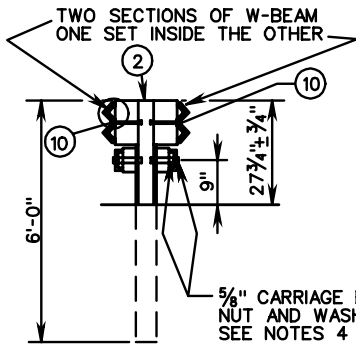


SECTION A-A
(ONE RAIL OMITTED)



SECTION B-B
(ONE RAIL OMITTED)



SECTION C-C
(W-BEAM OMITTED)



SECTION D-D

RUBRAIL WOOD BLOCKS 7" x 4"	
POST	THICKNESS
1	4 1/4"
2	3 1/4"
3	2"
4	1"

ITEM	MATERIALS/SPECIFICATIONS/NOTES	ITEM	MATERIALS/SPECIFICATIONS/NOTES
①	5/8" WASHER	⑥	RECTANGULAR PLATE WASHER (SEE STANDARD GR-HDW)
②	ST'D. W6 X 8.5 OR W6 X 9 STEEL POSTS, ST'D. 6" X 8" X 14" LONG TREATED PINE BLOCK OR RE-CYCLED MATERIAL.	⑦	BENT PLATE (SEE SHEET 2 OF 2)
③	ST'D. W-BEAM TERMINAL CONN. (MOD.)	⑧	C6 x 8.2 RUBRAIL (SEE SHEET 2 OF 2)
④	STANDARD W-BEAM RAIL	⑨	WOOD BLOCKOUT FOR RUBRAIL (SEE SHEET 2 OF 2)
⑤	5/8" X 2" LG. GUARDRAIL BOLT AND RECESSED NUT	⑩	5/8" x 10" LONG HEX BOLT WITH NUT

- TYPE I TWO RUN-ON SECTIONS (WITH 2 RUBRAILS SHOWN)
 TYPE II ONE RUN-ON SECTION WITH 1 RUBRAIL RETAINED
 ONE RUN-OFF SECTION (WITH 1 RUBRAIL REMOVED)
 TYPE III TWO RUN-OFF SECTIONS (WITH 2 RUBRAILS REMOVED)

SPECIFICATION REFERENCE

505

**BLOCKED-OUT W-BEAM MEDIAN
 BARRIER-FIXED OBJECT ATTACHMENT**
 (FOR USE BETWEEN STANDARD MB-7 AND STANDARD MB-3)
 VIRGINIA DEPARTMENT OF TRANSPORTATION


VDOT

ROAD AND BRIDGE STANDARDS


REVISION DATE

SHEET 1 OF 2

501.31

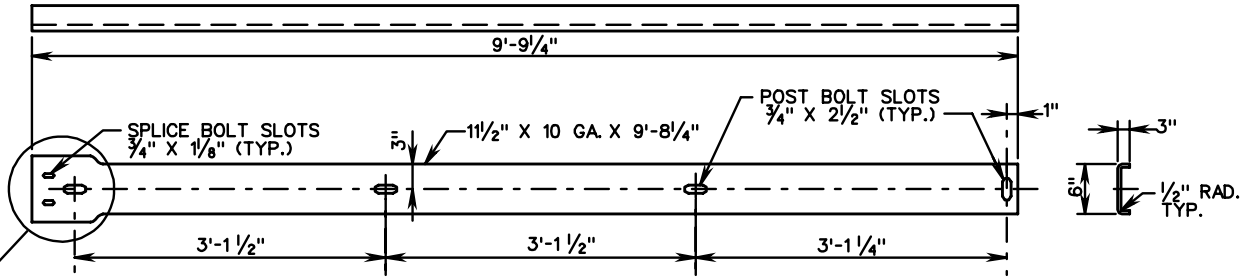


ITEM ⑦ DETAIL


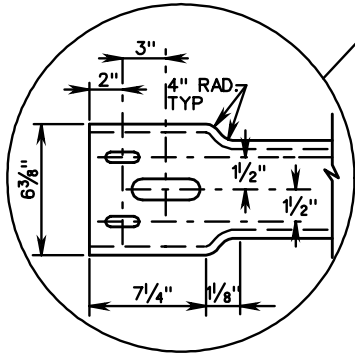


NOTES:


1. CAN BE FIELD CUT AND BENT USING HEAT. IF SHOP CUT AND BENT, RIGHT HAND OR LEFT HAND MUST BE SPECIFIED, DEPENDING ON WHICH SIDE OF THE ROADWAY THE TRANSITION IS USED.




ITEM ⑨ DETAIL

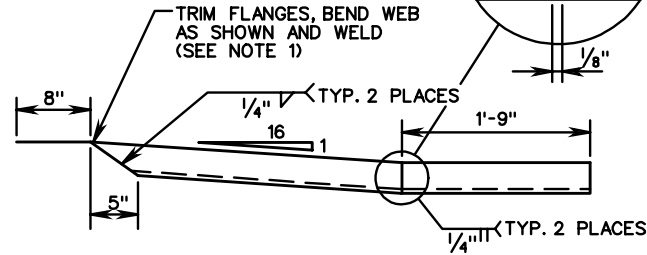

ITEM ⑧ DETAIL

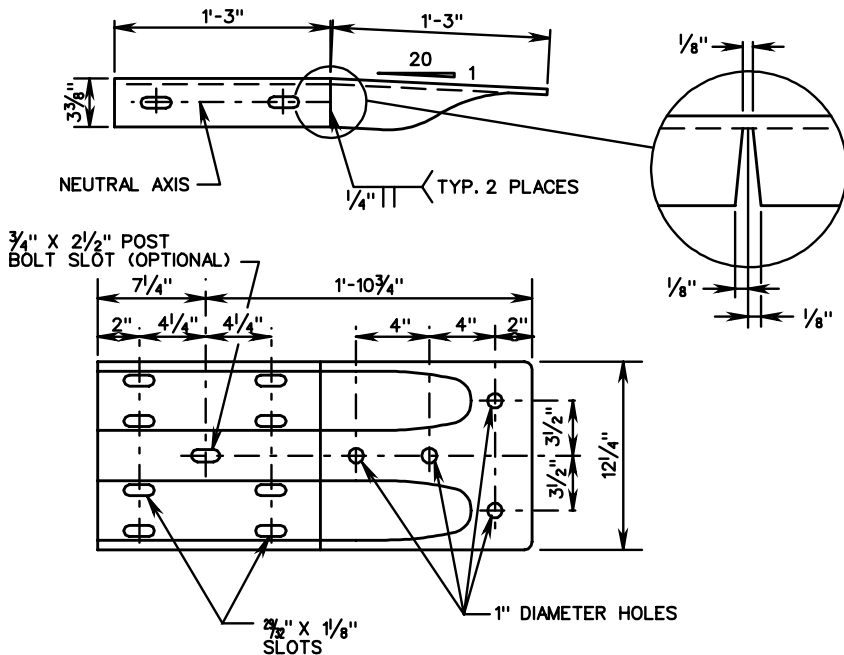

W BEAM TERMINAL CONNECTOR (MOD.)

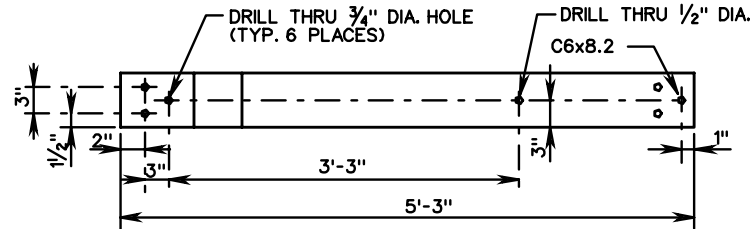

ROAD AND BRIDGE STANDARDS

**BLOCKED-OUT W-BEAM MEDIAN BARRIER
FIXED OBJECT ATTACHMENT**
(RUBRAIL AND HARDWARE DETAILS)
VIRGINIA DEPARTMENT OF TRANSPORTATION


SPECIFICATION
REFERENCE

SHEET 2 OF 2



REVISION DATE

505



501.32

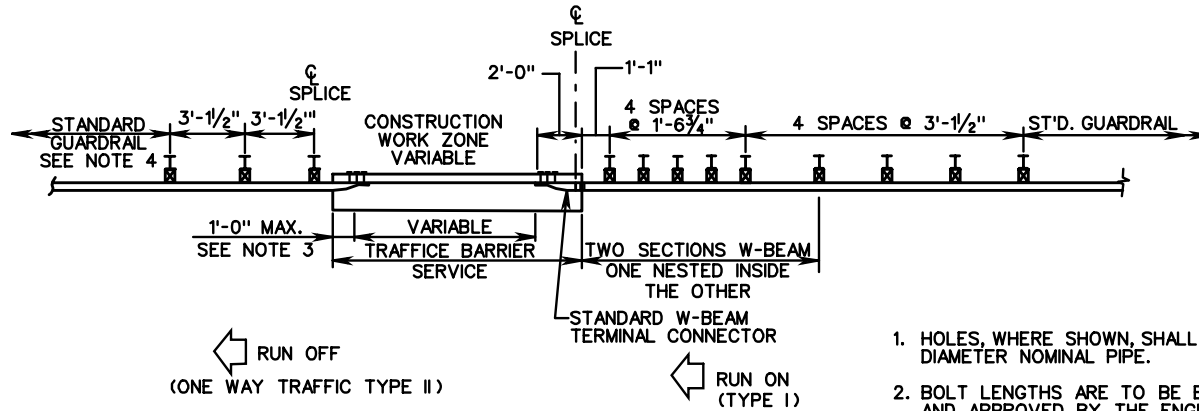

1. HOLES, WHERE SHOWN, SHALL BE FORMED WITH SLEEVES OF 1/2" DIAMETER NOMINAL PIPE.
2. BOLT LENGTHS ARE TO BE ESTABLISHED BY THE CONTRACTOR AND APPROVED BY THE ENGINEER. ALL BOLTS ARE TO BE 7/8" DIA. HEX HEAD MACHINE BOLTS WITH BEVELED WASHERS AND SELF-LOCKING NUTS.
3. FOR TWO-WAY TRAFFIC DESIGN, USE RUN-ON END TRANSITION (TYPE I).
4. RUN OFF (TYPE II) GUARDRAIL TO BE USED ONLY WHEN REQUIRED FOR OTHER REASONS.
5. COST OF TRANSITION TO BE INCLUDED IN PRICE BID PER FOOT OF TRAFFIC BARRIER SERVICE CONCRETE.
6. THESE INSTRUCTIONS APPLICABLE FOR TEMPORARY INSTALLATION IN CONSTRUCTION ZONES ONLY. REFER TO STANDARD GR-FOA FOR INSTRUCTIONS ON PERMANENT INSTALLATION.

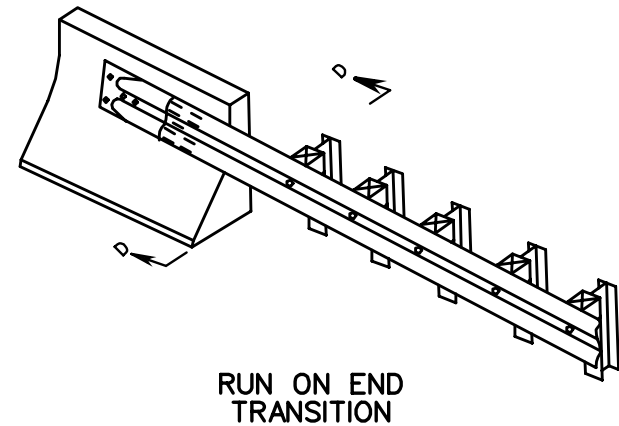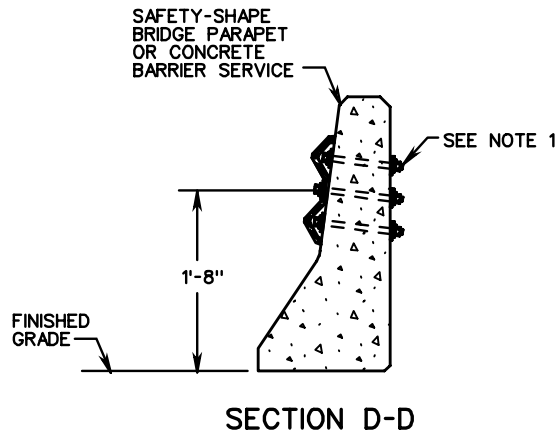


<p>SPECIFICATION REFERENCE</p>	<h2 style="margin: 0;">W-BEAM GUARDRAIL INSTALLATION CRITERIA</h2> <h3 style="margin: 0;">FIXED OBJECT ATTACHMENT METHODS FOR CONSTRUCTION ZONES</h3> <p style="margin: 0;">VIRGINIA DEPARTMENT OF TRANSPORTATION</p>	<p>VDOT</p> <p>ROAD AND BRIDGE STANDARDS</p>
<p>505</p>		<div style="width: 45%;"> <p>REVISION DATE</p> </div> <div style="width: 45%;"> <p>SHEET 1 OF 1</p> </div>
		<p>501.33</p>

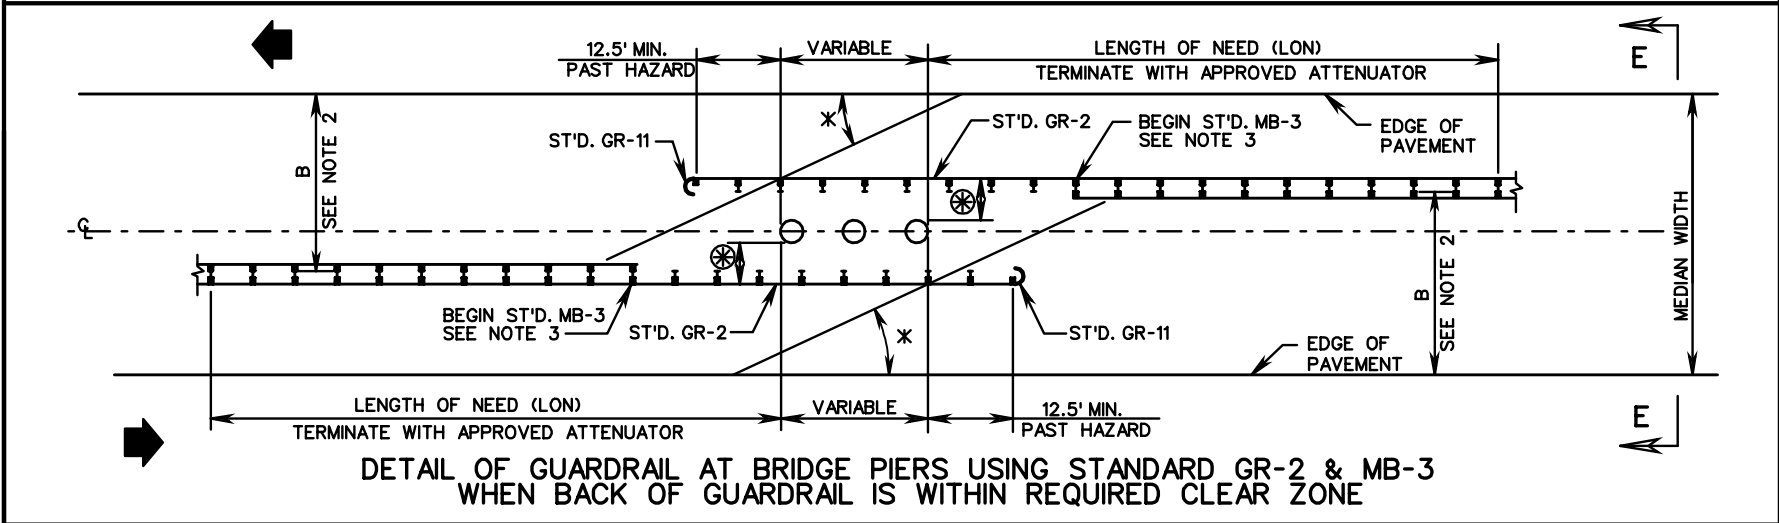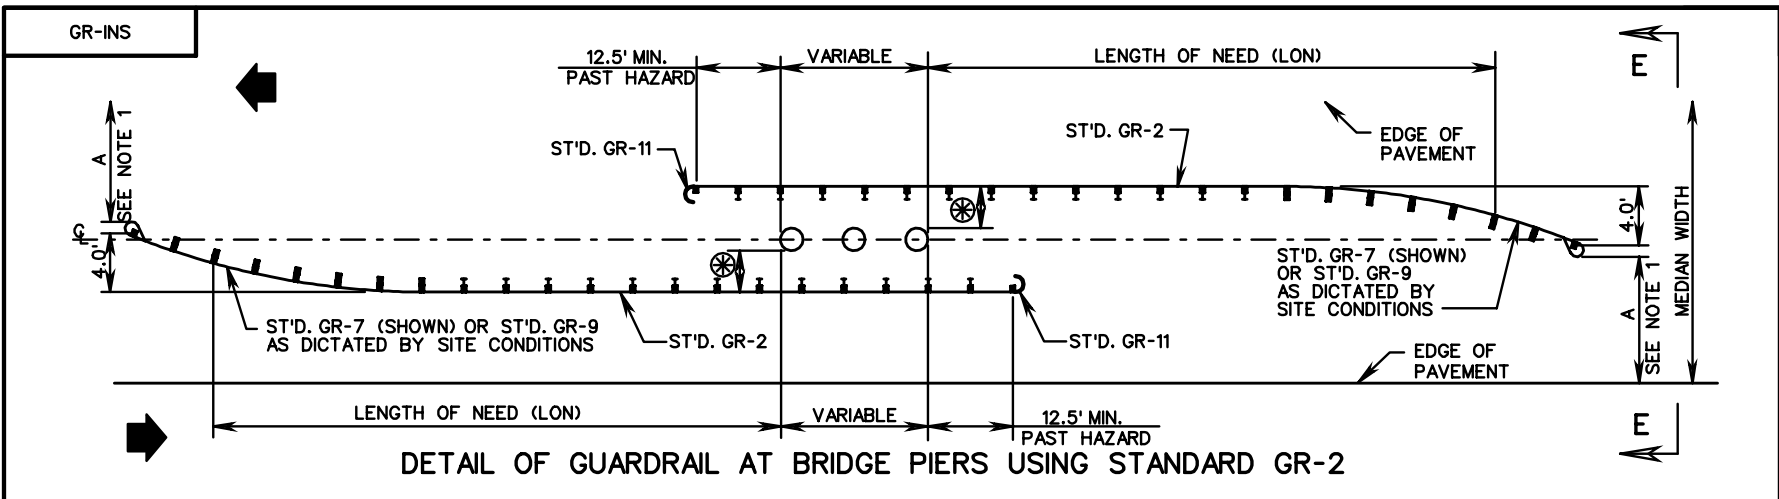

⊗ GUARDRAIL SHALL BE PLACED SO THAT A HAZARD IS NOT WITHIN THE DEFLECTION LIMIT OF THE GUARDRAIL. THE GUARDRAIL DESIGN AND PLACEMENT SHOWN ABOVE MAY ALSO BE USED FOR SHIELDING AN OVERHEAD SIGN SUPPORT, FIXED OBJECTS OR OTHER TYPES OF ROAD SIDE OBSTRUCTIONS.

* 25° ANGLE OF VEHICLE DEPARTURE.

- NOTES:
1. DISTANCE "A" MUST BE GREATER THAN REQ'D. CLEAR ZONE.
 2. DISTANCE "B" IS LESS THAN REQ'D. CLEAR ZONE.
 3. BEGIN ST'D MB-3 AT THE POST PRIOR TO THE POINT WHERE THE 25° ANGLE OF VEHICLE DEPARTURE WILL INTERSECT THE MB-3.

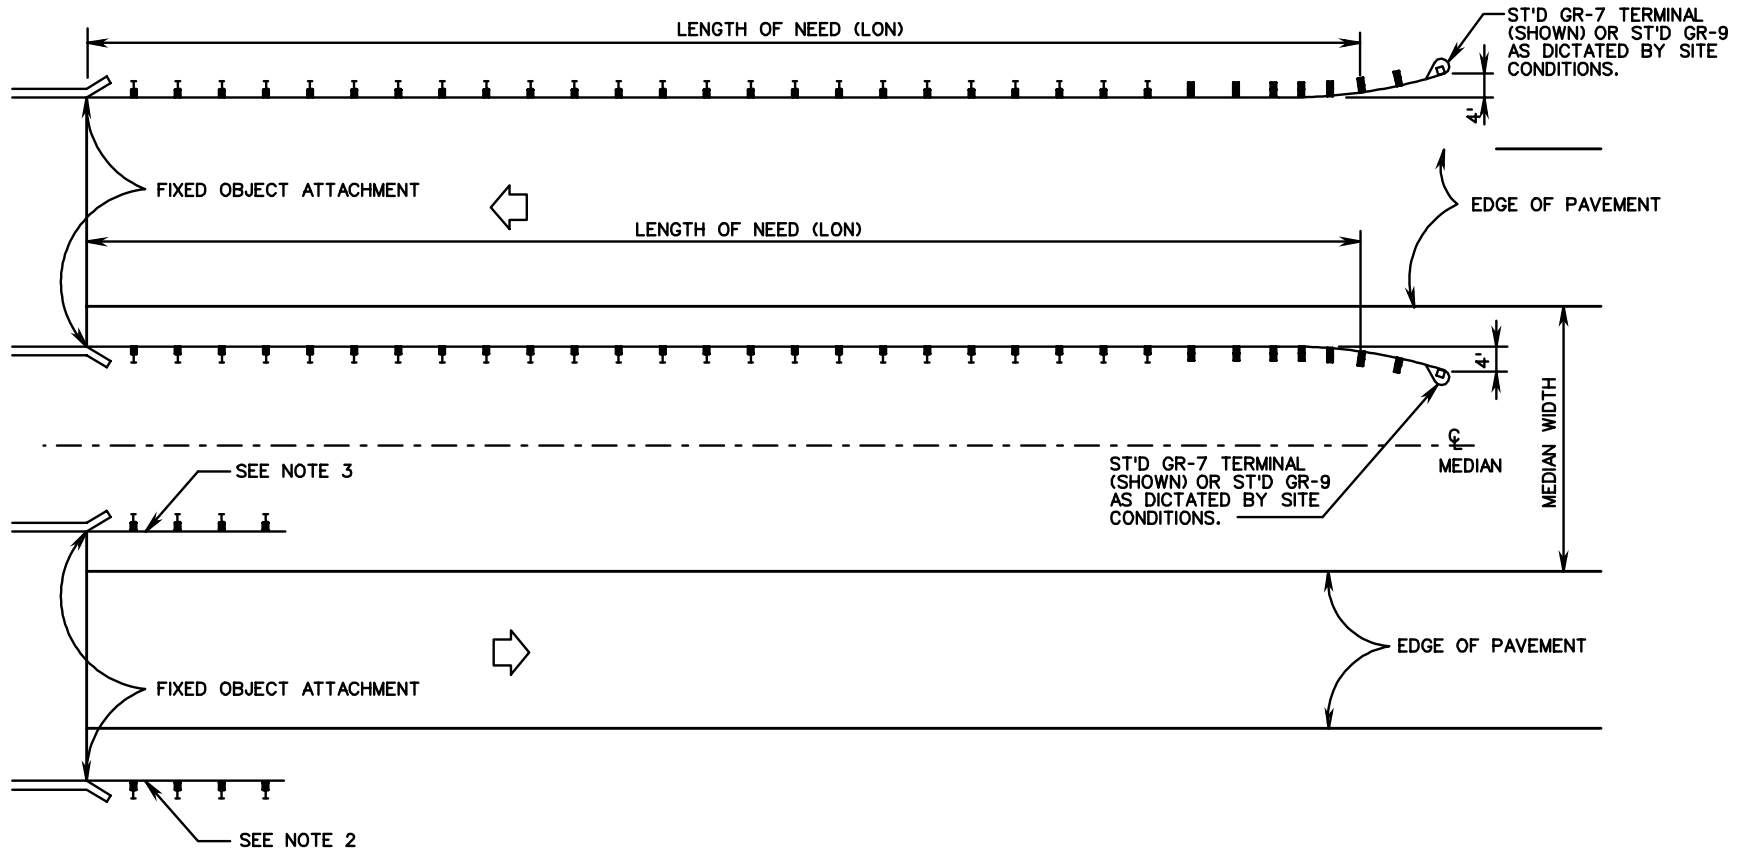


NOTES:

1. IF A CUT SECTION IS CLOSER THAN 200', A STANDARD GR-6 TERMINAL IS PREFERRED.
2. NO GUARDRAIL IS REQUIRED ON RUN-OFF UNLESS NEEDED TO SHIELD A HAZARD WITHIN THE REQUIRED CLEAR ZONE.
3. NO GUARDRAIL IS REQUIRED ON RUN-OFF UNLESS NEEDED TO SHIELD A HAZARD WITHIN THE REQUIRED CLEAR ZONE. REFER TO SHEET 501.34 IF BACK OF GUARDRAIL FROM THE OPPOSING LANES IS WITHIN THE REQUIRED CLEAR ZONE.


DETAIL OF GUARDRAIL AT DUAL BRIDGES

<p>SPECIFICATION REFERENCE</p>	<h2 style="margin: 0;">W-BEAM GUARDRAIL INSTALLATION CRITERIA</h2> <p style="margin: 0;">VIRGINIA DEPARTMENT OF TRANSPORTATION</p>	<p>VDOT</p> <p>ROAD AND BRIDGE STANDARDS</p>				
<p>221 505</p>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">REVISION DATE</td> <td style="width: 50%;">SHEET 2 OF 8</td> </tr> <tr> <td colspan="2" style="text-align: center;">501.35</td> </tr> </table>	REVISION DATE	SHEET 2 OF 8	501.35	
REVISION DATE	SHEET 2 OF 8					
501.35						


GR-INS

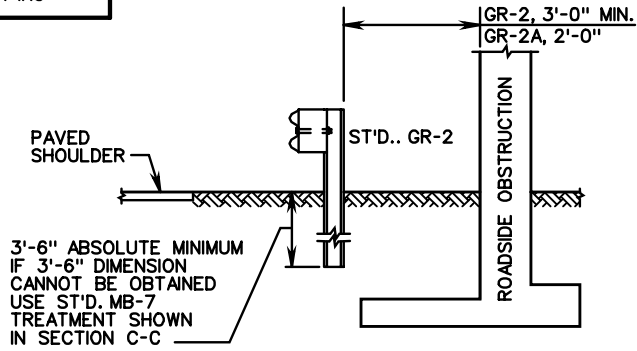



SECTION A-A

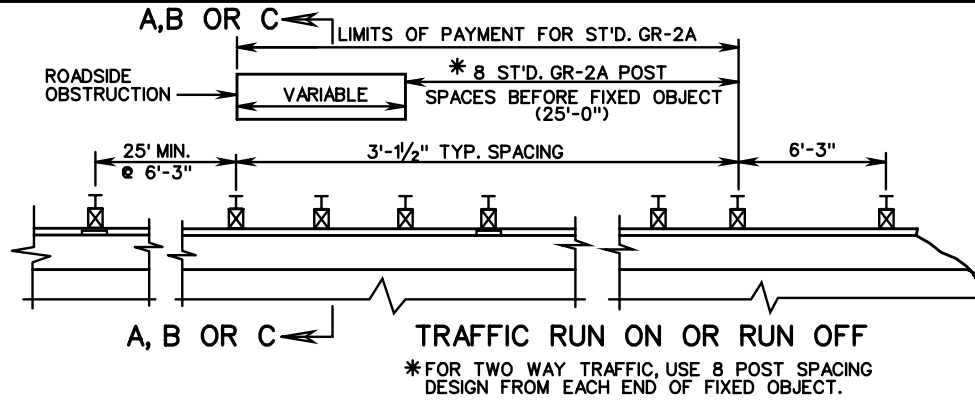

FOR USE WHERE DISTANCE FROM BACK OF GR-2A POST TO FIXED OBJECT IS LESS THAN 2'-0".

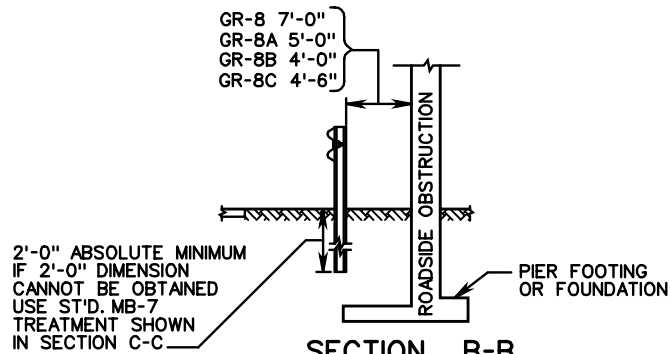


SECTION B-B

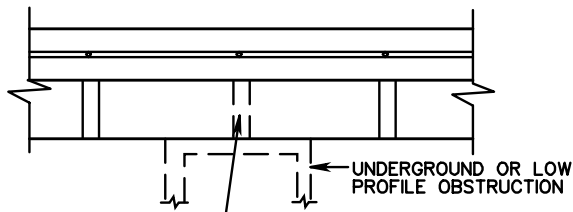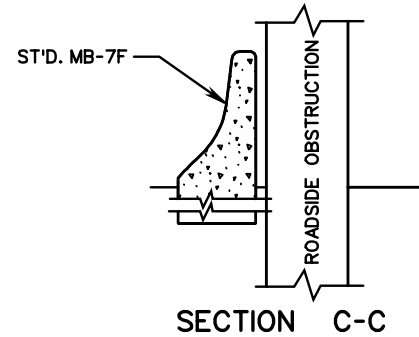

NOTE: IF GROUND LEVEL OR UNDERGROUND FIXED OBJECT NECESSITATES THE ELIMINATION OF ONE OR MORE POSTS, A GR-10 OR A SPECIAL DESIGN WILL BE REQUIRED


DETAIL OF SPECIAL DESIGN SITUATION

ONE OR MORE POSTS AS REQUIRED TO AVOID OBJECT

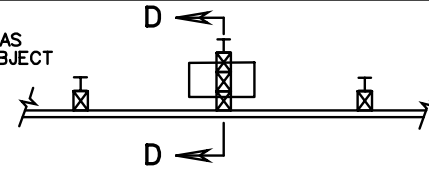

COST OF ADDITIONAL BLOCKOUT BRACKETS TO BE INCLUDED IN PRICE BID PER LINEAR FOOT OF GUARDRAIL.

3 BLOCKOUTS (MAX.) FOR ONE POST ONLY. TWO BLOCKOUTS MAY BE USED FOR A SERIES OF POSTS.

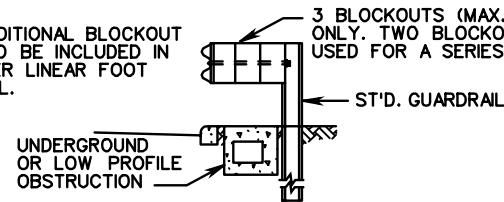

SECTION D-D
DETAIL OF MULTIPLE BLOCK-OUT TO AVOID UNDERGROUND OR LOW PROFILE OBSTRUCTION



ROAD AND BRIDGE STANDARDS

W BEAM GUARDRAIL INSTALLATION CRITERIA

SPECIFICATION REFERENCE

SHEET 3 OF 8

REVISION DATE

VIRGINIA DEPARTMENT OF TRANSPORTATION

501.36

221
505

NOTES:

GUARDRAIL INSTALLATION CRITERIA AS SHOWN ON THESE SHEETS IS TO APPLY TO THOSE LOCATIONS WHERE GUARDRAIL HAS TO BE TRANSITIONED FROM THE NORMAL LOCATION.


LENGTH OF TRANSITION (L) IS TO BE IN ACCORDANCE WITH TABLE III OR IV FOR APPLICABLE VALUES OF W OR AS DIRECTED BY THE ENGINEER.

RAIL TERMINAL SECTIONS IN ACCORDANCE WITH STANDARD GR-6, GR-7 OR GR-8 ARE TO BE INSTALLED AT EACH TERMINUS OF GUARDRAIL WHERE SPECIFIED ON PLANS.

ALL LENGTHS (L) ARE APPLIED ALONG FACE OF GUARDRAIL.

OFFSETS SHOWN IN TABLES ARE FOR 6'-3" SPACING. FOR 12'-6" SPACING (GR-8) USE EVERY SECOND VALUE FOR Y.

INSTALLATION METHODS SHOWN ON THESE SHEETS ARE APPLICABLE TO STANDARD PLANS GR-2, GR-2A AND GR-8.

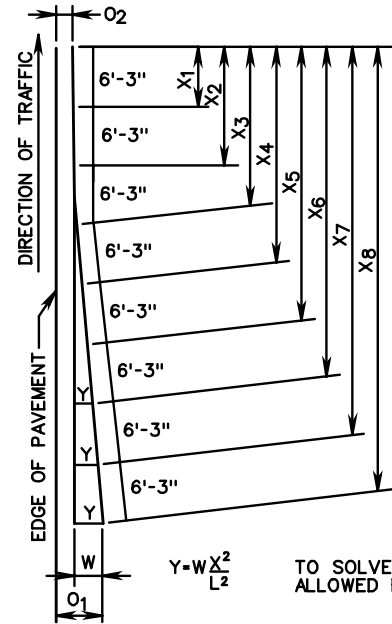

W = TOTAL LATERAL TRANSITION OF GUARDRAIL O1- O2
 O1 = OFFSET FROM EDGE OF PAVEMENT TO FACE OF GUARDRAIL MAX.
 O2 = OFFSET FROM EDGE OF PAVEMENT TO FACE OF GUARDRAIL MIN.
 X1 = ...Xn CUMULATIVE DISTANCE IN INCREMENTS OF 6'-3" FROM FIRST GUARDRAIL POST MEASURED ALONG FACE OF GUARDRAIL.
 Y = LATERAL OFFSET FROM FACE OF GUARDRAIL OF POST NEAREST TO PAVEMENT EDGE TO FACE OF GUARDRAIL AT EACH SUCCESSIVE POST.
 L = TOTAL LENGTH OF TRANSITIONAL PORTION OF GUARDRAIL.

TO SOLVE FOR "Y", USE THE MAXIMUM "L" ALLOWED FOR THE APPROPRIATE "W".

**TABLE III
 OFFSETS (Y) FOR INTRODUCED GUARDRAIL TRANSITIONS**

LENGTH L IN FEET	X IN FEET	W																		
		W-2'	W-3'	W-4'	W-5'	W-6'	W-7'	W-8'	W-9'	W-10'	W-11'	W-12'	W-13'	W-14'	W-15'	W-16'	W-17'	W-18'	W-19'	W-20'
37.50	X1 6.25	0.06	0.05	0.03	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03
	X2 12.50	0.22	0.19	0.11	0.08	0.06	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.10	0.11	0.12	0.13	0.13	0.13	0.14
	X3 18.75	0.50	0.42	0.25	0.18	0.14	0.11	0.12	0.14	0.16	0.17	0.19	0.20	0.22	0.23	0.25	0.27	0.28	0.30	0.31
	X4 25.00	0.89	0.75	0.44	0.31	0.24	0.19	0.22	0.25	0.28	0.31	0.33	0.36	0.39	0.42	0.44	0.47	0.50	0.53	0.56
	X5 31.25	1.39	1.17	0.69	0.49	0.38	0.30	0.35	0.39	0.43	0.48	0.52	0.56	0.61	0.65	0.69	0.74	0.78	0.82	0.87
	X6 37.50	2.00	1.69	1.00	0.70	0.54	0.44	0.50	0.56	0.62	0.69	0.75	0.81	0.87	0.94	1.00	1.06	1.13	1.19	1.25
50.00	X7 43.75		2.30	1.36	0.96	0.74	0.60	0.68	0.77	0.85	0.94	1.02	1.11	1.19	1.28	1.36	1.45	1.53	1.62	1.70
	X8 50.00		3.00	1.78	1.25	0.96	0.78	0.89	1.00	1.11	1.22	1.33	1.44	1.56	1.67	1.78	1.89	2.00	2.11	2.22
	X9 56.25			2.25	1.58	1.22	0.98	1.12	1.27	1.41	1.55	1.69	1.83	1.97	2.11	2.25	2.39	2.53	2.67	2.81
75.00	X10 62.50			2.78	1.95	1.50	1.22	1.39	1.56	1.74	1.91	2.08	2.26	2.43	2.60	2.78	2.95	3.13	3.30	3.47
	X11 68.75			3.36	2.36	1.82	1.47	1.68	1.89	2.10	2.31	2.52	2.73	2.94	3.15	3.36	3.57	3.78	3.99	4.20
	X12 75.00			4.00	2.81	2.16	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
87.50	X13 82.25				3.30	2.54	2.05	2.35	2.64	2.93	3.23	3.52	3.81	4.11	4.40	4.69	4.99	5.28	5.57	5.87
	X14 87.50				3.83	2.94	2.38	2.72	3.06	3.40	3.74	4.08	4.42	4.76	5.10	5.44	5.78	6.13	6.47	6.81
100.00	X15 93.75				4.39	3.38	2.73	3.12	3.52	3.91	4.30	4.69	5.08	5.47	5.86	6.25	6.64	7.03	7.42	7.81
	X16 100.00				5.00	3.84	3.11	3.56	4.00	4.44	4.89	5.33	5.78	6.22	6.67	7.11	7.56	8.00	8.44	8.89
	X17 106.25					4.33	3.51	4.01	4.52	5.02	5.52	6.02	6.52	7.02	7.53	8.03	8.53	9.03	9.53	10.03
125.00	X18 112.50					4.86	3.94	4.50	5.06	5.62	6.19	6.75	7.31	7.87	8.44	9.00	9.56	10.13	10.69	11.25
	X19 118.75					5.41	4.39	5.01	5.64	6.27	6.89	7.52	8.15	8.77	9.40	10.03	10.65	11.28	11.91	12.53
	X20 125.00					6.00	4.86	5.56	6.25	6.94	7.64	8.33	9.03	9.72	10.42	11.11	11.81	12.50	13.19	13.89
150.00	X21 131.25						5.36	6.12	6.89	7.66	8.42	9.19	9.95	10.72	11.48	12.25	13.02	13.78	14.55	15.31
	X22 137.50						5.88	6.72	7.56	8.40	9.24	10.08	10.92	11.76	12.60	13.44	14.28	15.13	15.97	16.81
	X23 143.75						6.43	7.35	8.27	9.18	10.10	11.02	11.94	12.86	13.78	14.69	15.61	16.53	17.45	18.37
	X24 150.00						7.00	8.00	9.00	10.00	11.00	12.00	13.00	14.00	15.00	16.00	17.00	18.00	19.00	20.00

SPECIFICATION REFERENCE

221
505

W-BEAM GUARDRAIL INSTALLATION CRITERIA

VIRGINIA DEPARTMENT OF TRANSPORTATION




ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 4 OF 8

501.37

GR-INS

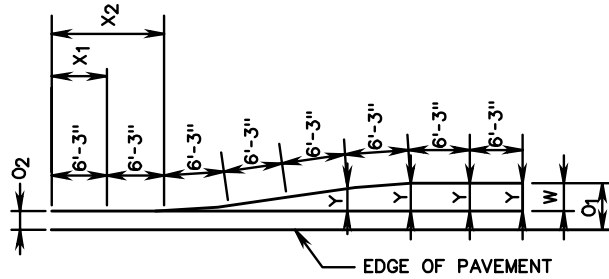

NOTE:
 GUARDRAIL INSTALLATION CRITERIA AS SHOWN ON THESE SHEETS IS TO APPLY TO THOSE LOCATIONS WHERE GUARDRAIL HAS TO BE TRANSITIONED FROM THE NORMAL LOCATION.

LENGTH OF TRANSITION (L) IS TO BE IN ACCORDANCE WITH TABLE III OR IV FOR APPLICABLE VALUES OF W OR AS DIRECTED BY THE ENGINEER.

RAIL TERMINAL SECTIONS IN ACCORDANCE WITH STANDARD GR-6, GR-7 OR GR-8 ARE TO BE INSTALLED AT EACH TERMINUS OF GUARDRAIL WHERE SPECIFIED ON PLANS.

ALL LENGTHS (L) ARE APPLIED ALONG FACE OF GUARDRAIL.

OFFSETS SHOWN IN TABLES ARE FOR 6'-3" SPACING, FOR 12'-6" SPACING (GR-8) USE EVERY SECOND VALUE OF Y.

INSTALLATION METHODS SHOWN ON THESE SHEETS ARE APPLICABLE TO STANDARD PLANS GR-2, GR-2A AND GR-8.

TABLE IV
OFFSETS (Y) FOR CONTINUOUS RUN-ON GUARDRAILS AND ALL RUN-OFF TRANSITIONS

LENGTH L IN FEET	X IN FEET	W-2'		W-3'		W-4'		W-5'		W-6'		W-7'		W-8'		W-9'		W-10'		W-11'		W-12'	
		RUN ON	RUN OFF	RUN ON	RUN OFF	RUN ON	RUN OFF	RUN ON	RUN OFF	RUN ON	RUN OFF	RUN ON	RUN OFF	RUN ON	RUN OFF	RUN ON	RUN OFF	RUN ON	RUN OFF	RUN ON	RUN OFF	RUN ON	RUN OFF
37.50	X ₁ 6.25	0.04	0.04	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.01	0.00	0.01	0.00	0.01	0.00	0.01	0.00	0.01	0.00	0.01
	X ₂ 12.50	0.30	0.30	0.19	0.19	0.03	0.03	0.02	0.04	0.01	0.05	0.01	0.05	0.01	0.06	0.01	0.07	0.01	0.08	0.01	0.09	0.01	0.09
	X ₃ 18.75	1.00	1.00	0.63	0.63	0.11	0.11	0.07	0.13	0.05	0.16	0.03	0.18	0.03	0.21	0.03	0.24	0.03	0.26	0.04	0.29	0.04	0.32
	X ₄ 25.00	1.70	1.70	1.50	1.50	0.25	0.25	0.16	0.31	0.11	0.38	0.08	0.44	0.06	0.50	0.07	0.56	0.08	0.63	0.09	0.69	0.09	0.75
	X ₅ 31.25	1.96	1.96	2.37	2.37	0.49	0.49	0.31	0.61	0.22	0.73	0.16	0.85	0.12	0.98	0.14	1.10	0.15	1.22	0.17	1.34	0.18	1.46
	X ₆ 37.50	2.00	2.00	2.81	2.81	0.84	0.84	0.54	1.05	0.38	1.27	0.28	1.48	0.21	1.69	0.24	1.90	0.26	2.11	0.29	2.32	0.32	2.53
50.00	X ₇ 43.75			2.98	2.98	1.34	1.34	0.86	1.67	0.60	2.01	0.44	2.34	0.33	2.68	0.38	3.01	0.42	3.35	0.46	3.68	0.50	4.02
	X ₈ 50.00			3.00	3.00	2.00	2.00	1.28	2.50	0.89	3.00	0.65	3.50	0.50	4.00	0.56	4.50	0.63	5.00	0.69	5.50	0.75	6.00
100.00	X ₉ 56.25					2.66	2.66	1.82	3.33	1.27	3.99	0.93	4.66	0.71	5.32	0.80	5.99	0.89	6.65	0.98	7.32	1.07	7.98
	X ₁₀ 62.50					3.16	3.16	2.50	3.95	1.74	4.73	1.28	5.52	0.98	6.31	1.10	7.10	1.22	7.89	1.34	8.68	1.46	9.47
	X ₁₁ 68.75					3.51	3.51	3.18	4.39	2.31	5.27	1.70	6.15	1.30	7.02	1.46	7.90	1.62	8.78	1.79	9.66	1.95	10.54
	X ₁₂ 75.00					3.75	3.75	3.72	4.69	3.00	5.63	2.20	6.56	1.69	7.50	1.90	8.44	2.11	9.38	2.32	10.31	2.53	11.25
	X ₁₃ 81.25					3.89	3.89	4.14	4.87	3.69	5.84	2.80	6.82	2.15	7.79	2.41	8.76	2.68	9.74	2.95	10.71	3.22	11.68
	X ₁₄ 87.50					3.97	3.97	4.46	4.96	4.26	5.95	3.50	6.95	2.68	7.94	3.01	8.93	3.35	9.92	3.68	10.91	4.02	11.91
	X ₁₅ 93.75					4.00	4.00	4.69	5.00	4.73	5.99	4.20	6.99	3.30	7.99	3.71	8.99	4.12	9.99	4.53	10.99	4.94	11.99
	X ₁₆ 100.00					4.00	4.00	4.84	5.00	5.11	6.00	4.80	7.00	4.00	8.00	4.50	9.00	5.00	10.00	5.50	11.00	6.00	12.00
125.00	X ₁₇ 106.25							4.93	5.40		5.30		4.70		5.29		5.88		6.47		7.06		
	X ₁₈ 112.50							4.98	5.63		5.72		5.32		5.99		6.65		7.32		7.98		
	X ₁₉ 118.75							5.00	5.78		6.07		5.85		6.59		7.32		8.05		8.78		
	X ₂₀ 125.00							5.00	5.89		6.35		6.31		7.10		7.89		8.68		9.47		
150.00	X ₂₁ 131.25								5.95		6.56		6.70		7.54		8.38		9.21		10.05		
	X ₂₂ 137.50								5.99		6.72		7.02		7.90		8.78		9.66		10.54		
	X ₂₃ 143.75								6.00		6.84		7.29		8.20		9.11		10.02		10.93		
	X ₂₄ 150.00								6.00		6.92		7.50		8.44		9.38		10.31		11.25		
175.00	X ₂₅ 156.25										6.97		7.67		8.62		9.58		10.54		11.50		
	X ₂₆ 162.50										6.99		7.79		8.76		9.74		10.71		11.68		
	X ₂₇ 168.75										7.00		7.88		8.86		9.85		10.83		11.82		
	X ₂₈ 175.00										7.00		7.94		8.93		9.92		10.91		11.91		
200.00	X ₂₉ 181.25												7.97		8.97		9.97		10.96		11.96		
	X ₃₀ 187.50												7.99		8.99		9.99		10.99		11.99		
	X ₃₁ 193.75												8.00		9.00		10.00		11.00		12.00		
	X ₃₂ 200.00												8.00		9.00		10.00		11.00		12.00		



ROAD AND BRIDGE STANDARDS

SHEET 5 OF 8

REVISION DATE

501.38

W-BEAM GUARDRAIL INSTALLATION CRITERIA

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

221
505

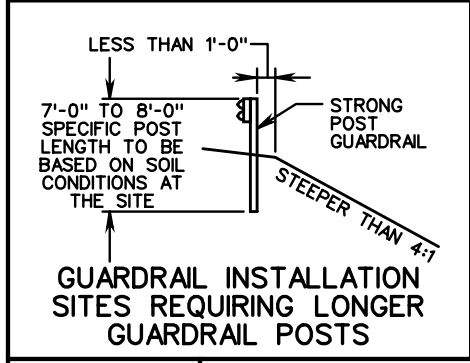
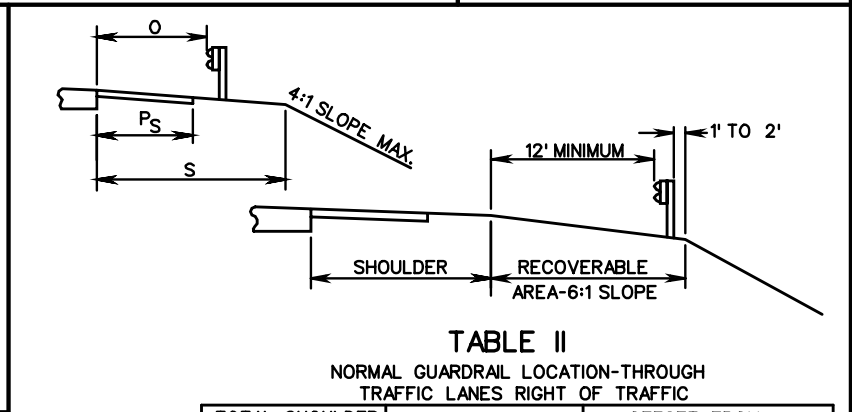
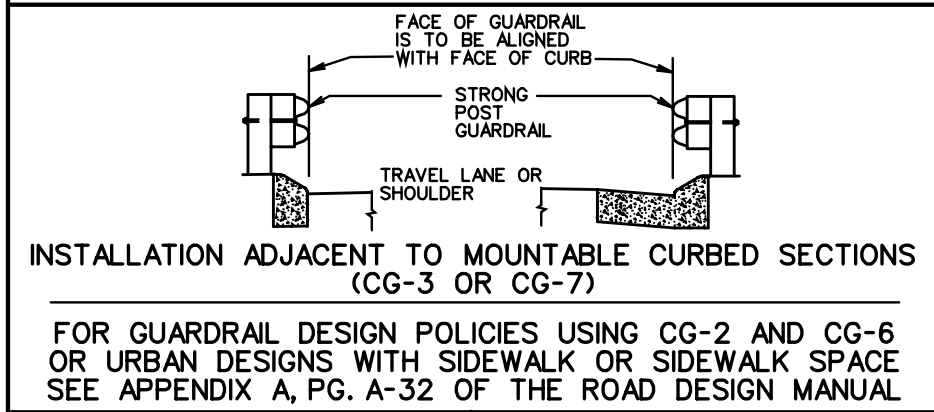
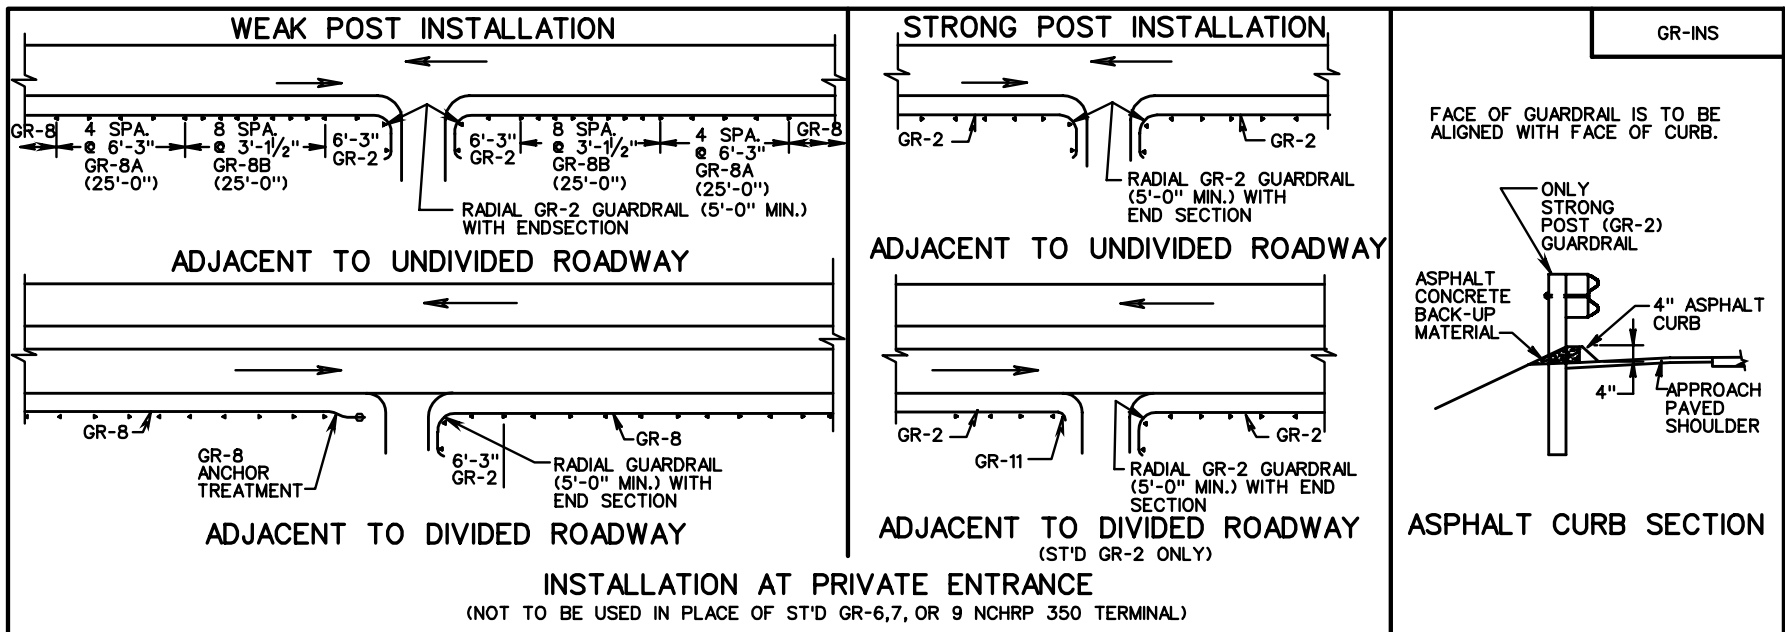


TABLE I
NORMAL GUARDRAIL LOCATION-THROUGH TRAFFIC LANES LEFT OF TRAFFIC

TOTAL SHOULDER WIDTH (S) (PAVED & GRADING)	PAVED SHOULDER WIDTH (P _S)	OFFSET FROM EDGE OF PAVEMENT TO FACE OF GUARDRAIL (O)
17'	12'	14'
15'	3', 4', OR 10'	12'
13'	3'	10'
11'	3'	8'
8' (MED.)	3' or 4'	5'

TABLE II
NORMAL GUARDRAIL LOCATION-THROUGH TRAFFIC LANES RIGHT OF TRAFFIC

TOTAL SHOULDER WIDTH (S) (PAVED & GRADING)	PAVED SHOULDER WIDTH (P _S)	OFFSET FROM EDGE OF PAVEMENT TO FACE OF GUARDRAIL (O)
17'	12'	14'
15'	6' or 10'	12'
13'	8'	10'
11'	0, 3', 4' or 6'	8'
9'	0, 3' or 4'	6'
8'	3'	5'
5'	0	2'

SPECIFICATION REFERENCE

221
505

W-BEAM GUARDRAIL INSTALLATION CRITERIA





VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT
ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 6 OF 8


501.39

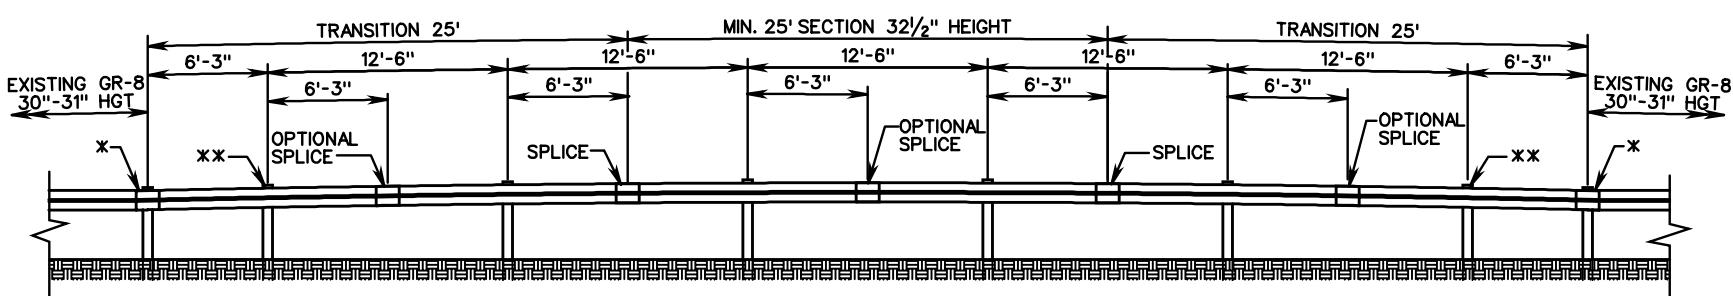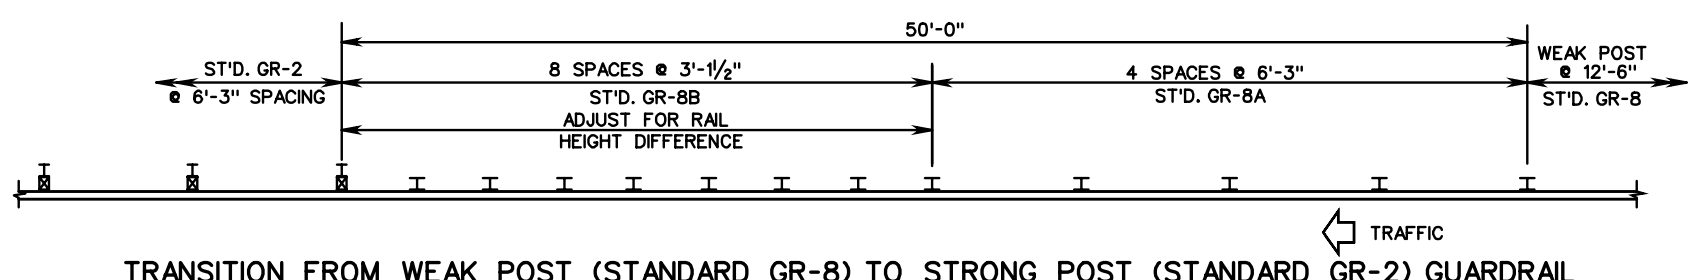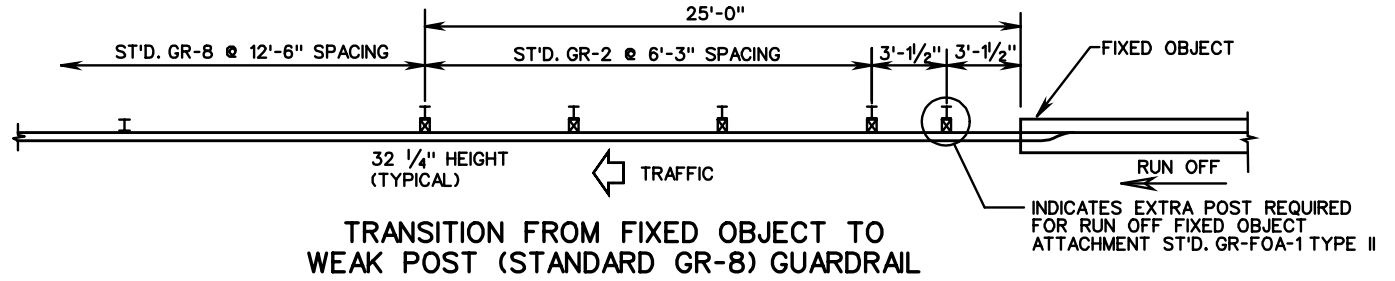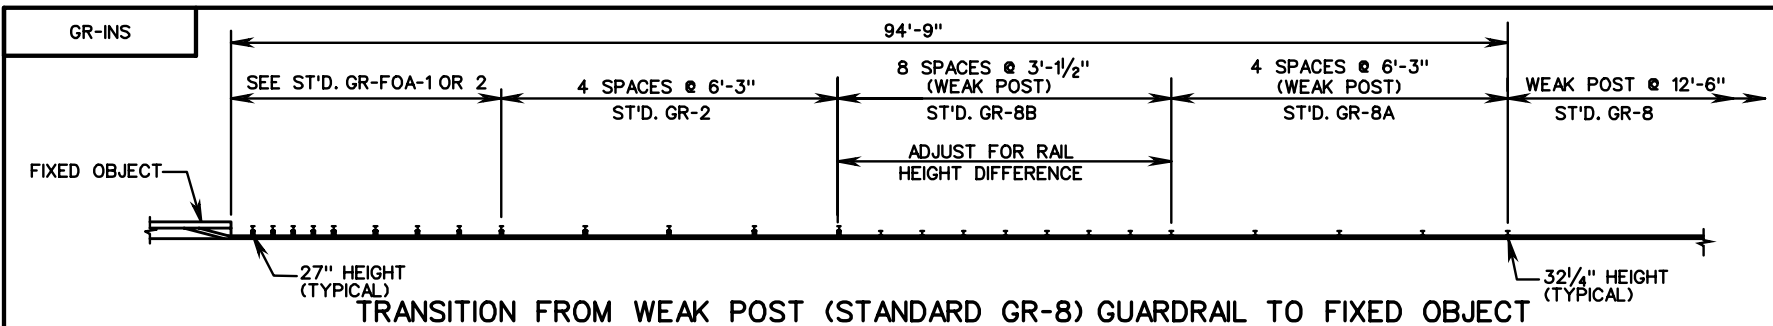


* PLACE A SPLICE AT THE LAST POST OF THE EXISTING GR-8. THEN USE A 25 FT. TRANSITION SECTION OF RAIL TO ANOTHER SPLICE. THIS WILL RAISE THE GUARDRAIL HEIGHT FROM THE OLD GR-8 (30"-31") TO THE NEW GR-8 (32 1/4").

** IN ORDER TO GET SPLICES AS PER THE NEW GR-8, A POST IS TO BE ADDED AT 6'-3" AFTER THE EXISTING GR-8.


TRANSITION FROM WEAK POST (EXISTING GR-8 30"-31" HEIGHT) TO CURRENT NCHRP 350 TL-3 WEAK POST (STANDARD GR-8 32 1/4" HEIGHT)

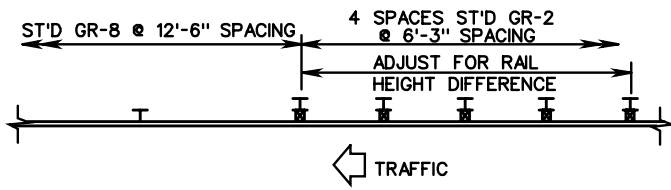


TRANSITION FROM STRONG POST TO WEAK POST GUARDRAIL

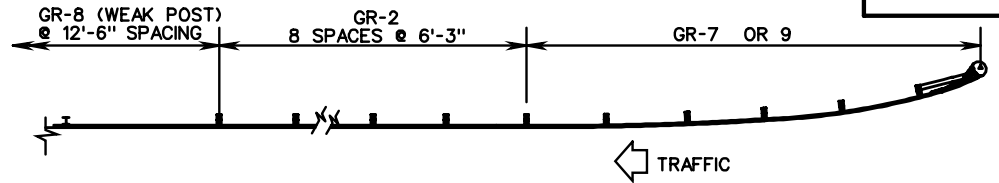


TRANSITION FROM GR-7 & GR-9 TERMINAL TO WEAK POST GUARDRAIL

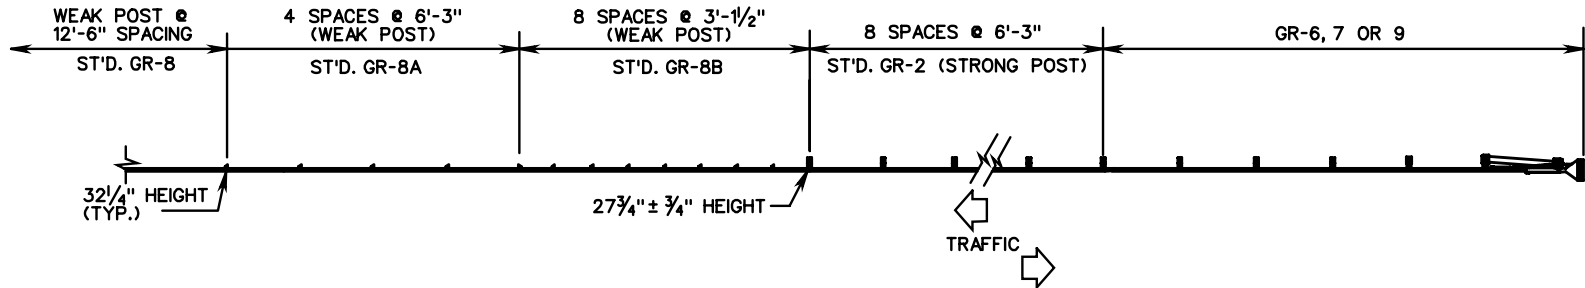

TRANSITION FROM GR-6, GR-7, OR GR-9 TERMINAL TO WEAK POST GUARDRAIL

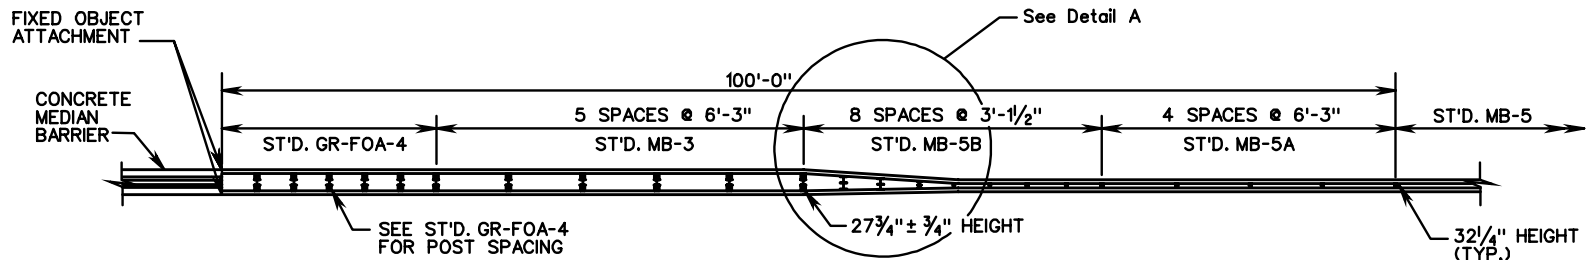

TRANSITION FROM WEAK POST MEDIAN BARRIER TO CONCRETE MEDIAN BARRIER

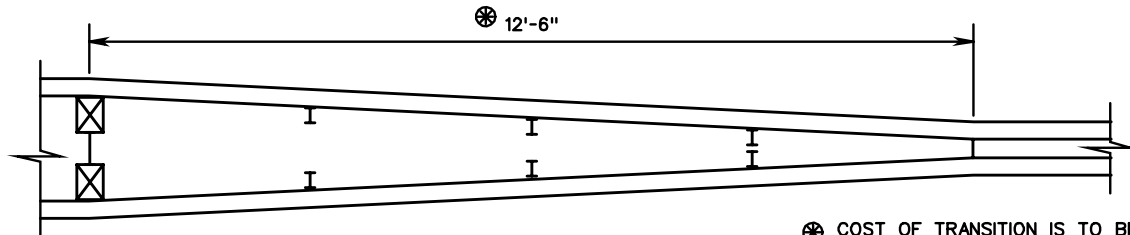

DETAIL A

⊛ COST OF TRANSITION IS TO BE INCLUDED IN PRICE BID FOR ST'D. MB-5B MEDIAN BARRIER.

SPECIFICATION REFERENCE
221 505

W-BEAM GUARDRAIL AND MEDIAN BARRIER INSTALLATION CRITERIA

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 8 OF 8
	501.41

MB-3

1/2" (+1/4") CHAMFER ALL CORNERS

ALL CONCRETE SHALL BE CLASS A3.


3/4" HOLES TO BE CAST IN POST.

5/8" X 26" BOLT
6" X 8" X 1'-2" TREATED PINE BLOCK OR RECYCLED MATERIAL

4 #4 DEFORMED REINF. BARS 4" LESS THAN HEIGHT OF POST


CHAMFER MAY BE EXTENDED ENTIRE LENGTH OF POST AT THE OPTION OF THE FABRICATOR.

DIMENSIONS SHOWN IN PARENTHESIS INDICATE ACCEPTABLE TOLERANCES.

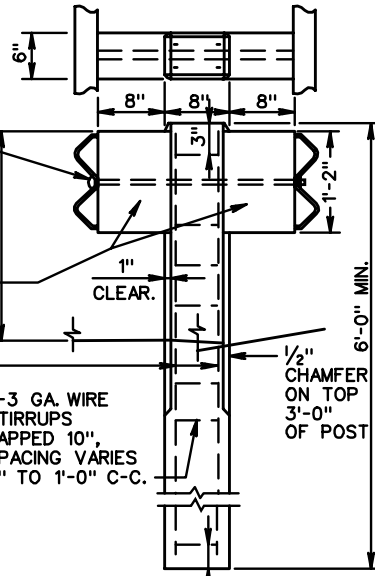


CONCRETE POST


POST MAY BE HOT ROLLED OR WELDED

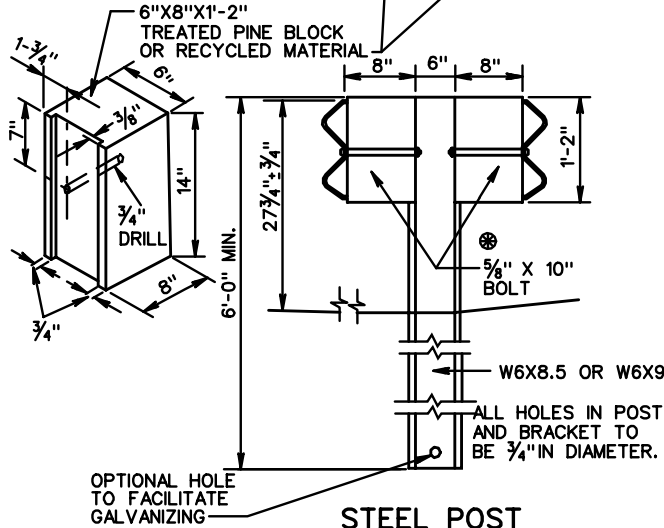

STEEL POST

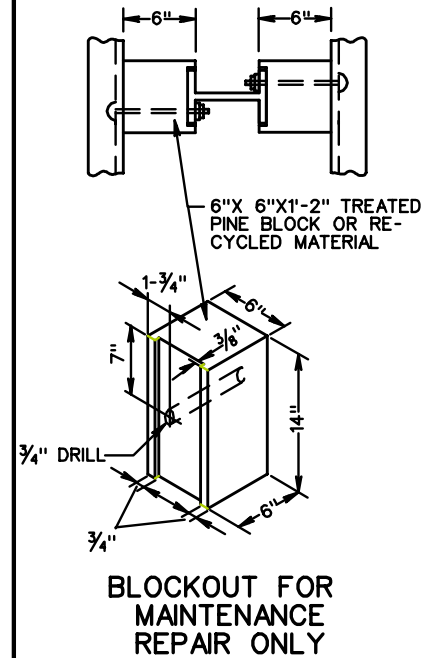

BLOCKOUT FOR MAINTENANCE REPAIR ONLY

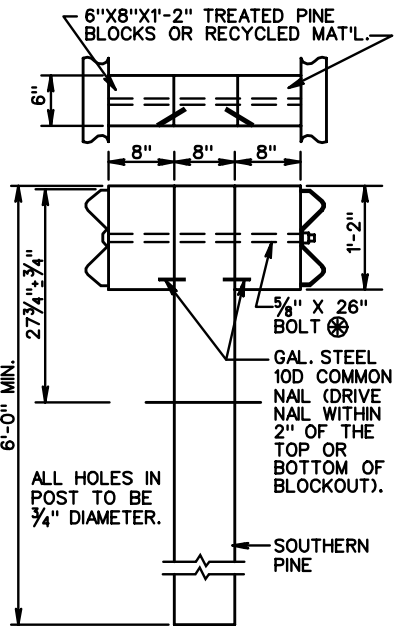

6X8 WOOD POST

NOTES:

STANDARD MB-3 POST SPACING IS 6'-3".

FOR DETAILS OF RAIL ELEMENT, RAIL SPLICE JOINT, W BEAM BACK UP PLATE, AND ASSOCIATED HARDWARE SEE SHEET NO. 501.01.

ALTERNATE TYPE POSTS AND BLOCKOUTS MAY BE INTERCHANGED ON ANY ONE PROJECT WITH THE RESTRICTION THAT THE SAME TYPE OF POST AND BLOCKOUT MUST BE USED IN ANY SINGLE RUN OF MEDIAN BARRIER.


ALL BOLTS, NUTS, WASHERS, STEEL POSTS, BENT PLATE POST, AND BLOCKOUTS ARE TO BE GALVANIZED.

THE GUARDRAIL AND MEDIAN BARRIER COMPONENTS DEPICTED IN A.R.T.B.A. TECHNICAL BULLETIN NUMBER 268B MAY BE SUBSTITUTED IF INTERCHANGEABLE WITH THE STANDARDS FOR GUARDRAIL (GR) OR MEDIAN BARRIER (MB) AND APPROVED BY THE ENGINEER.

⊗ STANDARD WASHERS ARE TO BE USED ON LAST 50' OF RUN OFF END ONLY.

FLARE RATES			
DESIGN SPEED	INSIDE SHY LINE	BEYOND SHY LINE	
MPH	SHY LINE LS	FLARE RATE	FLARE RATE
70	10'	30:1	15:1 *
60	8'	26:1	14:1 *
50	6.6'	21:1	11:1 *
40	5'	17:1	8:1 *
30	3.6'	13:1	7:1 *

* SUGGESTED MAXIMUM FLARE RATE FOR SEMI-RIGID BARRIER SYSTEMS.

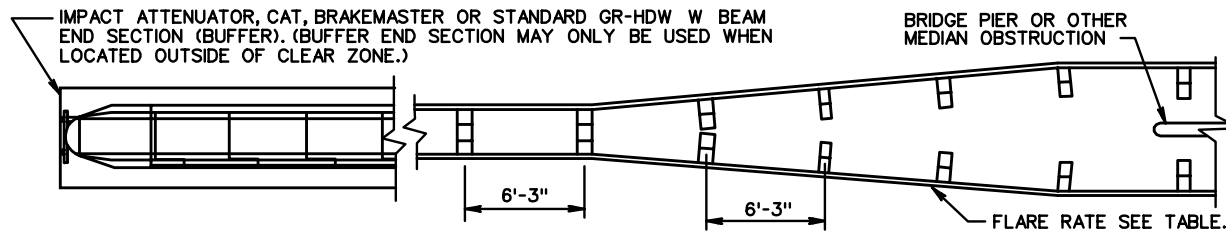

METHOD OF TREATMENT AT BRIDGE PIER OR MEDIAN OBSTRUCTION



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE


502.01

BLOCKED-OUT W-BEAM MEDIAN BARRIER

VIRGINIA DEPARTMENT OF TRANSPORTATION


SPECIFICATION REFERENCE

221
505

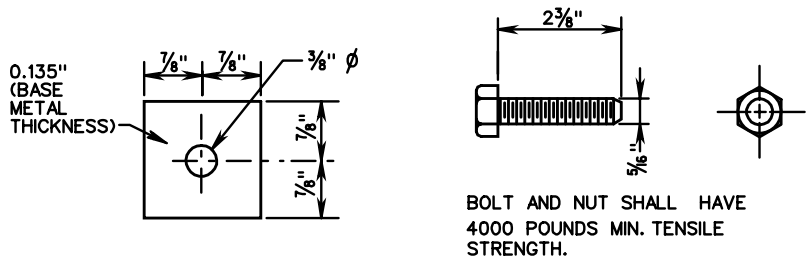


SQUARE WASHER 5/16" HEX BOLT AND NUT

⊗ THE GUARDRAIL AND MEDIAN BARRIER COMPONENTS DEPICTED IN A.R.T.B.A. TECHNICAL BULLETIN NUMBER 268B MAY BE SUBSTITUTED IF INTERCHANGEABLE WITH THE STANDARDS FOR GUARDRAIL (GR) OR MEDIAN BARRIER (MB) AND APPROVED BY THE ENGINEER.

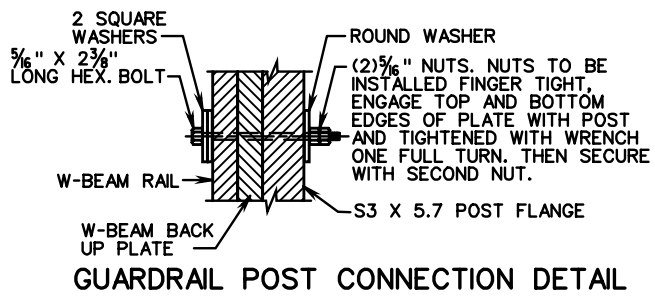


GUARDRAIL POST CONNECTION DETAIL

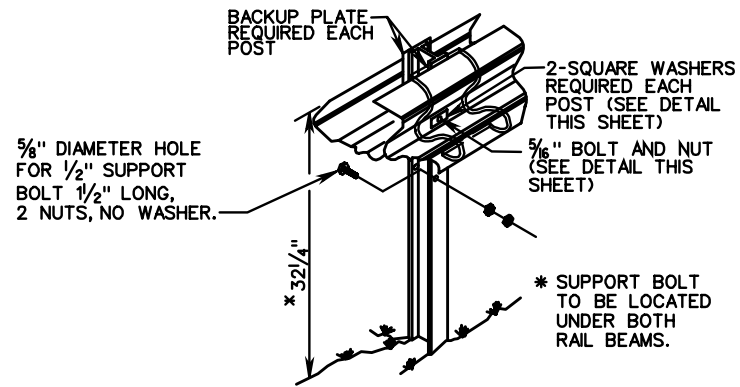

TYPICAL INSTALLATION

* HEIGHT TOLERANCE ± 3/4"

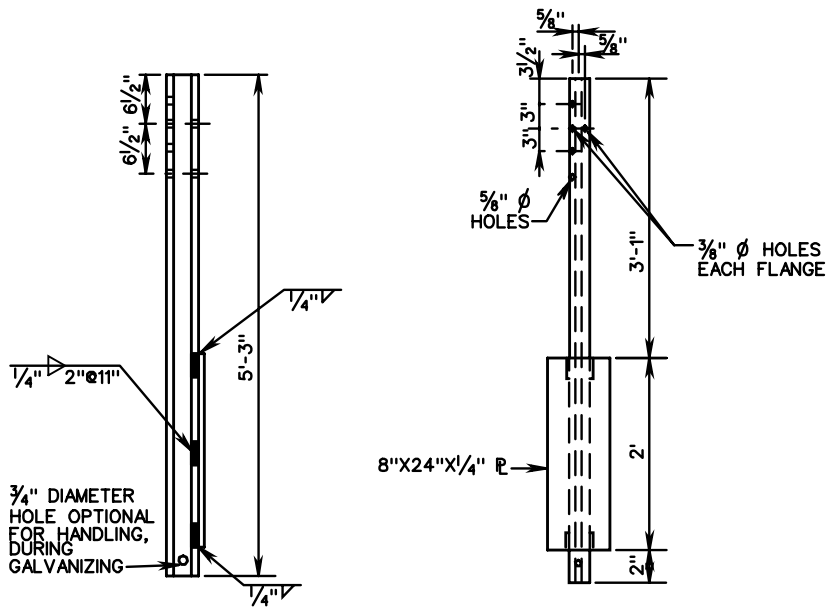


FOR ROCK INSTALLATION, 8" X 26" X 1/4" PLATE IS TO BE ELIMINATED. DRILL OR EXCAVATE HOLE FOR POST, PLACE AND BACKFILL WITH CRUSHER RUN AGGREGATE TO LEVEL OF ROCK.

S3X5.7 STEEL POST

NOTES:
 STANDARD MB-5 POST SPACING IS 12'-6"
 STANDARD MB-5A POST SPACING IS 6'-3"
 STANDARD MB-5B POST SPACING IS 3'-1/2"
 STANDARD MB-5 DEFLECTION IS 7'-0"
 ALL POSTS, BOLTS, NUTS AND WASHERS ARE TO BE GALVANIZED.
 FOR DETAILS OF GUARDRAIL ELEMENT, HARDWARE, ETC. SEE SHEET NO. 501.01.
 FOR DETAILS OF GUARDRAIL SPLICE JOINT, SEE STD. GR-8 DEPICTING AN NCHRP 350 TL-3 INSTALLATION.

SPECIFICATION REFERENCE	STANDARD W-BEAM MEDIAN BARRIER (WEAK POST SYSTEM) TL-3 (>45 MPH) VIRGINIA DEPARTMENT OF TRANSPORTATION		VDOT ROAD AND BRIDGE STANDARDS	
221 505			502.02	

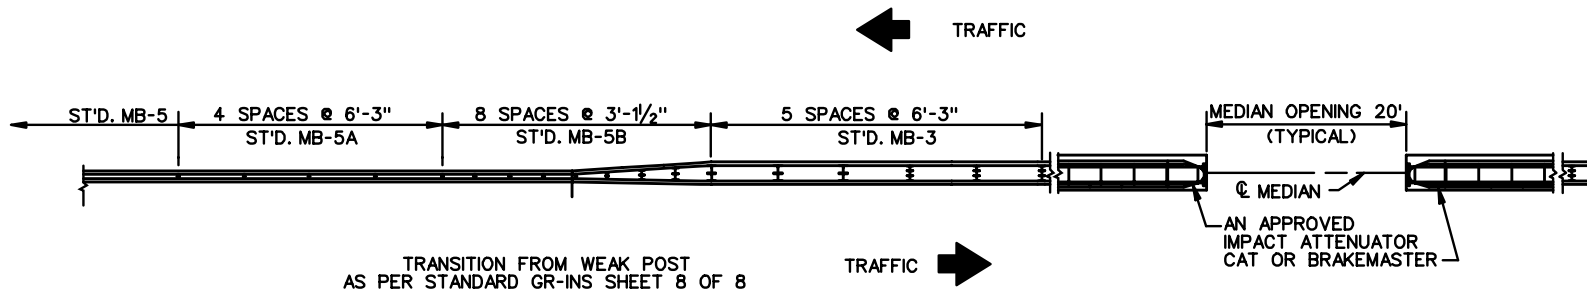

TREATMENT FOR MEDIAN BARRIER CROSS-OVER



ROAD AND BRIDGE STANDARDS

SHEET 2 OF 2

REVISION DATE


502.03

STANDARD W-BEAM MEDIAN BARRIER
(WEAK POST SYSTEM)


VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION
REFERENCE




221
505

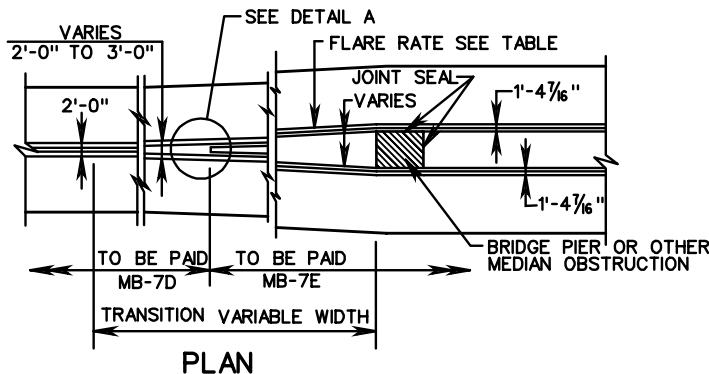

* SUGGESTED MAXIMUM FLARE RATE FOR RIGID BARRIER SYSTEMS.



DESIGN SPEED	FLARE RATES		
	INSIDE SHY LINE	BEYOND SHY LINE	
MPH	SHY LINE LS	FLARE RATE	FLARE RATE
70	10'	30:1	20:1 *
60	8'	26:1	18:1 *
50	6.5'	21:1	14:1 *
40	5'	16:1	10:1 *
30	3.5'	13:1	8:1 *

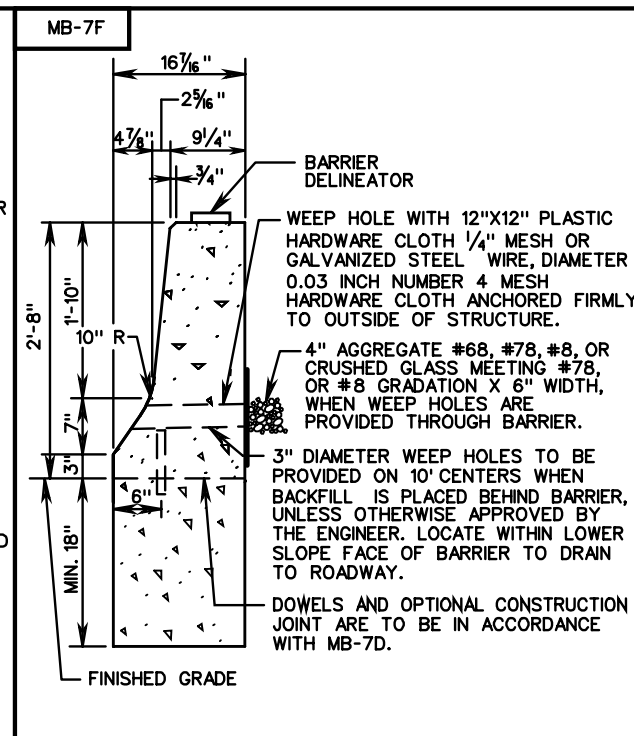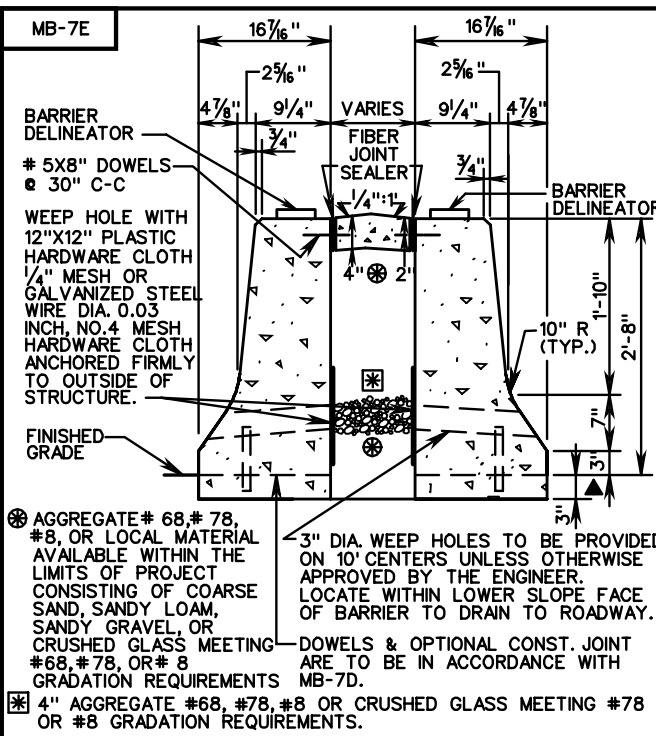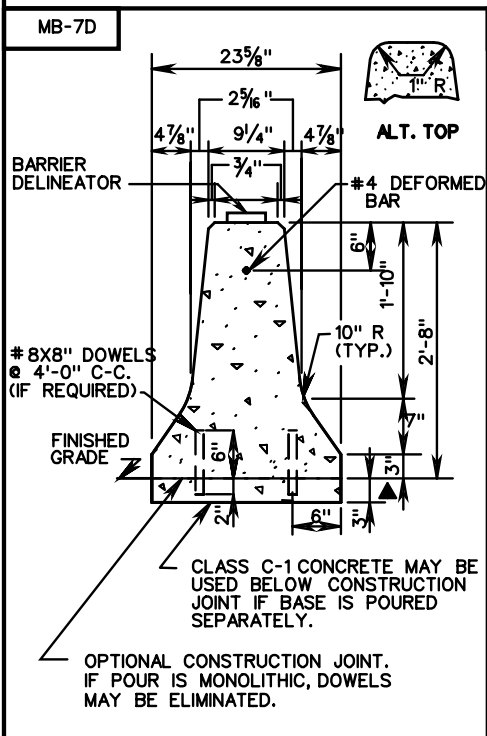

NOTES:
 IF THE CONTRACTOR ELECTS TO USE THE OPTIONAL CONSTRUCTION JOINT, TRANSVERSE JOINTS FOR CRACK CONTROL AND EXPANSION JOINTS ARE TO BE PROVIDED IN BOTH FOOTING AND BARRIER AT THE SAME LOCATION.
 TRANSVERSE JOINTS ARE TO COINCIDE WITH JOINTS IN ADJACENT PAVEMENT WITH A MAXIMUM SPACING OF 20 FEET C-C.
 CONCRETE MEDIAN BARRIER MAY BE PRECAST, CAST IN PLACE OR SLIP-FORMED. FOR PRECAST DESIGN SEE STANDARD MB-7D PC.
 HORIZONTAL REINFORCING STEEL BARS ARE TO BE SEPARATED AT ALL EXPANSION AND CONTRACTION JOINTS. A 2" CONCRETE COVER IS REQUIRED OVER THE ENDS OF THE REINFORCING STEEL.

BARRIER DELINEATOR SIZE, COLOR, AND SPACING TO BE IN ACCORDANCE WITH THE SPECIFICATIONS.
 COST OF DELINEATOR TO BE INCLUDED IN THE PRICE BID FOR MEDIAN BARRIER. REFLECTIVE SURFACE OF BARRIER DELINEATOR IN ALL INSTANCES, TO BE FACING ONCOMING TRAFFIC.
 ALTERNATE TOP DESIGN SHOWN ON MB-7D. MAY ALSO BE APPLIED TO MB-7E AND MB-7F. CONCRETE TO BE CLASS A3 IF CAST IN PLACE, 4000 PSI IF PRECAST.
 ▲ DEPTH OF CONCRETE BASE MAY BE EXTENDED AT THE CONTRACTOR'S OPTION TO COINCIDE WITH BOTTOM OF PAVEMENT COURSE IN WHICH BASE TERMINATES; HOWEVER, THE COST OF ADDITIONAL CONCRETE SHALL BE INCLUDED IN UNIT PRICE BID PER LINEAR FOOT OF BARRIER.


SPECIFICATION REFERENCE
105 502

CONCRETE MEDIAN BARRIER


VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
	502.04


*FOR PROPRIETARY MB-7D LENGTHS, REFER TO MANUFACTURER

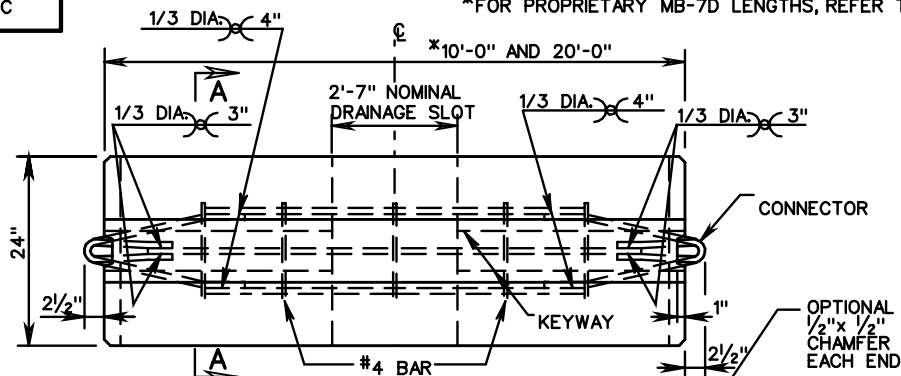


PLAN VIEW

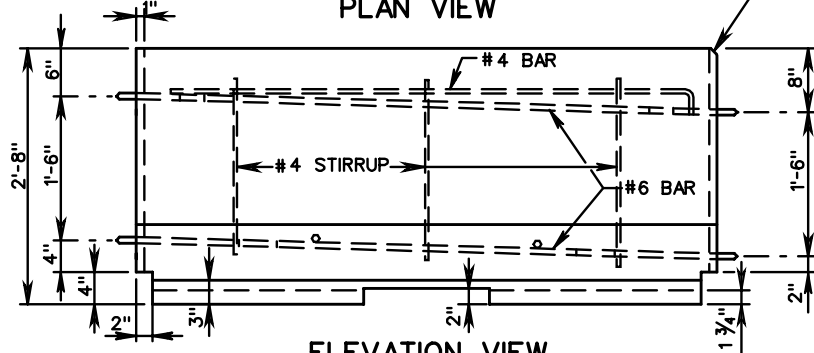

ELEVATION VIEW

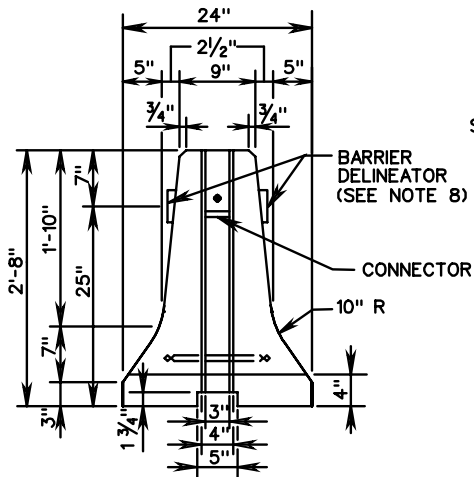

END VIEW

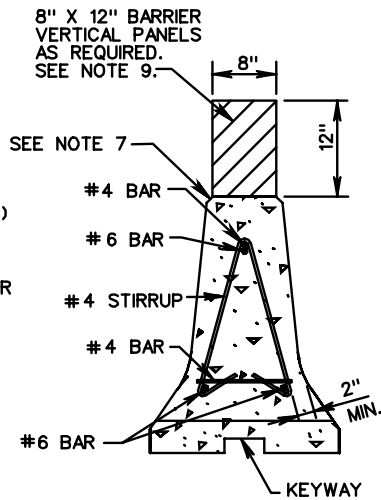

SECTION A-A

NOTES:

1. FOR POSITIVE CONNECTION DETAILS AND DIMENSIONS SEE SHEETS 502.20 - 502.24.
2. AT THE OPTION OF THE MANUFACTURER, ADDITIONAL REINFORCING MAY BE ADDED TO THE PRECAST CONCRETE BARRIER FOR HANDLING.
3. CONCRETE SHALL BE 4000 P.S.I. MINIMUM.
4. BARRIER DELINEATOR SIZE, COLOR AND SPACING SHALL BE IN ACCORDANCE WITH THE SPECIFICATIONS.
5. COST OF DELINEATOR SHALL BE INCLUDED IN THE PRICE BID FOR TRAFFIC BARRIER SERVICE.
6. OTHER PRECAST TRAFFIC BARRIER SERVICE CONCRETE DESIGNS THAT MEET NCHRP 350 TEST REQUIREMENTS AND HAVE BEEN ACCEPTED BY VDOT AS AN ACCEPTABLE ALTERNATE TO THE STANDARD DESIGN MAY BE SUBSTITUTED.
7. A 1" RADIUS MAY BE USED AS AN ALTERNATE FOR THE 3/4" CHAMFER.
8. BARRIER DELINEATOR REFLECTIVE SURFACE IN ALL INSTANCES SHALL BE FACING ONCOMING TRAFFIC.
9. BARRIER VERTICAL PANELS SHALL BE SPACED IN ACCORDANCE WITH VIRGINIA WORK AREA PROTECTION MANUAL.

WHEN USING VDOT STANDARD MB-7D PC WITH THE PIN AND LOOP POSITIVE CONNECTION, ALLOW FOR A 6'-0" DYNAMIC DEFLECTION. PROVIDE MIN. 60' OF BARRIER UPSTREAM AND DOWNSTREAM OF WORK ZONE FOR ANCHORAGE. FOR APPROVED NON-VDOT DESIGNS, REFER TO MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR DEFLECTIONS AND ANCHORAGE.

* FLARE RATES

DESIGN SPEED	INSIDE SHY LINE		BEYOND SHY LINE
	SHY LINE LS	FLARE RATE	FLARE RATE
70	10'	30:1	20:1
60	8'	26:1	18:1
50	6.5'	21:1	14:1
40	5'	16:1	10:1
30	3.5	13:1	8:1

* SUGGESTED MAXIMUM FLARED RATE FOR RIGID BARRIER SYSTEMS.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 2

REVISION DATE


502.05

PRECAST TRAFFIC BARRIER SERVICE CONCRETE

VIRGINIA DEPARTMENT OF TRANSPORTATION







SPECIFICATION REFERENCE

105
512

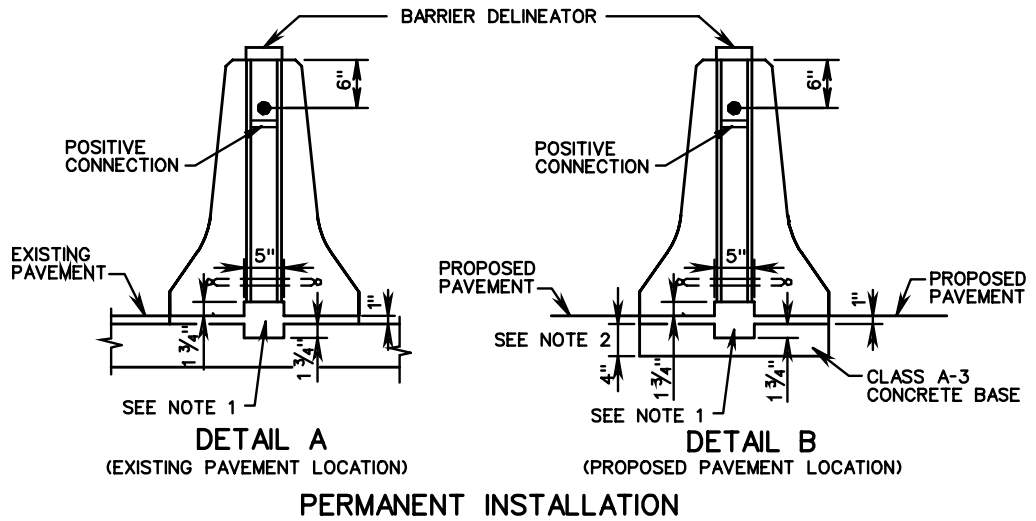

NOTES:

1. HIGH STRENGTH GROUT OR MORTAR SHALL BE IN ACCORDANCE WITH SECTION 218 OF THE SPECIFICATIONS.
2. 4" MIN. OR VARIABLE TO COINCIDE WITH SUBGRADE COURSE.
3. WHEN USED AS MEDIAN BARRIER IN A PERMANENT LOCATION, DRAINAGE SLOTS WILL BE COMPLETELY FILLED AND SEALED WITH MORTAR OR GROUT UNLESS UNIT WILL BE LOCATED OVER MEDIAN DRAINAGE STRUCTURE.
4. BARRIER DELINEATOR SIZE, COLOR, AND SPACING SHALL BE IN ACCORDANCE WITH THE SPECIFICATIONS.
5. COST OF DELINEATOR TO BE INCLUDED IN THE PRICE BID FOR MEDIAN BARRIER.
6. REFLECTIVE SURFACE OF BARRIER DELINEATOR IN ALL INSTANCES SHALL BE FACING ONCOMING TRAFFIC.
7. PIN AND CONNECTORS SHALL BE ASTM-A36. REINFORCING STEEL BARS SHALL BE ASTM A 615 GRADE 60. ONE CONNECTOR PIN ASSEMBLY WITH EACH BARRIER SECTION.

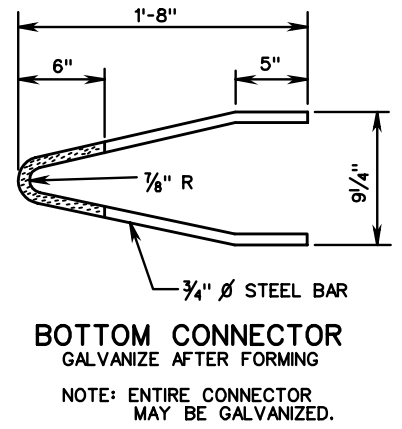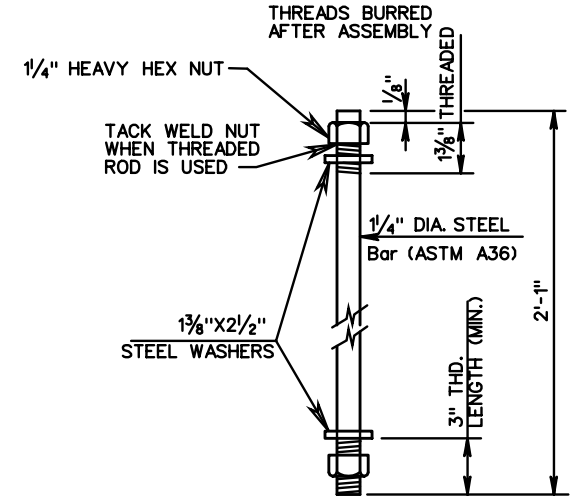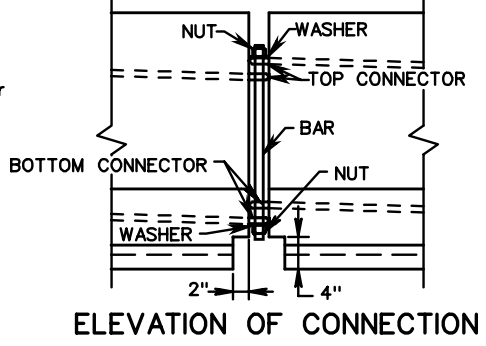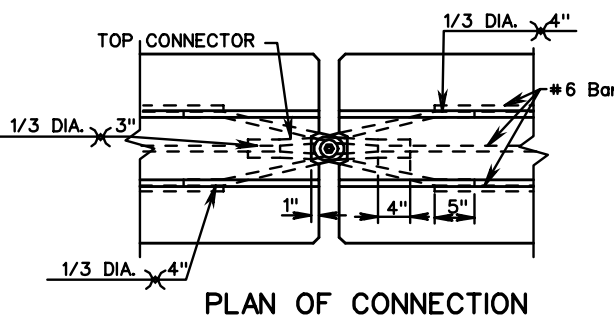


SPECIFICATION REFERENCE
105 512

PRECAST TRAFFIC BARRIER SERVICE CONCRETE


VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 2 OF 2
502.06	



MB-8A

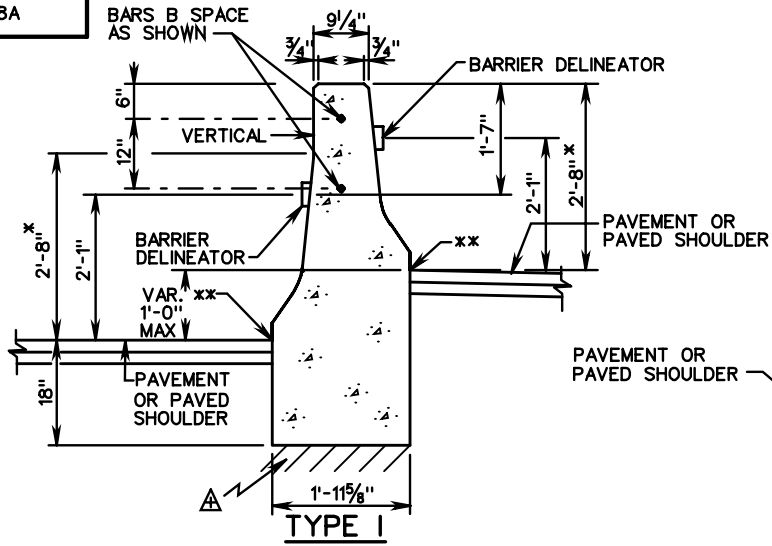


TYPE I (GREATER THAN 0 HT. DIFF., MAX. 1'-0")

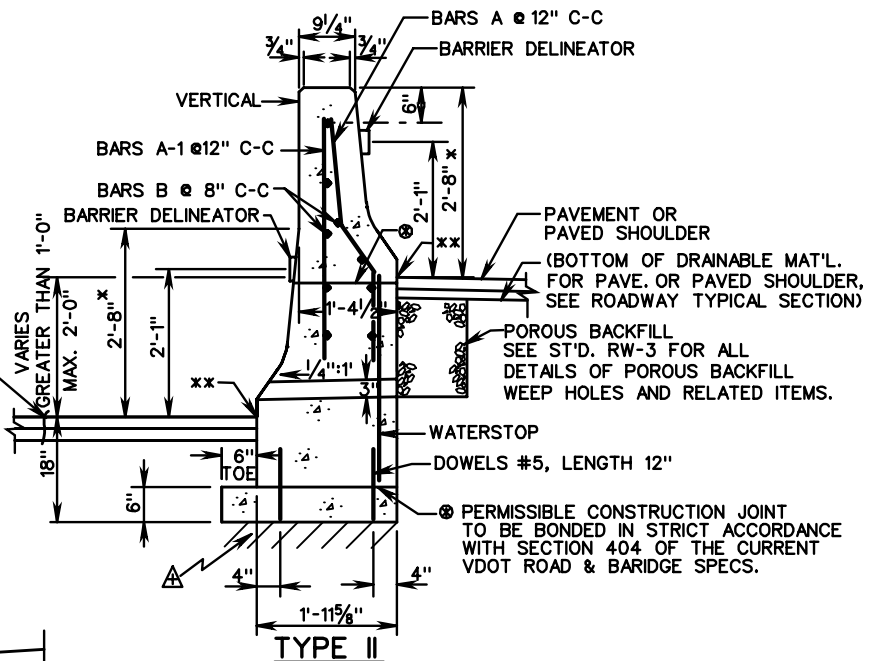

TYPE II (GREATER THAN 1'-0" HT. DIFF., MAX. 2'-0")

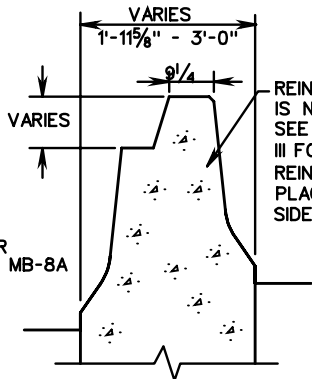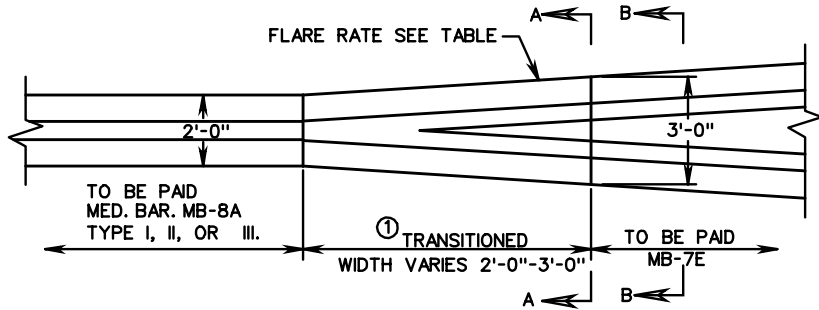

SECTION A-A
(FOUNDATION NOT SHOWN)

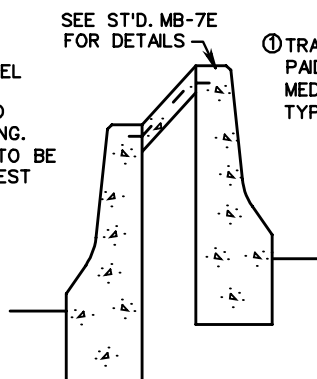

SECTION B-B
(STD. MB-7E)

* MB-7D BARRIER FACE

** DENOTES FINISHED GRADE ELEVATION

△ FOUNDATION MATERIAL UNDER MEDIAN BARRIER IS TO BE COMPACTED.

FLARE RATES

DESIGN SPEED	INSIDE SHY LINE		BYOND SHY LINE
	SHY LINE LS	FLARE RATE	FLARE RATE
70	10'	30 : 1	20 : 1 ②
60	8'	26 : 1	18 : 1 ②
50	6.5'	21 : 1	14 : 1 ②
40	5'	16 : 1	10 : 1 ②
30	3.5'	13 : 1	8 : 1 ②

② MAXIMUM FLARE RATE FOR RIGID BARRIER SYSTEMS.

① TRANSITIONED TO BE PAID FOR AS MED. BARRIER MB-8A TYPE I, II OR III.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 2

REVISION DATE

502.07


CONCRETE MEDIAN BARRIER

TYPE I, II OR III

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

105
404
502

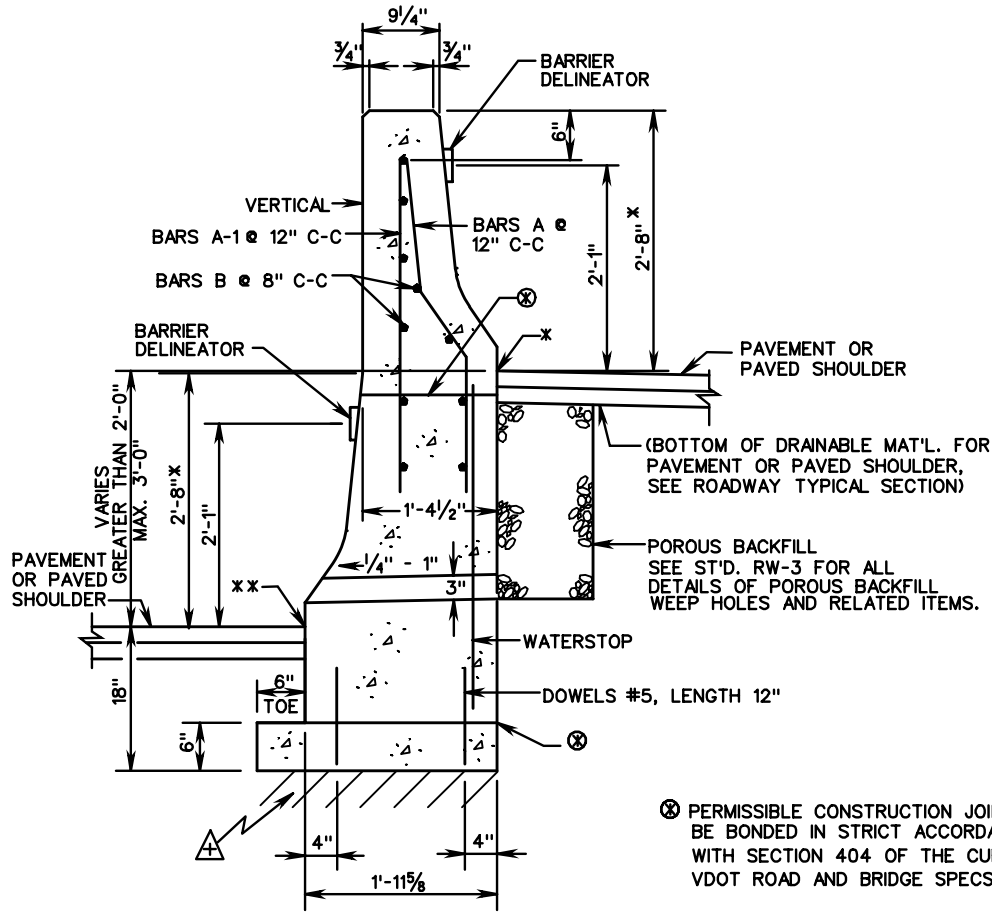

TYPE III

TYPE III (GREATER THAN 2'-0" HT. DIFF., MAX. 3'-0")

MEASUREMENT AND PAYMENT

MEDIAN BARRIER MB-8A TYPE I, II OR III WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER LIN. FOOT, WHICH SHALL BE FULL COMPENSATION FOR FURNISHING AND INSTALLING CLASS A3 CONCRETE, REINFORCING STEEL, POROUS BACKFILL AND ALL TOOLS, LABOR, EQUIPMENT AND INCIDENTALS NECESSARY TO COMPLETE THE WORK. ANY ADDITIONAL EXCAVATION, BACKFILL WITH SUITABLE MATERIAL AND COMPACTION WORK NECESSARY FOR THE CONCRETE MEDIAN BARRIER INSTALLATION IS TO BE CONSIDERED INCIDENTAL IN THE PRICE BID FOR THE CONCRETE MEDIAN BARRIER.

NOTE:

REINFORCING STEEL BARS SHOWN ARE BASED ON A 20' PANEL LENGTH.

ALL REINFORCING BARS ARE TO BE SIZE #4 GRADE 60 STEEL WITH A MINIMUM 1/2" CONCRETE COVER.


THE TYPICAL JOINT SPACING FOR CONSTRUCTION JOINTS IS 20' AND 80' FOR EXPANSION JOINTS FOR TYPE II AND III BARRIERS.

FOR DETAILS OF HOW JOINTS ARE TO BE FORMED & WATER STOP DETAILS SEE ST'D. RW-3.

TRANSVERSE JOINTS FOR TYPE I BARRIERS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE ROAD AND BRIDGE SPECIFICATIONS EXCEPT NO SCORING OR SAWING WILL BE ALLOWED.

HORIZONTAL REINFORCING STEEL BARS B ARE TO BE SEPARATED AT ALL EXPANSION & CONTRACTION JOINTS. A 2" CONCRETE COVER IS REQUIRED OVER THE ENDS OF REINFORCING STEEL.

BENDING DIAGRAM

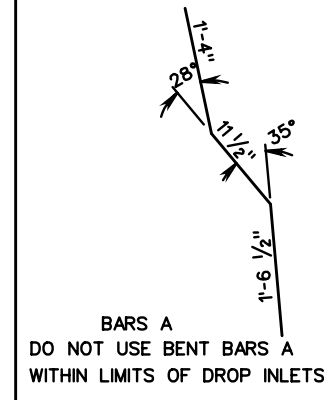

* MB-7D BARRIER FACE

** DENOTES FINISHED GRADE ELEVATION

△ FOUNDATION MATERIAL UNDER MEDIAN BARRIER IS TO BE COMPACTED.

REINFORCING STEEL SCHEDULE

PANEL	BARS "A"		BARS A-1		BARS "B"		DOWELS	
	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH
TYPE I					2	19'-8"		
TYPE II	20	4'-0"	20	4'-0"	9	19'-8"	40	1'-0"
TYPE III	20	4'-0"	20	4'-0"	9	19'-8"	40	1'-0"

SPECIFICATION REFERENCE

105
404
502

CONCRETE MEDIAN BARRIER

TYPE I, II OR III

VIRGINIA DEPARTMENT OF TRANSPORTATION






ROAD AND BRIDGE STANDARDS



REVISION DATE

SHEET 2 OF 2


502.08

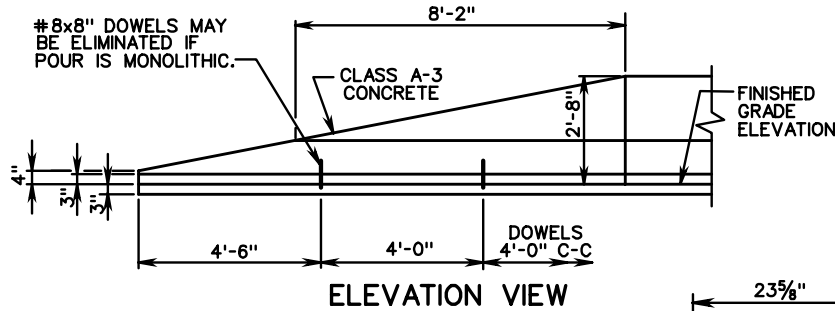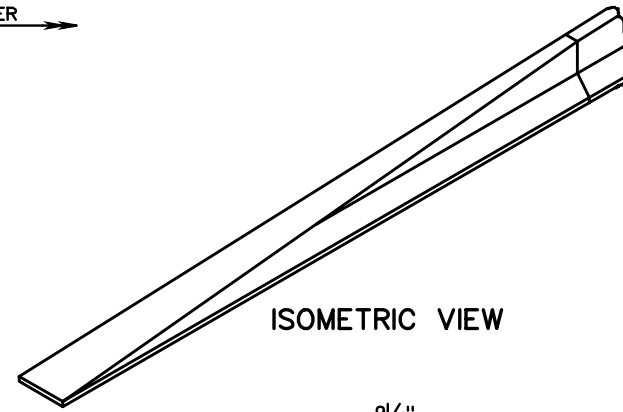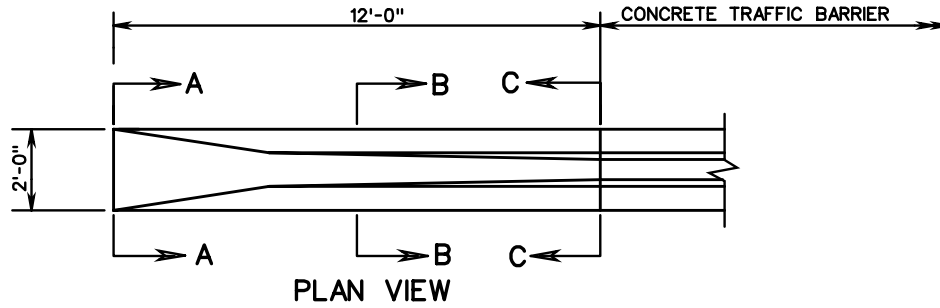

ISOMETRIC VIEW



SECTION B-B

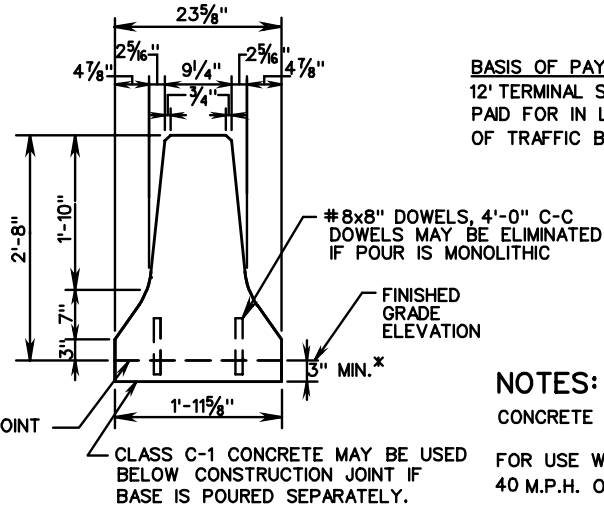

SECTION C-C

BASIS OF PAYMENT: CONCRETE MEDIAN BARRIER 12' TERMINAL SECTION IS TO BE MEASURED AND PAID FOR IN LIN. FT. ST'D. MB-7D, OR LIN. FT. OF TRAFFIC BARRIER SERVICE CONCRETE.

NOTES:


CONCRETE TO BE CLASS A3.

FOR USE WHERE THE OPERATING SPEED IS 40 M.P.H. OR LESS.

LOCATION OF THE BARRIER END SECTIONS TO BE AS NOTED ON PLANS OR AS APPROVED BY THE ENGINEER.

FOR POSITIVE CONNECTION DETAILS AND DIMENSIONS SEE STANDARD MB-INS.

ONLY FOR USE OUTSIDE OF CLEAR ZONE.



SECTION A-A

* DEPTH OF CONCRETE BASE MAY BE EXTENDED AT THE CONTRACTOR'S OPTION TO COINCIDE WITH BOTTOM OF PAVEMENT COURSE IN WHICH BASE TERMINATES; HOWEVER, THE COST OF ADDITIONAL CONCRETE SHALL BE INCLUDED IN UNIT PRICE BID PER LIN. FT. OF BARRIER.

CAST IN PLACE CONCRETE MEDIAN BARRIER
12 FT. TERMINAL SECTION
 VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE




ROAD AND BRIDGE STANDARDS


SHEET 1 OF 1

REVISION DATE

502.09

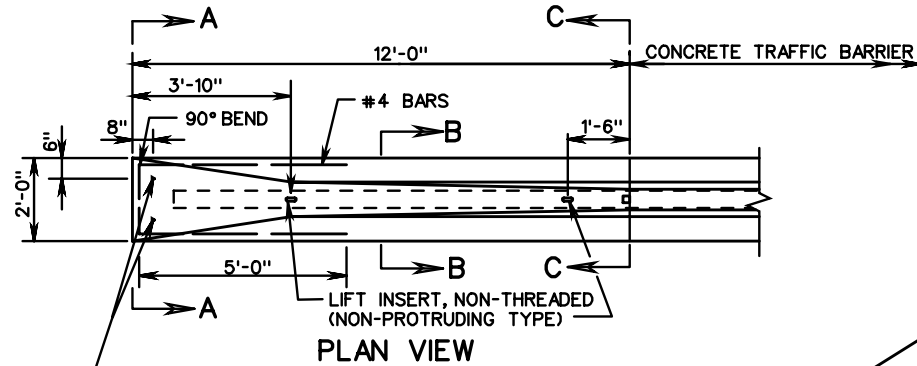

PLAN VIEW

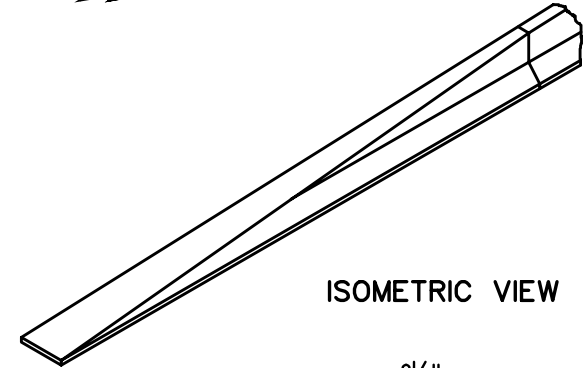


ISOMETRIC VIEW

1" I.D. METAL SLEEVE
(REINFORCING STEEL
SHALL SURROUND
1" I.D. METAL SLEEVE)


USE 3/4" x 9" EXPANSION BOLTS FOR RIGID PAVEMENT
INSTALLATION ONLY (BOLTS TO BE REMOVABLE)

USE 3/4" x 3'-0" DRIFT PINS FOR FLEXIBLE
PAVEMENT INSTALLATIONS.

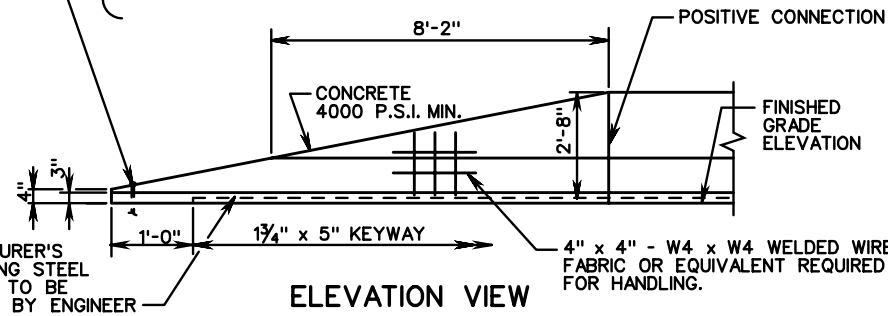


ELEVATION VIEW

MANUFACTURER'S
REINFORCING STEEL
DESIGN IS TO BE
APPROVED BY ENGINEER




ALTERNATE TOP


BASIS OF PAYMENT: CONCRETE MEDIAN BARRIER
12' TERMINAL SECTION IS TO BE MEASURED AND
PAID FOR IN LIN. FT. ST'D. MB-7D, OR LIN. FT.
OF TRAFFIC BARRIER SERVICE CONCRETE.



SECTION A-A



SECTION B-B

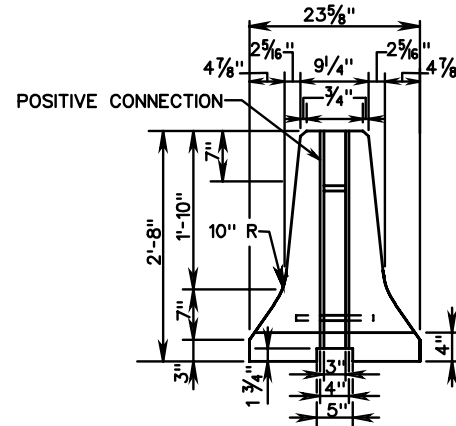

SECTION C-C

NOTES:

CONCRETE TO BE 4000 P.S.I.

REINFORCING STEEL TO BE GRADE 60.
ALL REINFORCING IS TO HAVE A MINIMUM
CONCRETE COVER OF 1/2".

FOR USE WHERE THE OPERATING SPEED IS
40 M.P.H. OR LESS.

LOCATION OF THE BARRIER END SECTIONS TO
BE AS NOTED ON PLANS OR AS APPROVED
BY THE ENGINEER.

FOR POSITIVE CONNECTION DETAILS AND
DIMENSIONS SEE STANDARD MB-INS.

ONLY FOR USE OUTSIDE OF CLEAR ZONE.

SPECIFICATION
REFERENCE

105

PRECAST CONCRETE MEDIAN BARRIER

12 FT. TERMINAL SECTION

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT


ROAD AND BRIDGE STANDARDS

REVISION DATE


SHEET 1 OF 1

502.10

MB-10A

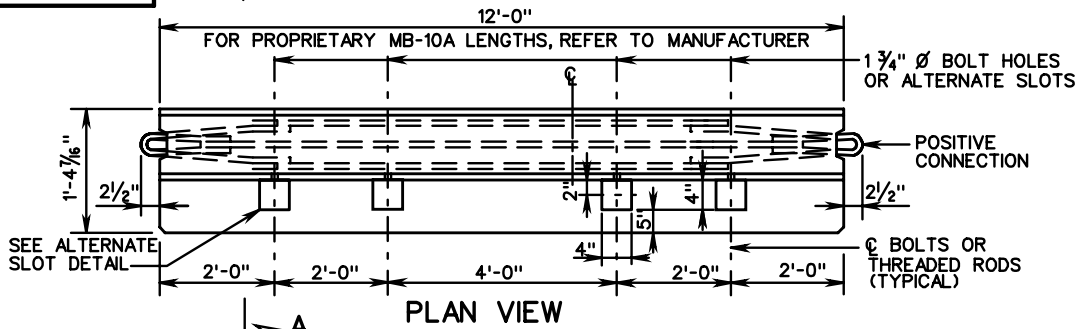


PLAN VIEW

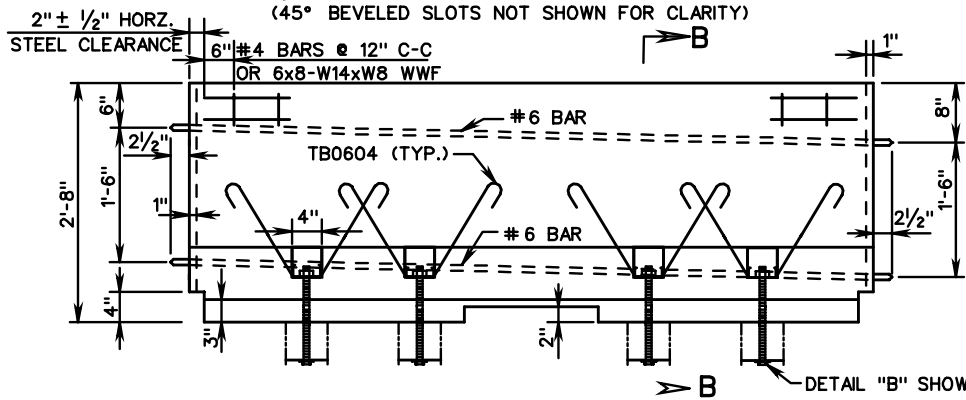


ELEVATION VIEW


(45° BEVELED SLOTS NOT SHOWN FOR CLARITY)

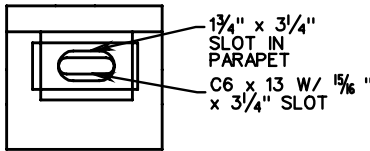

ALTERNATE SLOT DETAIL

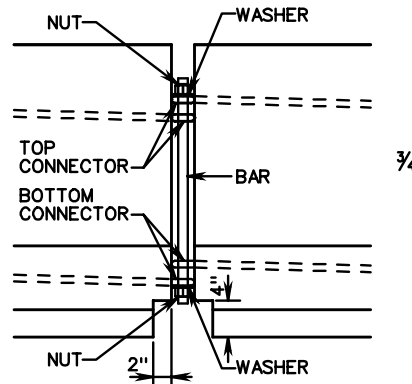

ELEVATION OF CONNECTION

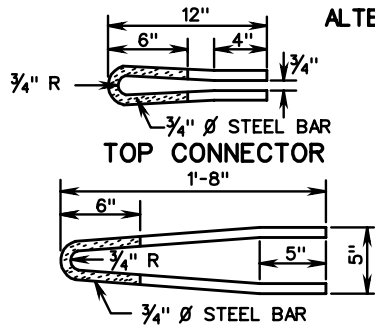


BOTTOM CONNECTOR

GALVANIZE AFTER FORMING
NOTE: ENTIRE CONNECTOR MAY BE GALVANIZED.

ALL ENDS OPTIONAL CHAMFER (1/2" x 1/2")

POSITIVE CONNECTION

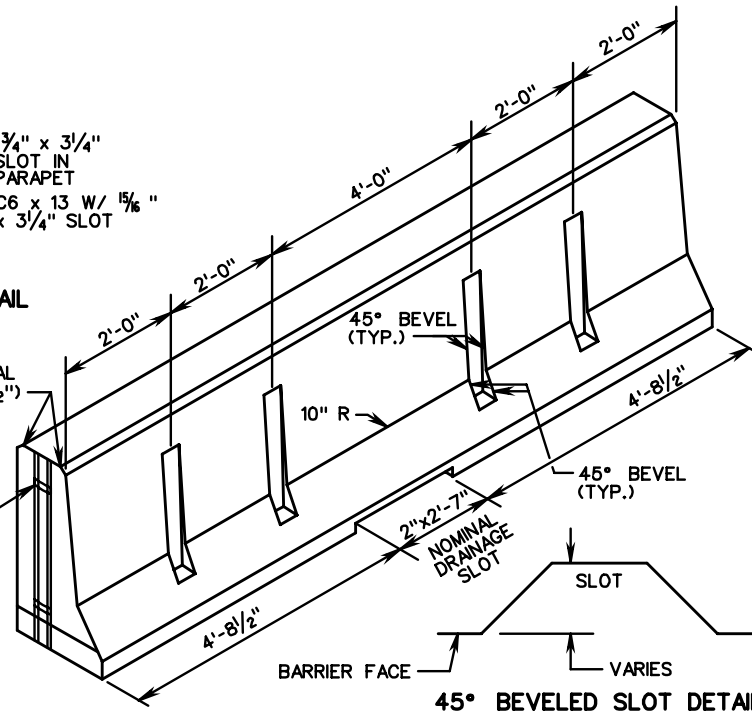


45° BEVELED SLOT DETAIL

REINFORCING STEEL SCHEDULE

FOR ONE (1) SECTION

MARK	No.	SIZE	LENGTH	PIN Ø	LOCATION
TB0401	8	4	11'-5"	—	TEMP. PARAPET
TB0502	12	5	4'-3"	2 1/2"	"
TB0503	12	5	2'-8"	2 1/2"	"
TB0604	8	6	4'-8"	4 1/2"	"

BENDING DIAGRAM

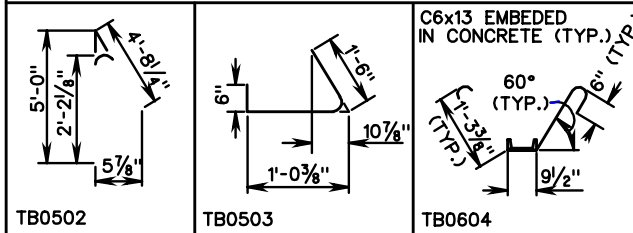

DIMENSIONS IN BENDING DIAGRAMS ARE OUT-TO-OUT OF BARS, EXCEPT AS SHOWN.
POUNDS OF REINFORCING STEEL = 202
REINFORCING SCHEDULE BASED ON 12'-0" UNIT LENGTH.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 2

REVISION DATE

502.11


TRAFFIC BARRIER SERVICE CONCRETE PARAPET (SINGLE FACE)

(FOR TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

105
502

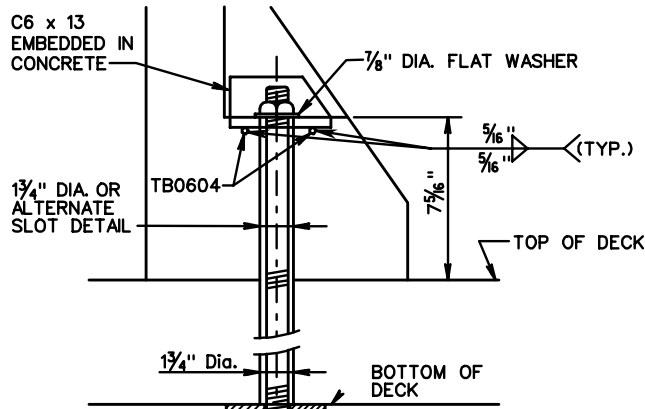

1 3/4" DIA. OR ALTERNATE SLOT DETAIL

TOP OF DECK

7 5/16"

5/16" (TYP.)

5/16"


1 3/4" Dia.

BOTTOM OF DECK


7/8" Ø H.S. BOLT & HEX NUT (A325), OR 7/8" Ø DOUBLE ENDED THREADED ROD & HEX NUT (A-193 GR. B7).

3 1/2" x 3 1/2" x 1/2" SQUARE WASHER (A36 OR A572) WITH 1 5/16" Ø HOLE.

AT THE DISCRETION OF THE ENGINEER, A LARGER WASHER SIZE MAY BE REQUIRED IF SPALLING IS EVIDENT AT BOTTOM OF DECK. TO PREVENT OR MINIMIZE SPALLING, PREDRILLING A PILOT HOLE USING A SMALLER DIAMETER DRILL BIT IS REQUIRED.

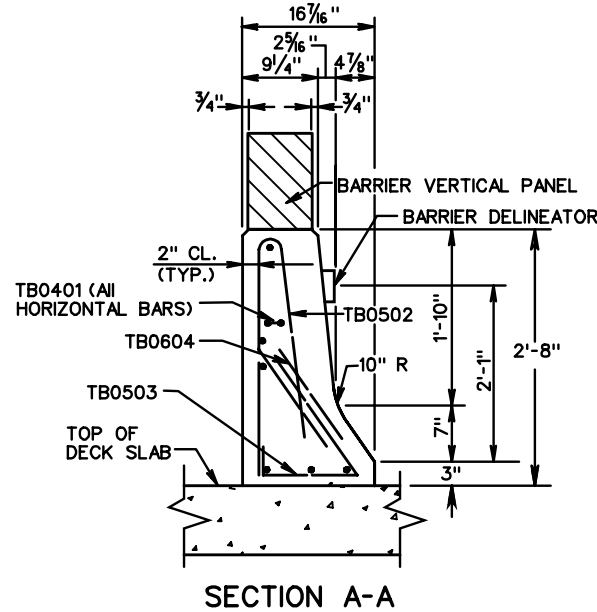

SECTION A-A

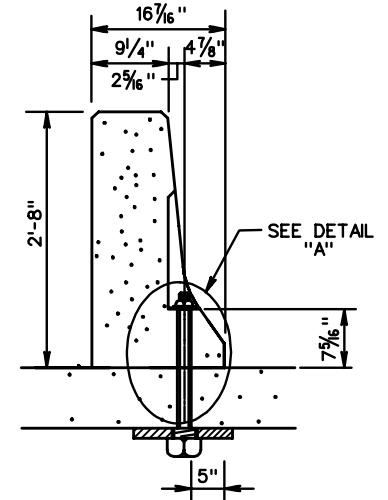

SECTION B-B
(ANCHOR BOLT)
BOLT DOWN SIDE ADJACENT TO TRAFFIC

DETAIL "A" NOTES:

1. BARRIER DELINEATOR TO BE SPACED IN ACCORDANCE WITH SECTION 702, OF THE ROAD AND BRIDGE SPECIFICATIONS AND THE BARRIER VERTICAL PANELS TO BE SPACED IN ACCORDANCE WITH VIRGINIA WORK AREA PROTECTION MANUAL. REFLECTIVE SURFACE, IN ALL INSTANCES, TO BE FACING ONCOMING TRAFFIC.
2. CONCRETE 4000 PSI(MIN.). REINFORCING STEEL GRADE 60.
3. AFTER REMOVING TEMPORARY BARRIER, CUT 7/8" Ø BOLT OR THREADED ROD AS LOW AS PRACTICAL BELOW ROADWAY SURFACE AND FILL RECESS WITH EPOXY BONDING COMPOUND EP-4 (DETAIL "A") OR REMOVE 7/8" Ø BOLTS OR THREADED RODS AND FILL HOLES WITH GROUT BONDED WITH EPOXY BONDING COMPOUND EP-4 (DETAIL "A").
4. COST OF BARRIER DELINEATOR AND BARRIER VERTICAL PANELS TO BE INCLUDED IN PRICE BID PER LINEAR FOOT OF BARRIER SERVICE.
5. WHEN BARRIER IS LOCATED ON VERTICAL AND/OR HORIZONTAL CURVES, THE OPENING AT THE JOINT IS NOT TO EXCEED 1".
6. DESIGN FEATURES RELATING TO CONSTRUCTION OR TO REGULATION AND CONTROL OF TRAFFIC MAY BE SUBJECT TO CHANGE AS DEEMED NECESSARY BY THE DEPARTMENT.
7. FOR POSITIVE CONNECTION DETAILS AND DIMENSIONS SEE STANDARD SHEETS 502.20 - 502.24.

SPECIFICATION REFERENCE

TRAFFIC BARRIER SERVICE CONCRETE PARAPET
(SINGLE FACE)

(FOR TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)

VIRGINIA DEPARTMENT OF TRANSPORTATION


VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE


SHEET 2 OF 2

502.12

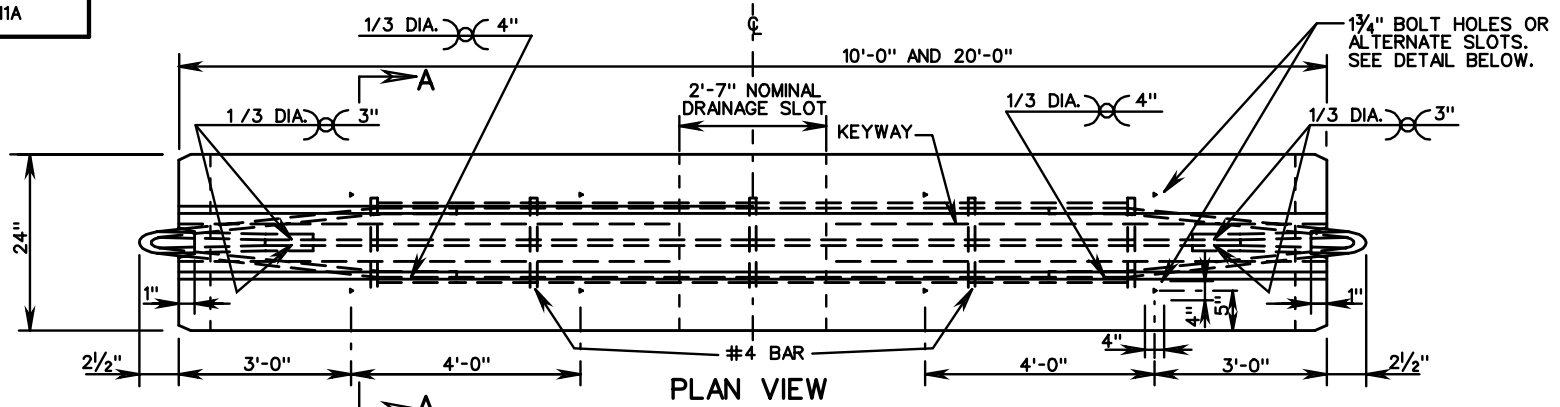

PLAN VIEW


(45° BEVELED SLOTS NOT SHOWN FOR CLARITY)

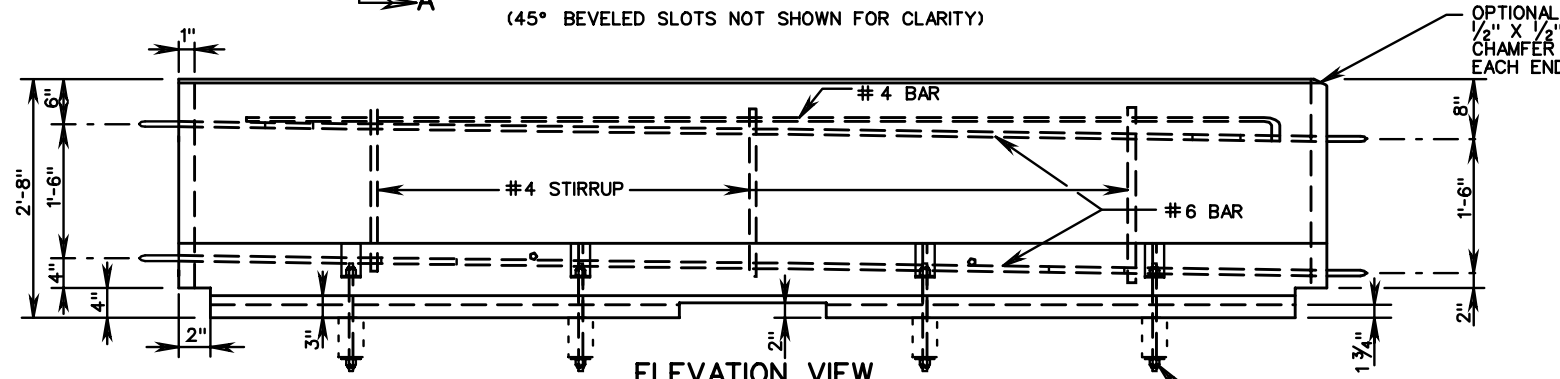


ELEVATION VIEW

(45° BEVELED SLOTS NOT SHOWN FOR CLARITY)


3/2" X 3/2" X 1/2" SQUARE WASHER. SEE DETAIL B, SHEET 2 OF 2.

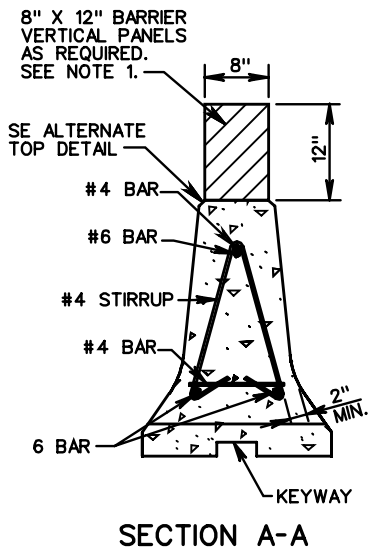


SECTION A-A

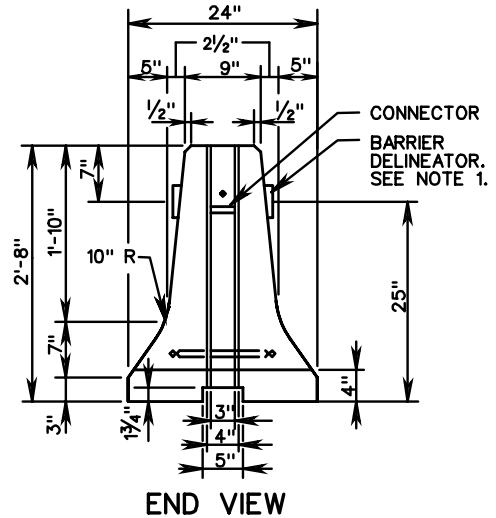

END VIEW

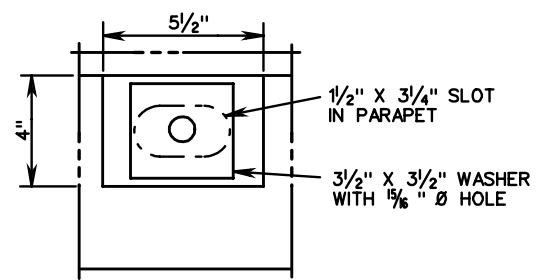

ALTERNATE SLOT DETAIL



ALTERNATE TOP



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 3

REVISION DATE

502.13

TRAFFIC BARRIER SERVICE CONCRETE PARAPET (DOUBLE FACE)


(FOR TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)
 VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE



105
 512

NOTES:



1. BARRIER DELINEATOR IS TO BE SPACED IN ACCORDANCE WITH SECTION 702 OF THE ROAD AND BRIDGE SPECIFICATIONS AND THE BARRIER VERTICAL PANELS ARE TO BE SPACED IN ACCORDANCE WITH THE VIRGINIA WORK AREA PROTECTION MANUAL.
2. REFLECTIVE SURFACE, IN ALL INSTANCES, ARE TO BE FACING ONCOMING TRAFFIC.
3. COST OF BARRIER DELINEATOR AND BARRIER VERTICAL PANELS ARE TO BE INCLUDED IN PRICE BID PER LINEAR FOOT OF BARRIER SERVICE.
4. ANCHOR BOLTS SHALL BE INSTALLED ON TRAFFIC SIDE.
5. CONCRETE 4000 PSI. (MIN.)
6. WELDED WIRE FABRIC MAY BE ONE SHEET BENT TO FIT CONFIGURATION OR TWO SEPARATE SHEETS, ONE ON EACH FACE.
7. AFTER REMOVING TEMPORARY BARRIER, CUT $\frac{1}{8}$ " ϕ BOLT OR THREADED ROD AS LOW AS PRACTICAL BELOW ROADWAY SURFACE AND FILL RECESS WITH EPOXY BONDING COMPOUND EP-4 (DETAIL "A") OR REMOVE $\frac{1}{8}$ " ϕ BOLT OR THREADED ROD AND FILL HOLE WITH GROUT BONDED WITH EPOXY BONDING COMPOUND EP-4, (DETAIL "A").
8. FOR POSITIVE CONNECTION DETAILS AND DIMENSIONS SEE STANDARD MB-INS.

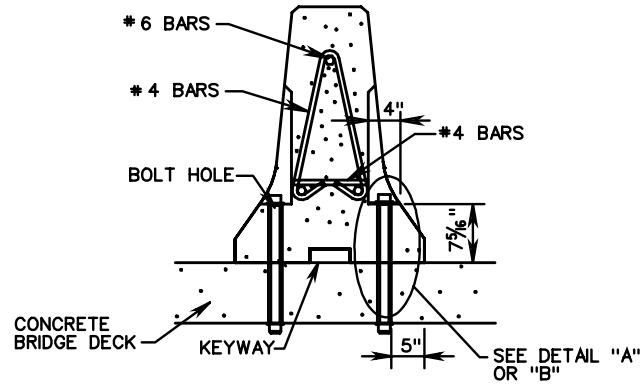

**SECTION B-B
(ANCHOR BOLT)**
BOLT DOWN SIDE ADJACENT TO TRAFFIC

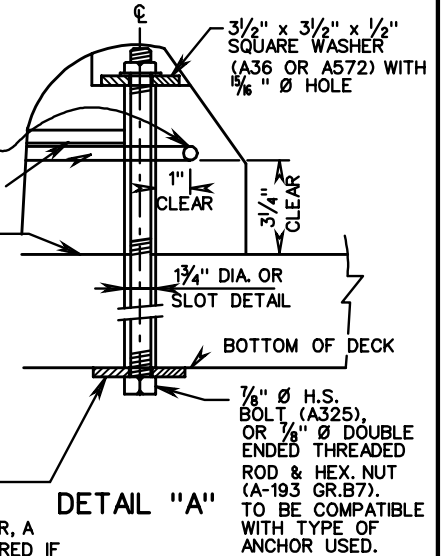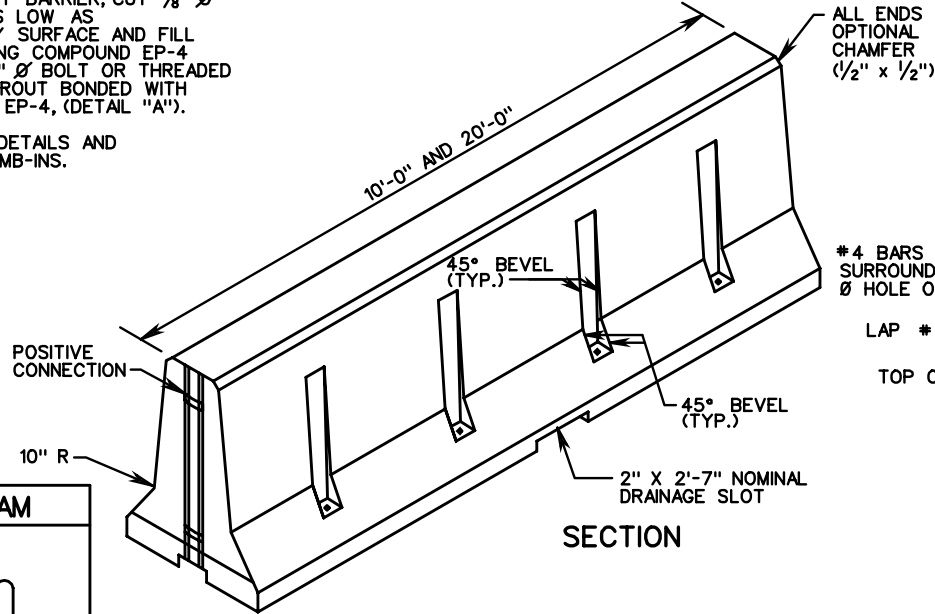

3/2" x 3/2" x 1/2" SQUARE WASHER (A36 OR A572) WITH 1 5/8" ϕ HOLE. AT THE DISCRETION OF THE ENGINEER, A LARGER WASHER SIZE MAY BE REQUIRED IF SPALLING IS EVIDENT AT BOTTOM OF DECK. TO PREVENT OR MINIMIZE SPALLING, PREDRILLING A PILOT HOLE USING A SMALLER DIAMETER DRILL BIT IS REQUIRED.

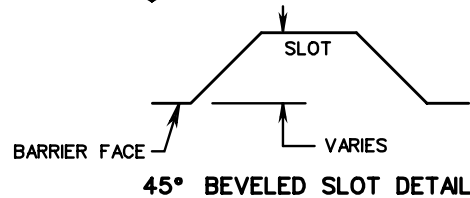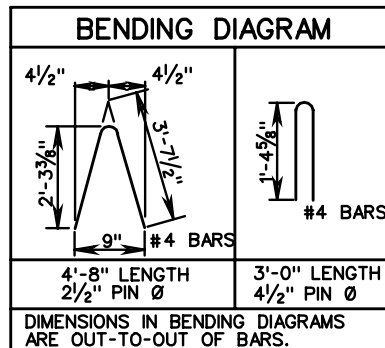


SPECIFICATION REFERENCE
105 512

**TRAFFIC BARRIER SERVICE CONCRETE PARAPET
(DOUBLE FACE)**
(FOR TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)
VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT	
ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 2 OF 3
	502.14

STAKE LOCATIONS WHEN STAKING STANDARD MB-11A.
NOT TO BE USED ON BRIDGE DECKS.
4 PER PRECAST UNIT.
1 AT EACH CORNER.

STAKE LOCATIONS WHEN STAKING
STANDARD MB-11A.
NOT TO BE USED ON BRIDGE DECKS.
4 PER PRECAST UNIT.
1 AT EACH CORNER.

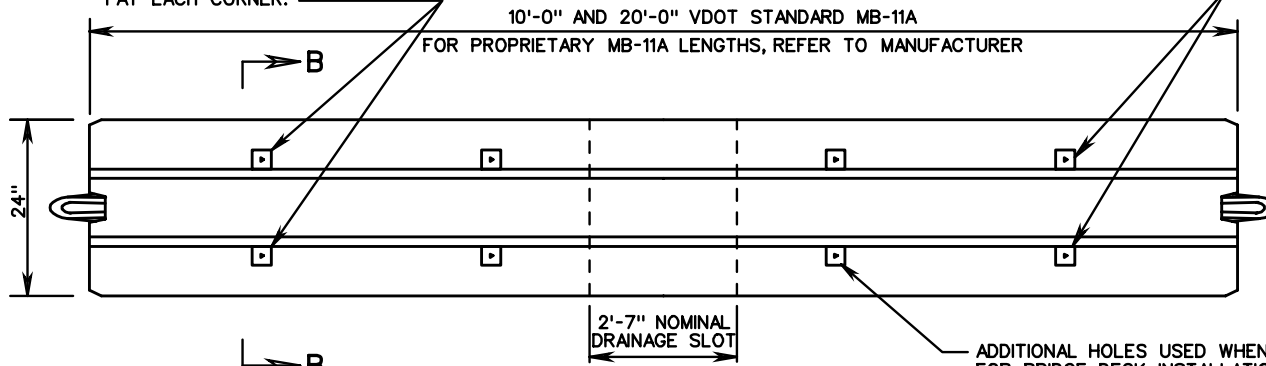

ADDITIONAL HOLES USED WHEN BOLTING TO BRIDGE DECKS.
FOR BRIDGE DECK INSTALLATIONS, REFER TO SHEETS
501.53 & 501.54 OF THE ROAD AND BRIDGE STANDARDS.


PLAN VIEW

(45° BEVELED SLOTS NOT SHOWN FOR CLARITY)

FOR CONC. PAVEMENT
PRE-DRILL HOLES

ASPHALT CONC. PAVEMENT,
COMPACTED BASE MATERIAL,
CONCRETE PAVEMENT, OR
ASPHALT OVER CONCRETE PAVE.
1'-0" MIN. BEYOND EACH SIDE OF
BARRIER.

1" Ø X 24" GALV.
A36 STEEL STAKE.
4 PER PRECAST
UNIT. 1 AT EACH
CORNER. SEE
NOTE 3.

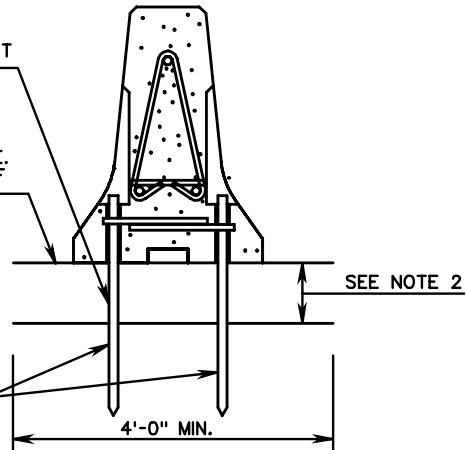

SECTION B-B

TEMPORARY INSTALLATION ON ASPHALT CONCRETE
PAVEMENT, COMPACTED BASE MATERIAL, CONCRETE
PAVEMENT, OR ASPHALT OVER CONCRETE PAVEMENT
(NOT TO BE USED ON BRIDGE DECKS)

NOTES:

1. STAKING OF STANDARD MB-11A TO ASPHALT CONCRETE PAVEMENT, COMPACTED BASE MATERIAL, CONCRETE PAVEMENT, OR ASPHALT OVER CONCRETE PAVEMENT IS REQUIRED WHEN TRAFFIC BARRIER SERVICE CONCRETE IS PLACED WITHIN THE TWO (2) FOOT OFFSET OF A TRENCHING OPERATION (4' OR GREATER IN DEPTH) OR WHEN DETERMINED BY THE ENGINEER.
2. 2" MIN. FOR ASPHALT CONCRETE.
6" MIN. FOR COMPACTED BASE MATERIAL.
3. DRIVE STAKE HEAD BELOW FACE OF BARRIER TO PREVENT SNAGGING.
4. CONTRACTOR TO VERIFY PAVEMENT STRUCTURE PRIOR TO PLACING STAKES.
5. UPON REMOVAL OF THE STAKES AND BARRIERS, REPAIR THE RESULTING HOLES AS FOLLOWS OR AS DIRECTED BY THE ENGINEER. CLEAN AND FILL WITH TYPE EP-4 OR EP-5 EPOXY MORTAR CONFORMING TO THE REQUIREMENTS OF SECTION 243 FOR HYDRAULIC CEMENT CONCRETE PAVEMENT AND ASPHALT CONCRETE PAVEMENT. CARE SHALL BE TAKEN NOT TO TRAP AIR WITHIN OR AT THE BOTTOM OF THE EPOXY MORTAR.



ROAD AND BRIDGE STANDARDS

SHEET 3 OF 3

REVISION DATE

502.15

**TRAFFIC BARRIER SERVICE CONCRETE PARAPET
(DOUBLE FACE)**


(FOR TEMPORARY INSTALLATION ON ROADWAYS)

VIRGINIA DEPARTMENT OF TRANSPORTATION



SPECIFICATION
REFERENCE

105
512

BARRIER TAPER FROM 50" TALL F-SHAPE TO A STANDARD MB-7A OR MB-7D BARRIER TO BE ACCOMPLISHED WITHIN THE 6'-0" AS INDICATED.

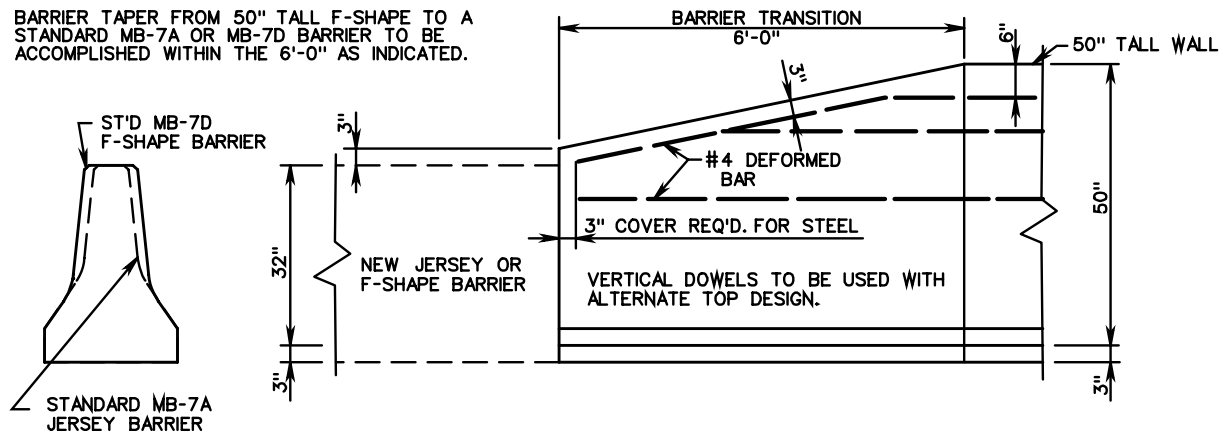

TRANSITION FROM 50" TALL WALL TO 32" JERSEY OR F-SHAPE BARRIER

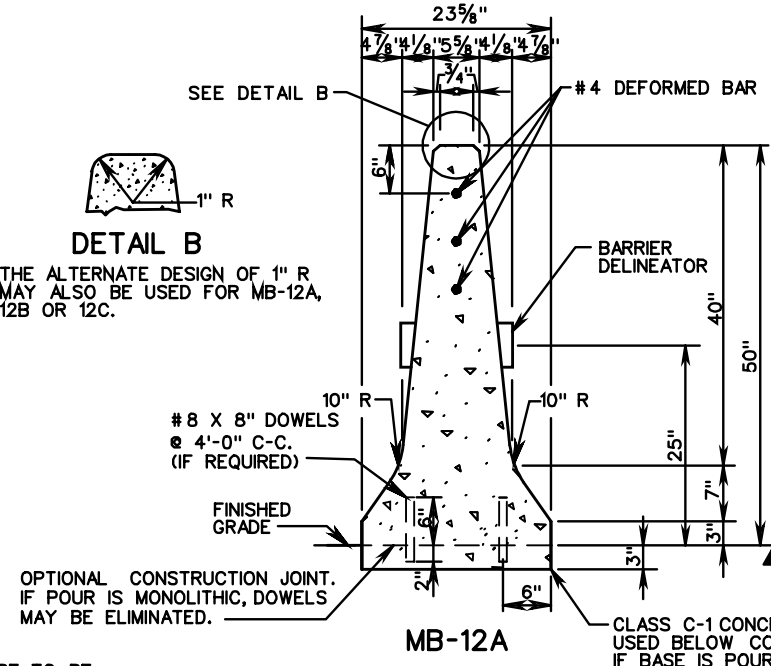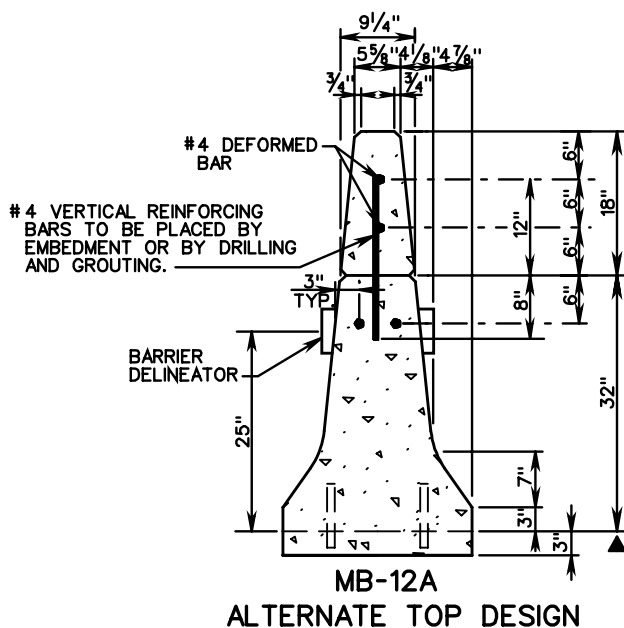

IF BARRIER EXTENSION IS CONSTRUCTED AS A SEPARATE ITEM, ALL JOINTS ARE TO BE CONSTRUCTED AT THE SAME INTERVAL AS CONCRETE BARRIER. ALL VERTICAL BARS ARE #4 AT 24" MAX. SPACING. LENGTH OF DOWELS SHALL BE 20". VERTICAL BARS MAY BE PLACED IN THE CONCRETE OR BONDED INTO DRILLED HOLES IN HARDENED CONCRETE. WHEN HOLES ARE DRILLED NON-SHRINK GROUT SHALL BE USED TO BOND THE BARS IN PLACE.


▲ DEPTH OF CONCRETE BASE MAY BE EXTENDED AT THE CONTRACTOR'S OPTION TO COINCIDE WITH BOTTOM OF PAVEMENT COURSE IN WHICH BASE TERMINATES; HOWEVER, THE COST OF ADDITIONAL CONCRETE SHALL BE INCLUDED IN UNIT PRICE BID PER LINEAR FT. OF BARRIER.

SPECIFICATION REFERENCE
105 502

CONCRETE MEDIAN BARRIER (TALL WALL)

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 2
502.16	

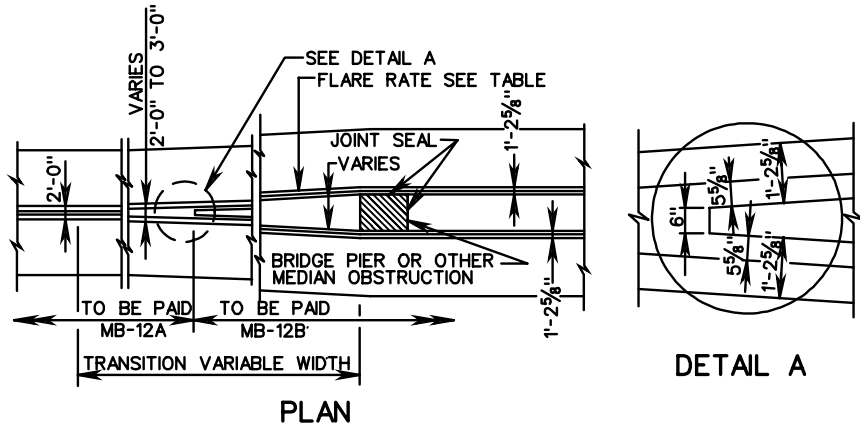

NOTES:

IF THE CONTRACTOR ELECTS TO USE THE OPTIONAL CONSTRUCTION JOINTS, TRANSVERSE JOINTS FOR CRACK CONTROL AND EXPANSION JOINTS ARE TO BE PROVIDED IN BOTH FOOTING AND BARRIER AT THE SAME LOCATION.

TRANSVERSE JOINTS ARE TO COINCIDE WITH JOINTS IN ADJACENT PAVEMENT WITH A MAXIMUM SPACING OF 20 FT. C-C.


CONCRETE MEDIAN BARRIER MAY BE CAST IN PLACE OR SLIP-FORMED.

HORIZONTAL REINFORCING STEEL BARS ARE TO BE SEPARATE AT ALL EXPANSION AND CONTRACTION JOINTS. A 2" CONCRETE COVER IS REQUIRED OVER THE ENDS OF THE REINFORCING STEEL.

BARRIER DELINEATOR SIZE, COLOR AND SPACING SHALL BE IN ACCORDANCE WITH THE SPECIFICATIONS. COST OF DELINEATOR SHALL BE INCLUDED IN THE PRICE BID FOR MEDIAN BARRIER. REFLECTIVE SURFACE OF BARRIER DELINEATOR, IN ALL INSTANCES, SHALL BE FACING THE ONCOMING TRAFFIC.

CONCRETE SHALL BE CLASS A3 IF CAST IN PLACE, 4000 PSIF PRECAST.

▲ DEPTH OF CONCRETE BASE MAY BE EXTENDED AT THE CONTRACTOR'S OPTION TO COINCIDE WITH BOTTOM OF PAVEMENT COURSE IN WHICH BASE TERMINATES; HOWEVER, THE COST OF ADDITIONAL CONCRETE SHALL BE INCLUDED IN UNIT PRICE BID PER LINEAR FT. OF BARRIER.

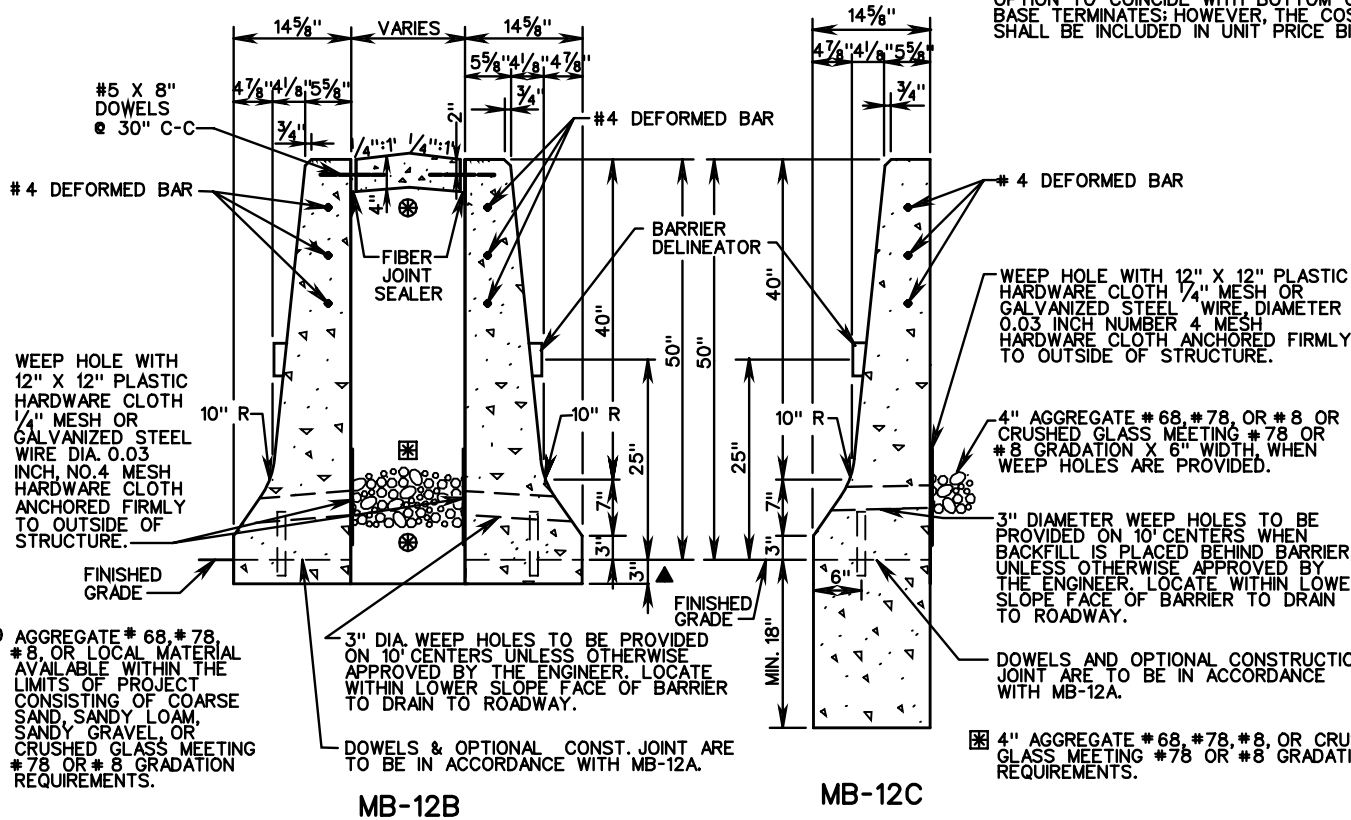

FLARE RATES			
DESIGN SPEED	INSIDE SHY LINE		BEYOND SHY LINE
MPH	SHY LINE LS	FLARE RATE	FLARE RATE
70	10'	30:1	20:1 *
60	8'	26:1	18:1 *
50	6.5'	21:1	14:1 *
40	5'	16:1	10:1 *
30	3.5'	13:1	8:1 *

* SUGGESTED MAXIMUM FLARE RATE FOR RIGID BARRIER SYSTEMS.

CONCRETE MEDIAN BARRIER (TALL WALL)

SPECIFICATION REFERENCE

105
502




ROAD AND BRIDGE STANDARDS


SHEET 2 OF 2

REVISION DATE


502.17

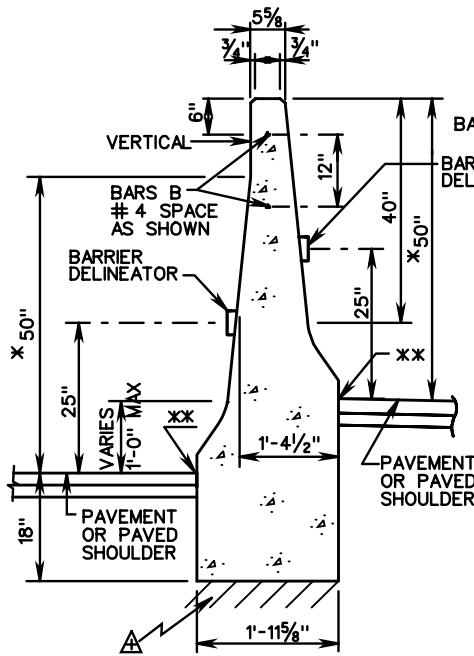

TYPE I
TYPE I (GREATER THAN 0 HT. DIFF., MAX. 1'-0")

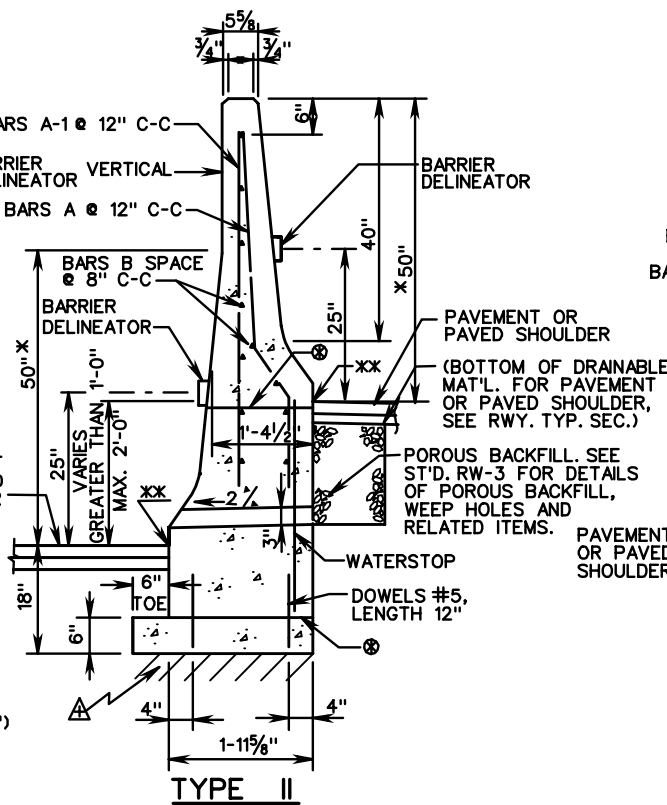

TYPE II
TYPE II (GREATER THAN 1'-0" HT. DIFF., MAX. 2'-0")

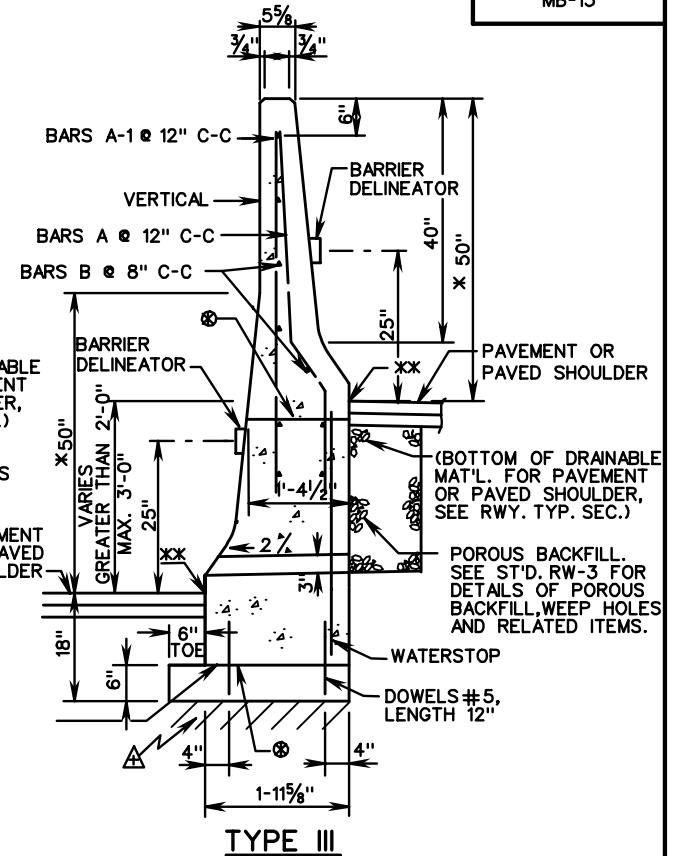

TYPE III
TYPE III (GREATER THAN 2'-0" HT. DIFF., MAX. 3'-0")


* FOR DETAILS OF BARRIER FACE SEE STANDARD MB-12A.

XX DENOTES FINISHED GRADE ELEVATION

△ FOUNDATION MATERIAL UNDER CONCRETE MEDIAN BARRIER IS TO BE COMPACTED

⊗ PERMISSIBLE CONSTRUCTION JOINT TO BE BONDED IN STRICT ACCORDANCE WITH SEC. 404 OF THE CURRENT VDOT ROAD AND BRIDGE SPECIFICATIONS.

BENDING DIAGRAM

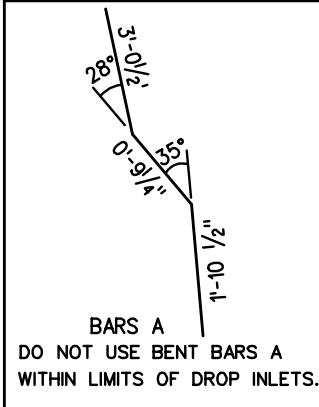

MEASUREMENT AND PAYMENT

MEDIAN BARRIER MB-13 TYPE I, II OR III WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER LIN. FOOT, WHICH SHALL BE FULL COMPENSATION FOR FURNISHING AND INSTALLING CLASS A3 CONC., REINFORCING STEEL, POROUS BACKFILL AND ALL TOOLS, LABOR, EQUIPMENT AND INCIDENTALS NECESSARY TO COMPLETE THE WORK. ANY ADDITIONAL EXCAVATION, BACKFILL WITH SUITABLE MATERIAL AND COMPACTION WORK NECESSARY FOR THE CONCRETE MEDIAN BARRIER INSTALLATION IS TO BE CONSIDERED INCIDENTAL IN THE PRICE BID FOR THE CONCRETE MEDIAN BARRIER.

REINFORCING STEEL SCHEDULE

	BARS "A"		BARS A-1		BARS "B"		DOWELS	
PANEL	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH
TYPE I					2	19'-8"		
TYPE II	20	5'-10 1/4"	20	5'-6"	11	19'-8"	40	1'-0"
TYPE III	20	5'-10 1/4"	20	5'-6"	11	19'-8"	40	1'-0"

SPECIFICATION REFERENCE

105
404
502

CONCRETE MEDIAN BARRIER
TYPE I, II OR III

VIRGINIA DEPARTMENT OF TRANSPORTATION


VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 2

502.18

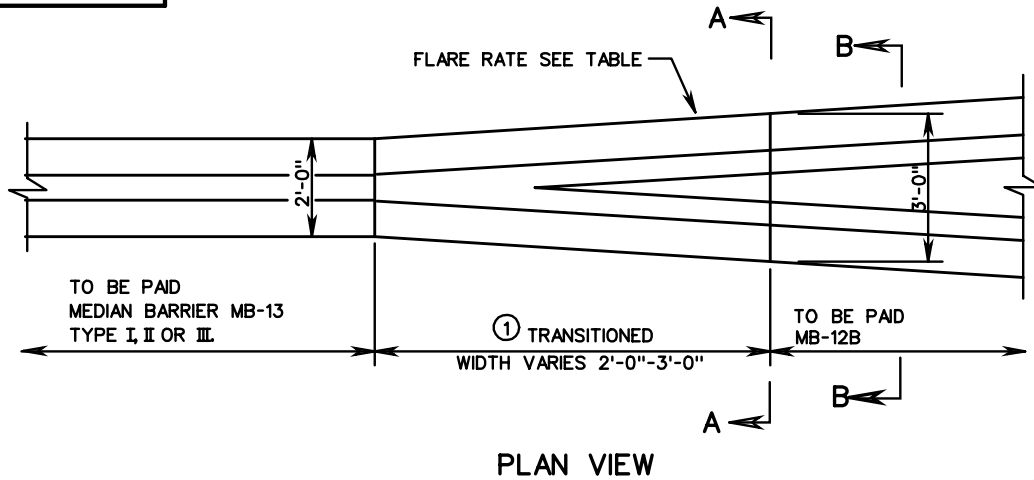

PLAN VIEW

NOTE:

REINFORCING STEEL BARS SHOWN ARE BASED ON A 20' PANEL LENGTH.

ALL REINFORCING BARS ARE TO BE SIZE #4 GRADE 60 STEEL WITH A MINIMUM 1 1/2" CONCRETE COVER.

THE TYPICAL JOINT SPACING FOR CONSTRUCTION JOINTS IS 20' AND 80' FOR EXPANSION JOINTS FOR TYPE II AND III BARRIERS.


FOR DETAILS OF HOW JOINTS ARE TO BE FORMED & WATER STOPS SEE ST'D. RW-3.

TRANSVERSE JOINTS FOR TYPE I BARRIERS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE ROAD AND BRIDGE SPECIFICATIONS EXCEPT NO SCORING OR SAWING WILL BE ALLOWED.

HORIZONTAL REINFORCING STEEL BARS B ARE TO BE SEPARATED AT ALL EXPANSION & CONTRACTION JOINTS. A 2" CONCRETE COVER IS REQUIRED OVER THE ENDS OF REINFORCING STEEL.

① TRANSITIONED TO BE PAID FOR AS MEDIAN BARRIER MB-13 TYPE I, II OR III.

② MAXIMUM FLARE RATE FOR RIGID BARRIER SYSTEMS.

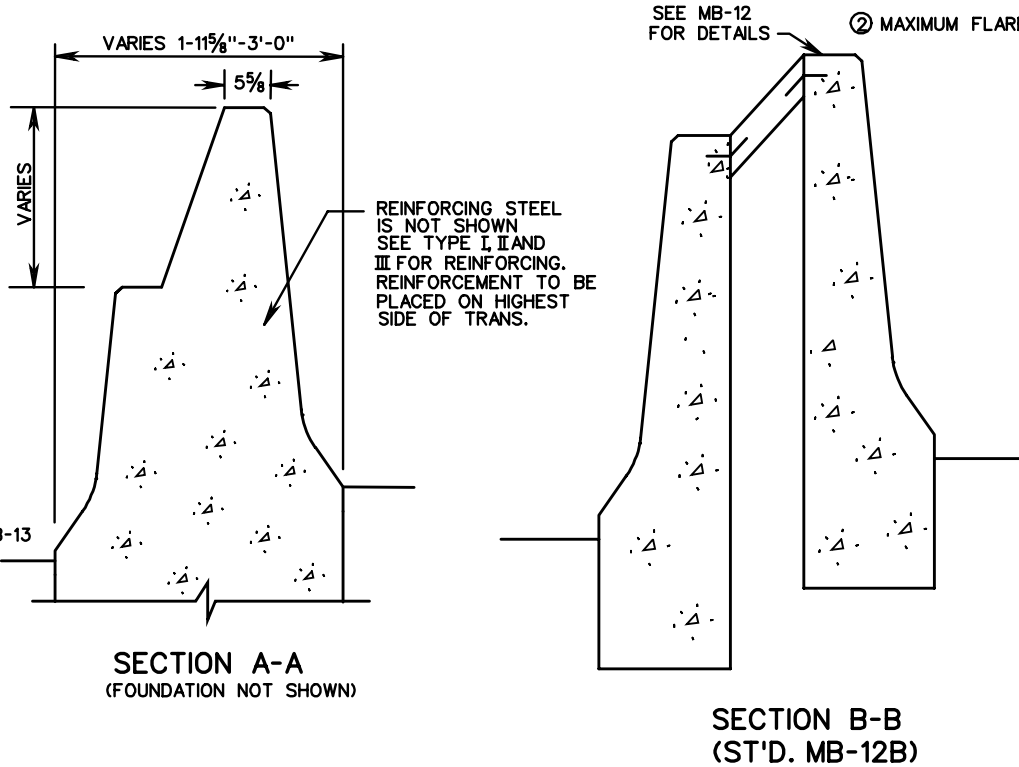

SECTION A-A
(FOUNDATION NOT SHOWN)

SECTION B-B
(ST'D. MB-12B)

FLARE RATES			
DESIGN SPEED	INSIDE SHY LINE		BEYOND SHY LINE
	SHY LINE LS	FLARE RATE	FLARE RATE
70	10'	30 : 1	20 : 1 ②
60	8'	26 : 1	18 : 1 ②
50	6.5'	21 : 1	14 : 1 ②
40	5'	16 : 1	10 : 1 ②
30	3.5'	13 : 1	8 : 1 ②



ROAD AND BRIDGE STANDARDS

SHEET 2 OF 2

REVISION DATE

502.19


CONCRETE MEDIAN BARRIER

TYPE I, II OR III

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE


105
404
502

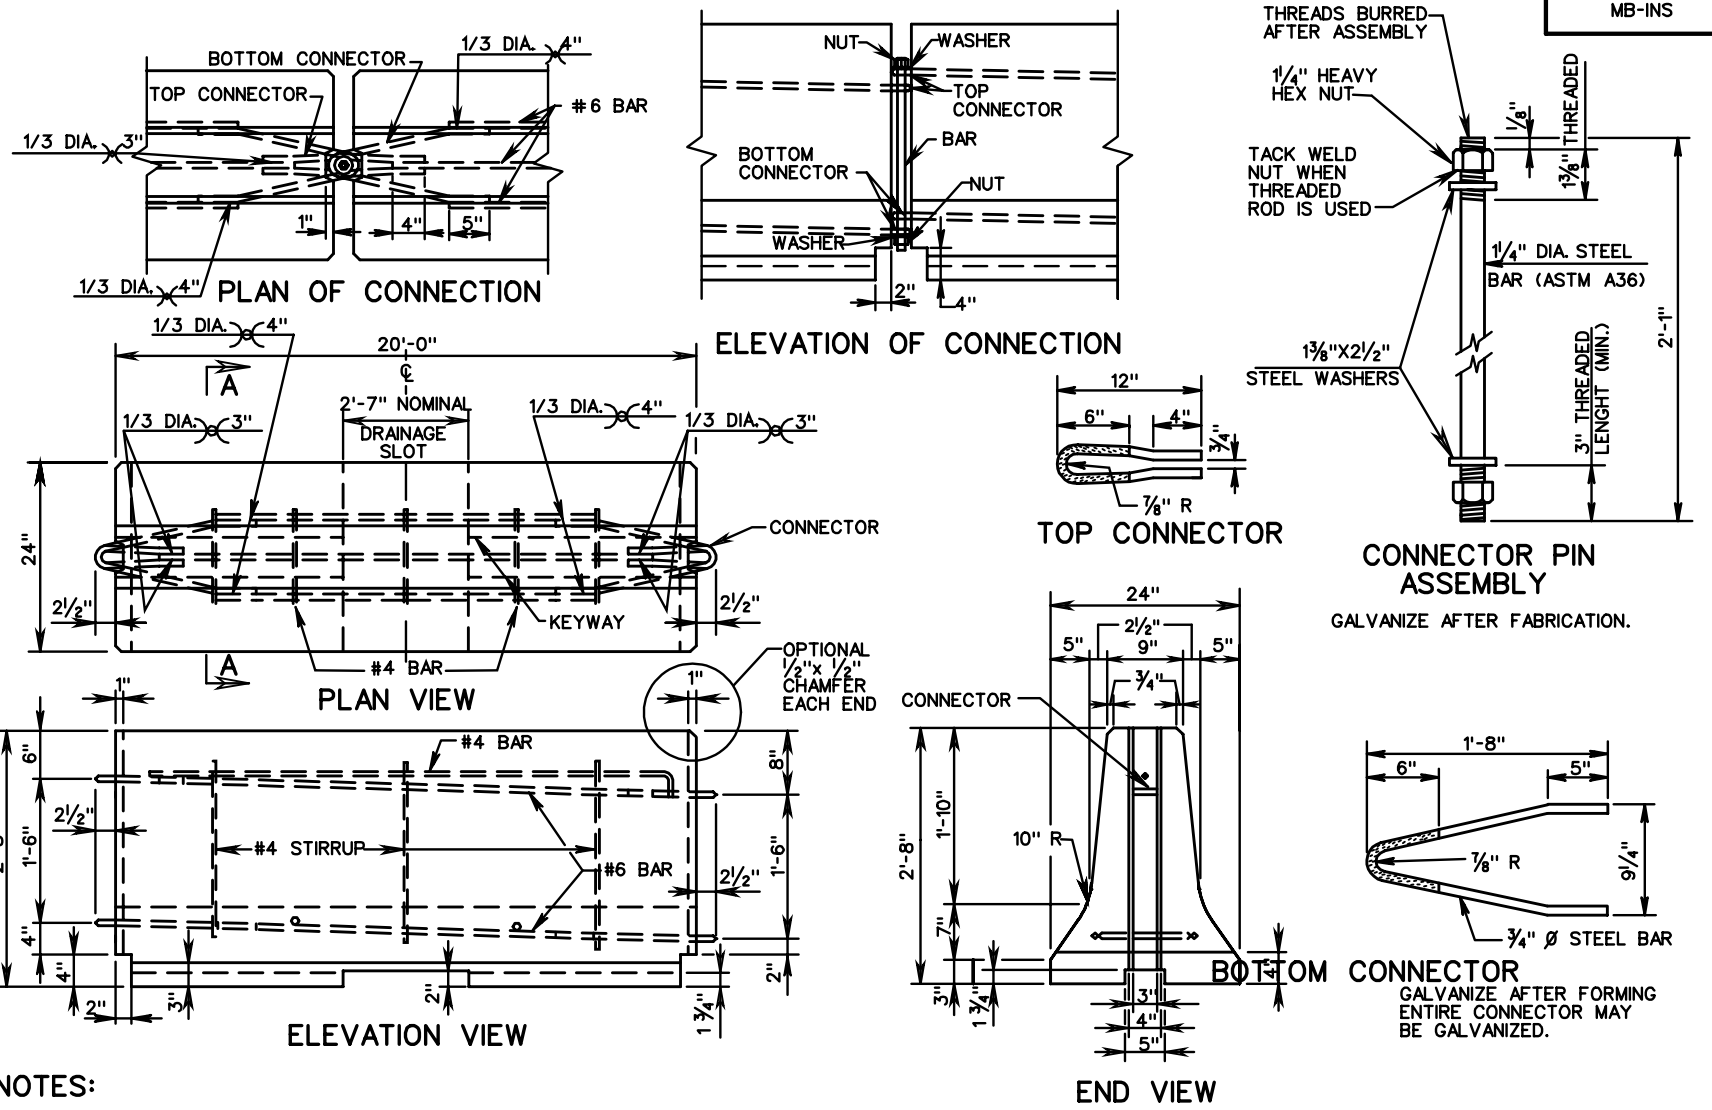

NOTES:

- PIN AND CONNECTORS ARE TO BE ASTM A-36 REINFORCING. STEEL BARS ARE TO BE ASTM A 615, GRADE 60. ONE CONNECTOR PIN ASSEMBLY WITH EACH BARRIER SECTION.
- THE CONNECTION PIN, NUTS AND WASHERS SHALL BE GALVANIZED IN ACCORDANCE WITH AASHTO M-111.
- BEGINNING WITH THE JANUARY 2000 ADVERTISEMENT, ALL POSITIVE CONNECTIONS MUST BE APPROVED BY THE FHWA IN ACCORDANCE WITH NCHRP 350 TEST REQUIREMENTS.

WHEN USING VDOT STANDARD MB-7D PC WITH THE PIN AND LOOP POSITIVE CONNECTION, ALLOW FOR A 6'-0" DYNAMIC DEFLECTION. PROVIDE MIN. 60' OF BARRIER UPSTREAM AND DOWNSTREAM OF WORK ZONE FOR ANCHORAGE. FOR APPROVED NON-VDOT DESIGNS, REFER TO MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR DEFLECTIONS AND ANCHORAGE.







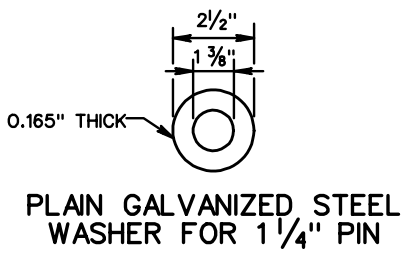


PIN AND LOOP DETAILS

**PRECAST CONCRETE MEDIAN BARRIER
POSITIVE CONNECTION OPTIONS**
VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

VDOT ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 5
502.20	

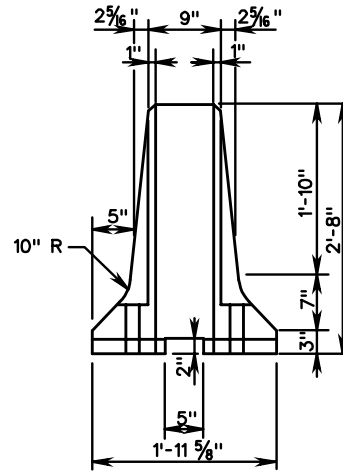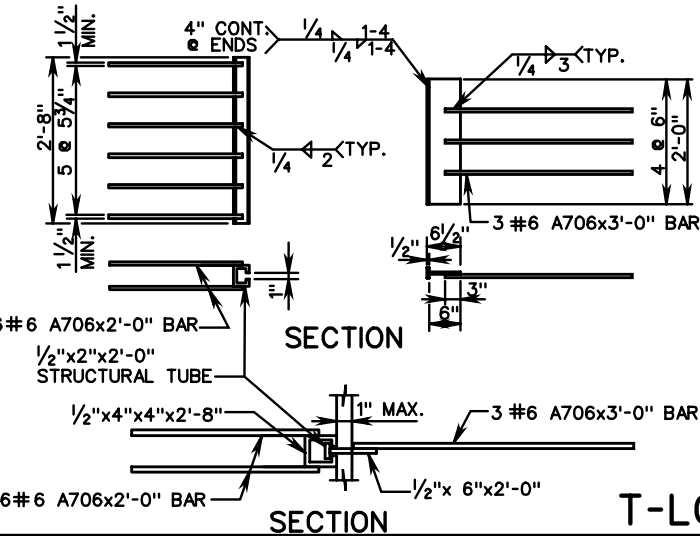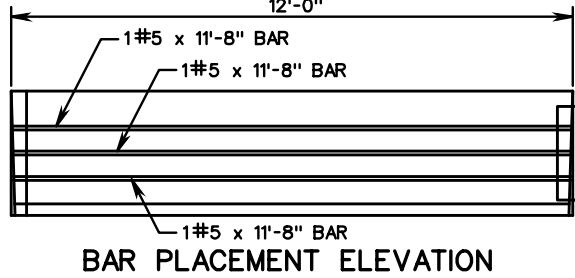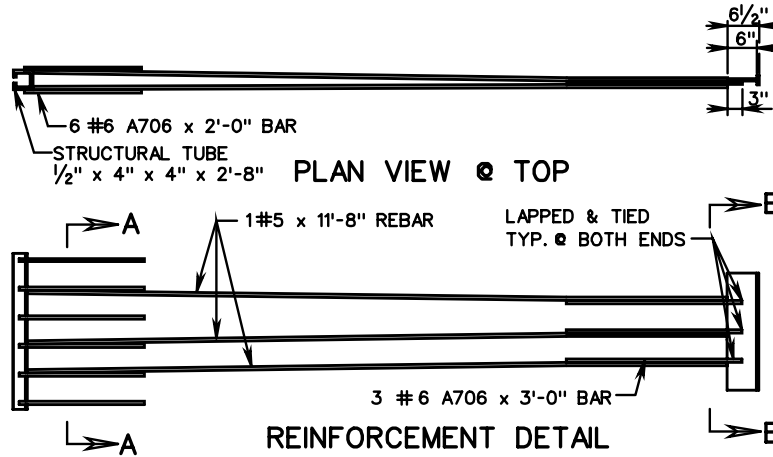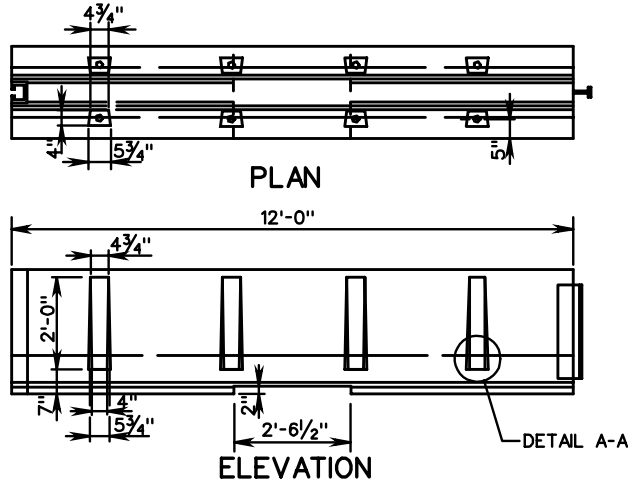

LEGEND	
•	- 11'-8" BAR
○	- 2' AND 3' BAR

NOTES:

1. MINIMUM COMPRESSIVE STRENGTH OF CONCRETE AT THE AGE OF 28 DAYS SHALL BE 4000 PSI.
2. ALL REINFORCEMENT SHALL CONFORM TO ASTM A615, GRADE 60.
3. STANDARD BARRIER SECTIONS SHALL BE 12'-0" AS SHOWN OR 18'-0". SHORTER SECTIONS SHALL BE CAST IN REQUIRED LENGTHS AS ONE UNIT. LONGER SECTIONS SHALL BE CAST TO REQUIRED DIMENSIONS IN TWO UNITS.
4. ALL EXPOSED METAL IS TO BE GALVANIZED FOR PERMANENT LOCATIONS.
5. ALL EXPOSED METAL SHALL BE GALVANIZED FOR TEMPORARY LOCATIONS.
6. T-LOK AS MANUFACTURED BY ROCKINGHAM PRECAST
7. BEGINNING WITH JANUARY 2000 ADVERTISEMENT ALL POSITIVE CONNECTIONS MUST BE APPROVED BY THE FHWA IN ACCORDANCE WITH NCHRP 350 TEST REQUIREMENTS.
8. REFER TO MANUFACTURER FOR TEMPORARY INSTALLATION DETAILS.

WHEN USING T-LOK BARRIER, ALLOW FOR A 3'-10" DYNAMIC DEFLECTION. PROVIDE MINIMUM 60' OF BARRIER UPSTREAM AND DOWNSTREAM OF WORK ZONE FOR ANCHORAGE.



ROAD AND BRIDGE STANDARDS

SHEET 2 OF 5


REVISION DATE

502.21


**PRECAST CONCRETE MEDIAN BARRIER
POSITIVE CONNECTION OPTIONS**

VIRGINIA DEPARTMENT OF TRANSPORTATION


SPECIFICATION
REFERENCE

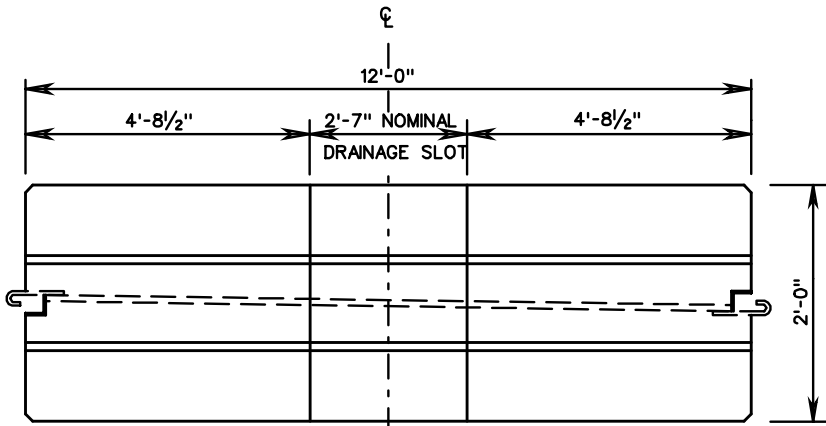


PLAN VIEW

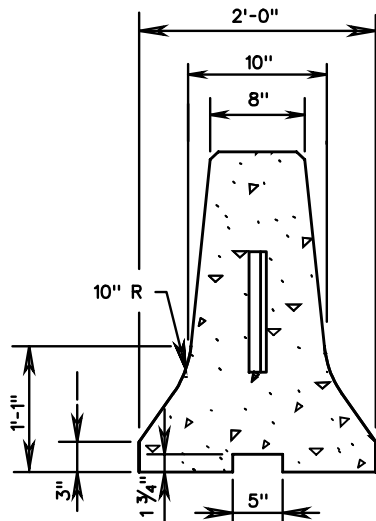


ELEVATION VIEW

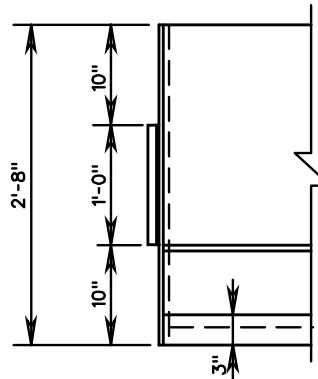

SIDE VIEW

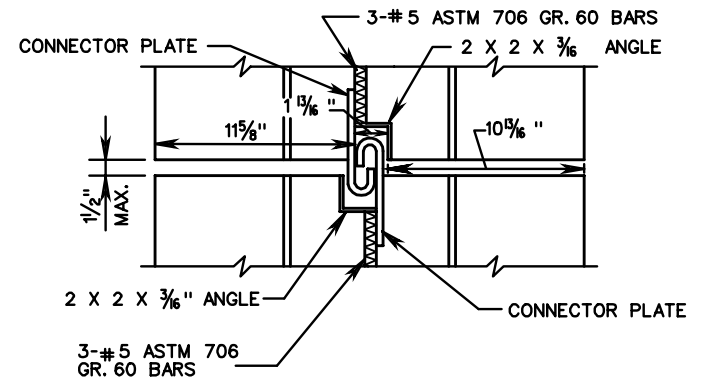

PLAN VIEW

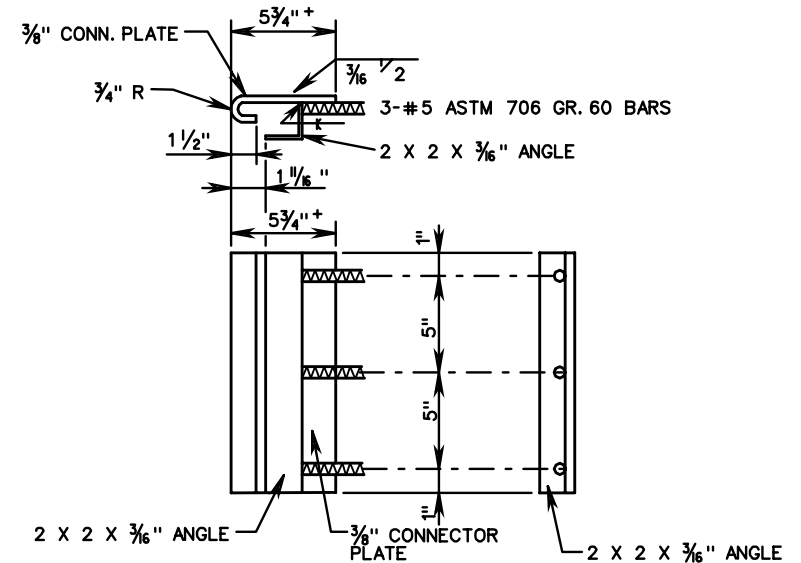

ELEVATION VIEW SIDE VIEW
CONNECTOR PLATE DETAIL

NOTES:

1. MINIMUM COMPRESSIVE STRENGTH OF CONCRETE AT THE AGE OF 28 DAYS SHALL BE 4000 PSI.
2. ALL REINFORCEMENT SHALL CONFORM TO ASTM A615, GRADE 60.
3. ALL EXPOSED METAL TO BE GALVANIZED FOR PERMANENT LOCATIONS.
4. ALL EXPOSED METAL SHALL BE GALVANIZED FOR TEMPORARY LOCATIONS.
5. J-J HOOK AS MANUFACTURED BY SMITH-MIDLAND.
6. BEGINNING WITH JANUARY 2000 ADVERTISEMENT ALL POSITIVE CONNECTIONS MUST BE APPROVED BY THE FHWA IN ACCORDANCE WITH NCHRP 350 TEST REQUIREMENTS.
7. REFER TO MANUFACTURER FOR TEMPORARY INSTALLATION DETAILS.

WHEN USING J-J HOOK BARRIER, ALLOW FOR A 4'-4" DYNAMIC DEFLECTION. PROVIDE A MIN. 69'-7" OF BARRIER UPSTREAM AND DOWNSTREAM OF WORK ZONE FOR ANCHORAGE.

J-J HOOK[®] DETAILS

PRECAST CONCRETE MEDIAN BARRIER
POSITIVE CONNECTION OPTIONS
VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE


VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE


SHEET 3 OF 5

502.22

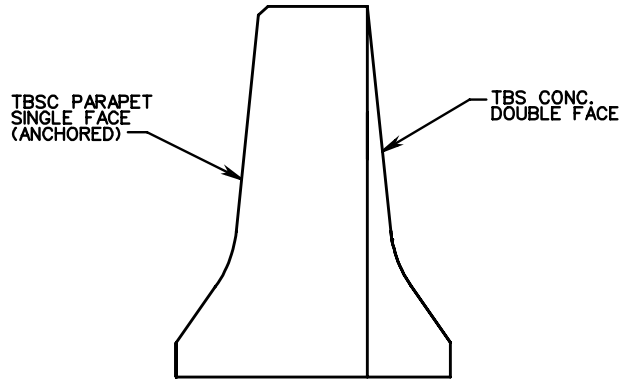


SECTION B-B


- NOTES:
1. BASIS OF PAYMENT:
TRAFFIC BARRIER SERVICE LATERAL SUPPORT WILL BE MEASURED AND PAID FOR IN UNITS OF EACH COMPLETE IN PLACE AND SHALL INCLUDE FURNISHING AND PLACING PRECAST CONCRETE BARRIERS (TBS CONCRETE) AND SAND BAGS, MAINTENANCE, REMOVAL WHEN NO LONGER NECESSARY, AND ALL MATERIALS, LABOR, TOOLS, EQUIPMENTS, AND INCIDENTALS NECESSARY TO COMPLETE THE WORK.
 2. FOR POSITIVE CONNECTION DETAILS AND DIMENSIONS SEE STANDARD MB-INS, SHEETS 502.20 - 502.22
 3. FOR DIMENSIONS NOT SHOWN, REFER TO ST'D. MB-7D AND MB-10A.

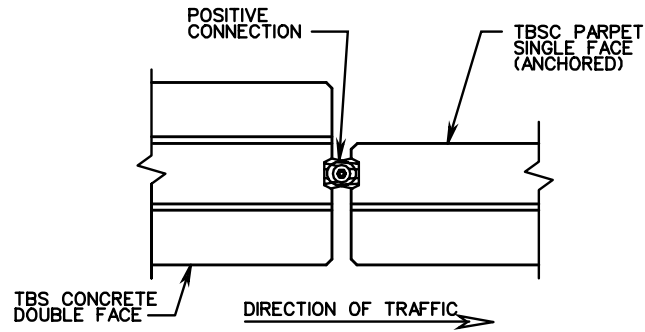

PLAN OF POSITIVE CONNECTION

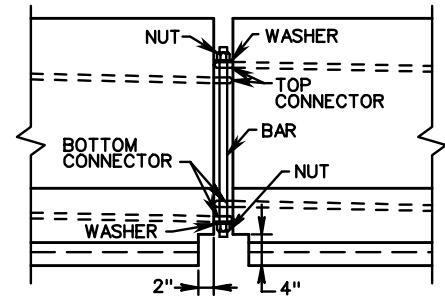

ELEVATION OF POSITIVE CONNECTION

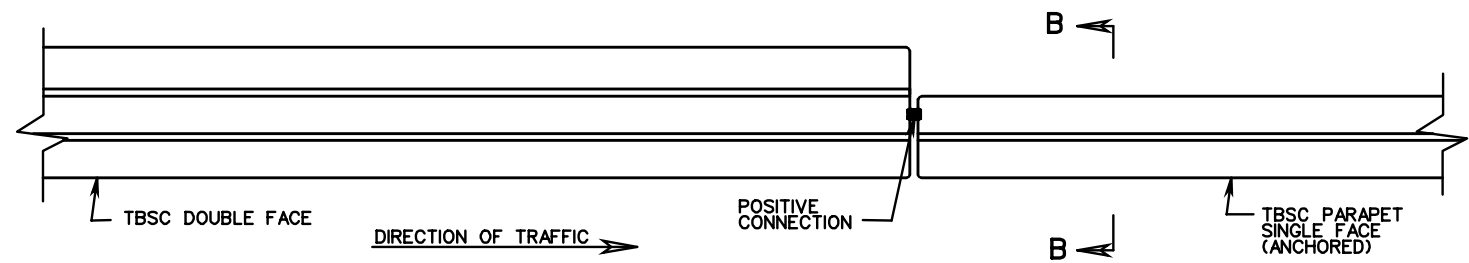


PLAN VIEW METHOD A

VDOT	
ROAD AND BRIDGE STANDARDS	
SHEET 4 OF 5	REVISION DATE
502.23	

**BUTTING TRAFFIC BARRIER SERVICE
TO SINGLE FACE PARAPET SERVICE**

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

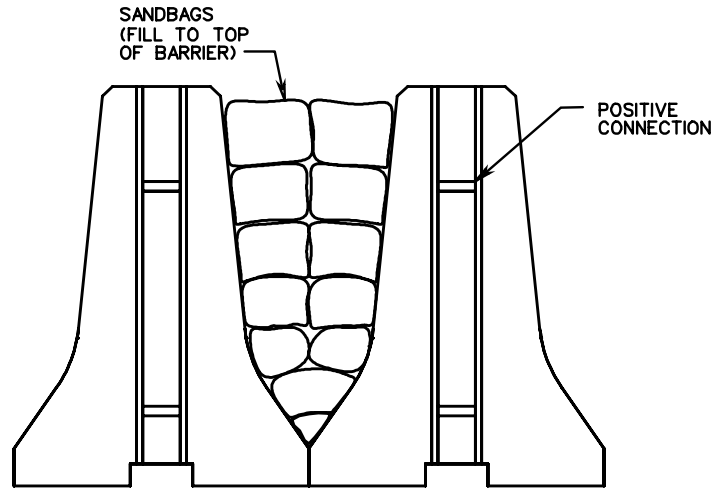


SECTION A-A



NOTES:

1. BASIS OF PAYMENT:
TRAFFIC BARRIER SERVICE LATERAL SUPPORT WILL BE MEASURED AND PAID FOR IN UNITS OF EACH COMPLETE IN PLACE AND SHALL INCLUDE FURNISHING AND PLACING PRECAST CONCRETE BARRIERS (TBS CONCRETE) AND SAND BAGS, MAINTENANCE, REMOVAL WHEN NO LONGER NECESSARY, AND ALL MATERIALS, LABOR, TOOLS, EQUIPMENTS, AND INCIDENTALS NECESSARY TO COMPLETE THE WORK.
2. FOR POSITIVE CONNECTION DETAILS AND DIMENSIONS SEE STANDARD MB-INS, SHEETS 502.20 - 502.22
3. FOR DIMENSIONS NOT SHOWN, REFER TO ST'D. MB-7D AND MB-10A.

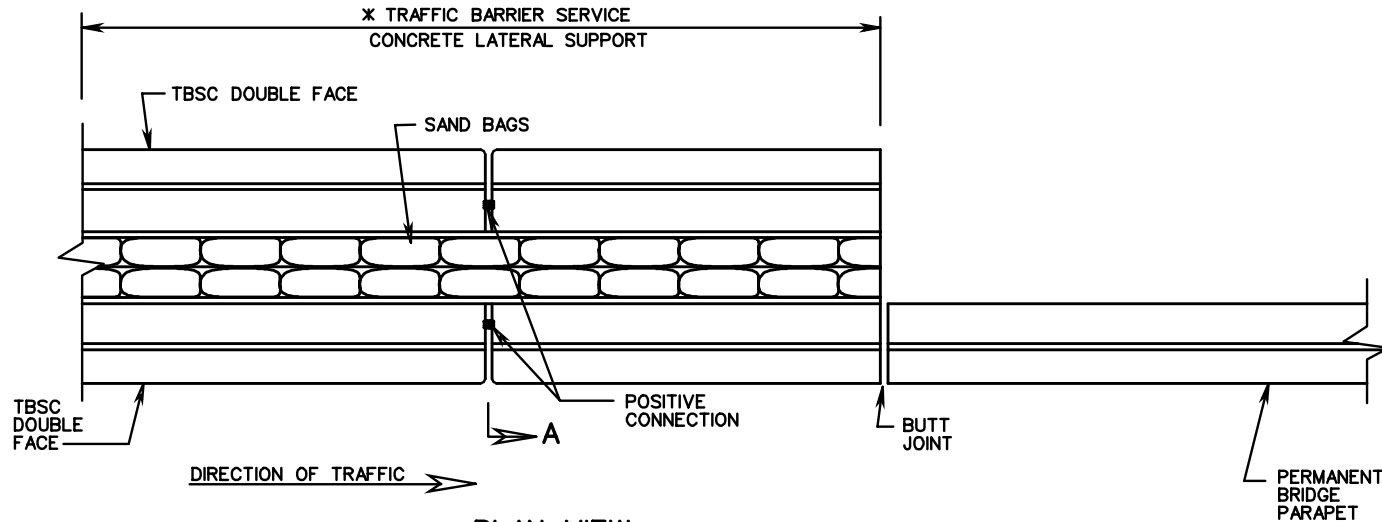

PLAN VIEW
METHOD B

* FILL LENGTH OF TBS LATERAL SUPPORT WITH SAND BAGS.

SPECIFICATION
REFERENCE

**BUTTING TRAFFIC BARRIER SERVICE
TO SINGLE FACE PARAPET SERVICE**

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 5 OF 5

502.24

THIS PAGE INTENTIONALLY LEFT BLANK



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

502.25

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION
REFERENCE

GENERAL NOTES - FENCING

FARM FENCE

BARBED WIRE

BARBED WIRE IS TO CONFORM TO ONE OF THE TYPES ALLOWED BY THE SPECIFICATIONS. UNLESS OTHERWISE NOTED ON PLANS FOUR STRANDS WILL BE PROVIDED. SPACING OF STRANDS SHOWN IS SUGGESTED ONLY. ANY OTHER SPACING APPROVED BY THE ENGINEER MAY BE USED.

WOOD POSTS

WOOD POSTS TO BE SQUARE CUT OR ROUND TO THE DIMENSIONS SHOWN ON THE DRAWINGS.

POSTS TOPS MAY BE FLAT OR CUT AT A 30° ANGLE.

FOR WOVEN WIRE FABRIC, STAPLES ARE TO BE USED AT TOP AND BOTTOM STRANDS AND AT A MINIMUM OF THREE INTERMEDIATE STRANDS PER POST.

ONE STAPLE PER STRAND IS TO BE USED FOR BARBED WIRE FENCE.

WHERE GATE, CORNER, OR BRACE POSTS FALL IN ROCK OR MARSHY AREAS THEY SHALL BE SET IN CLASS A3 OR C1 CONCRETE.

METAL POSTS

METAL POSTS ARE TO BE ONE OF THE TYPES SHOWN ON THE STANDARD DRAWINGS AND CONFORMING TO THE SPECIFICATIONS.

AT EACH CORNER AND STRETCHER POST WIRE FABRIC IS TO BE CUT AND ALL HORIZONTAL STRANDS SECURELY WRAPPED AROUND POST.

BRACES ON CORNER, STRETCHER AND END POSTS ARE TO BE SECURED 1'-6" FROM TOP OF POST WITH 1/2" BOLTS.

IN LIEU OF SETTING POSTS IN CONCRETE, MANUFACTURER'S ANCHORING DEVICES MEETING THE SPECIFICATION REQUIREMENTS MAY BE USED WHEN APPROVED BY THE ENGINEER.

BRACES

MAXIMUM SPACING BETWEEN BRACES TO BE 500'.

CORNER BRACES TO BE PROVIDED WHERE CORNER ANGLE IS 15° OR OVER.

LINE BRACES TO BE PROVIDED WHERE VERTICAL ALIGNMENT CHANGES 15° OR MORE AND WHERE SPACING REACHES 500'.

MISCELLANEOUS

FENCE IS TO BE LOCATED AS SHOWN ON THE PLANS OR DIRECTED BY THE ENGINEER.

THE SIDE OF THE POST TO WHICH FABRIC IS TO BE ATTACHED WILL BE DETERMINED BY THE ENGINEER.

FENCE TO BE GROUNDED IN ACCORDANCE WITH DETAIL SHOWN ON STANDARD FE-6 WHERE REQUIRED.

UNLESS SPECIFIED ON PLANS, THE CONTRACTOR WILL HAVE THE OPTION OF FURNISHING EITHER METAL OR WOOD POSTS. POSTS TYPES ARE NOT TO BE INTERMIXED ON ANY ONE INSTALLATION.

CHAIN LINK FENCE

WIRE FABRIC

WIRE FABRIC SHALL HAVE A 2" MESH.

MISCELLANEOUS

IN LIEU OF SETTING POSTS IN CONCRETE, MANUFACTURER'S ANCHORING DEVICES MEETING THE SPECIFICATION REQUIREMENTS MAY BE USED WHEN APPROVED BY THE ENGINEER.

FOR GATES EXCEEDING 6'-0" IN WIDTH ROLLED FORMED STEEL POST WILL NOT BE ALLOWED.

CHAIN LINK FENCE TO BE GROUNDED IN ACCORDANCE WITH DETAILS SHOWN ON STANDARD FE-6, WHERE REQUIRED.

SPECIFICATION
REFERENCE

STANDARD FENCE GENERAL NOTES

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE


SHEET 1 OF 1

503.01


FE-W1,W2

CORNER BRACE

WOOD POST

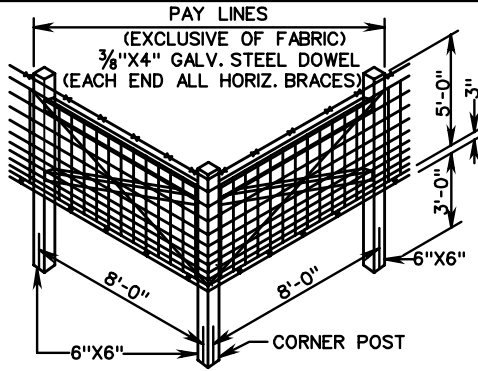


LINE BRACE

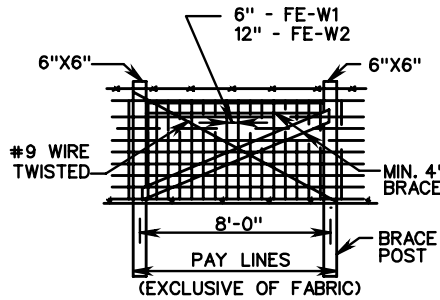

LINE BRACE AT END LOCATION

THE BRACE WIRE TO BE PLACED AROUND POSTS WITH ONE WIRE ON EACH SIDE OF BRACE. WIRE TO BE DRAWN TAUT BY TWISTING BETWEEN BRACE AND EACH POST. THIS APPLIES TO ALL BRACE WIRES.




DIAGONAL 4" BRACES TO BE PLACED IN DIRECTION OF PULL. POST TO BE NOTCHED FOR DIAGONAL 4" BRACES. ALL 4" DIAGONAL BRACES TO HAVE TWO GALVANIZED 12D NAILS EACH END.

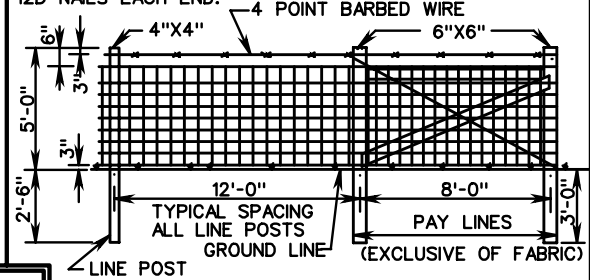

IF NOT OTHERWISE NOTED DIMENSIONS AND DESCRIPTIONS SHOWN ON ONE DRAWING APPLY TO OTHER DETAILS WITH THE SAME POST TYPE.

METAL POST

* L2/2X2/2X1/4 POST WITH 2X2X3/8X7'-0" BRACES OR 2 1/2" O.D. POST @ 3.65 ± 5% LBS./FT. WITH 1 5/8" O.D. BRACES @ 2.2 ± 5% LBS./FT.

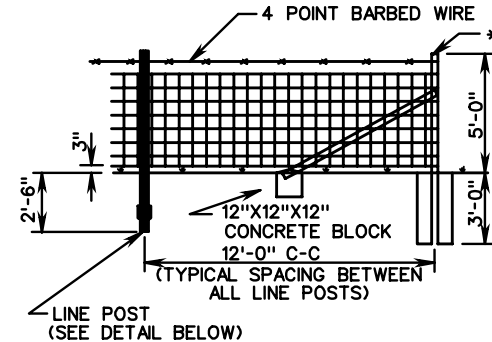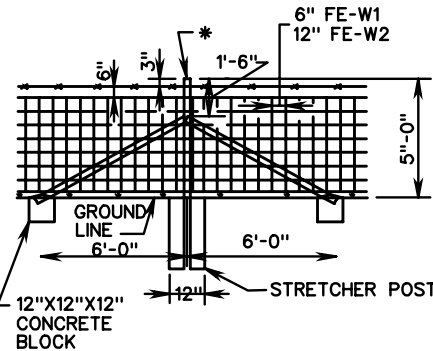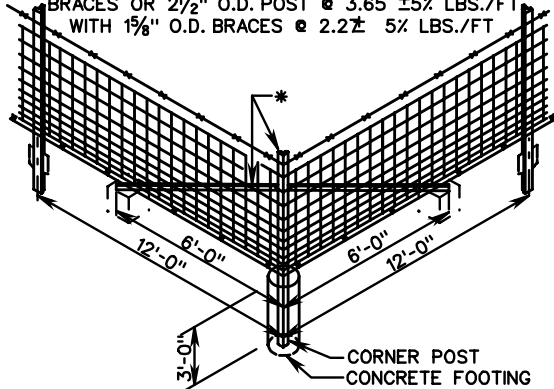


NOTES:

SEE GENERAL NOTES-FENCING FOR ADDITIONAL DETAILS AND INSTRUCTIONS.

LINE POSTS ARE TO BE OF THE TYPES SHOWN OR EQUIVALENT MEETING THE APPROVAL OF THE ENGINEER.


ALL POSTS ARE TO HAVE A MINIMUM WEIGHT OF 1.25 LBS./FT.

A MINIMUM OF FIVE CLAMPS FOR ATTACHING FABRIC TO POST ARE TO BE INCLUDED IN COST OF EACH LINE POST.



FLANGED FLANGE TYPE "U" TYPE "T"


METAL LINE POST




FOR USE IN LIEU OF SETTING POSTS IN CONCRETE. DEVICES SHOWN ARE REPRESENTATIONAL ONLY. SEE GENERAL NOTES.

ALTERNATE ANCHOR DEVICES

L2X2X3/8 TO BE CUT TO FIT AROUND L2/2X2/2X1/4 STRETCHER POST.



L2/2X2/2X1/4, 2" LONG BRACKET BOLTED TO STRETCHER POST



ALTERNATE

METHOD OF ATTACHING ANGLE BRACES TO STRETCHER POSTS



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

503.02



**STANDARD FENCE
WOVEN WIRE FABRIC**

VIRGINIA DEPARTMENT OF TRANSPORTATION


SPECIFICATION REFERENCE

242
507
236

		CORNER BRACE	LINE BRACE	LINE BRACE AT END LOCATION	FE-B
WOOD POST			<p>DIAGONAL 4" BRACE TO BE PLACED IN DIRECTION OF PULL.</p> <p>POST TO BE NOTCHED FOR DIAGONAL 4" BRACES. ALL DIAGONAL 4" BRACES TO HAVE TWO GALVANIZED 12D NAILS AT EACH END.</p>	<p>THE BRACE WIRE TO BE PLACED AROUND POSTS WITH ONE WIRE ON EACH SIDE OF BRACE. WIRE TO BE DRAWN TAUT BY TWISTING BETWEEN BRACE AND EACH POST. THIS APPLIES TO ALL BRACE WIRES.</p>	
		<p>IF NOT OTHERWISE NOTED DIMENSIONS AND DESCRIPTIONS SHOWN ON ONE DRAWING APPLY TO OTHER DETAILS WITH THE SAME POST TYPE.</p>			
METAL POST		<p>* L2½X2½X¼ POST WITH L2X2X¾X7'-0" BRACES OR 2½" O.D. POST @ 3.65±5% LBS./FT. WITH 1½" O.D. BRACES @ 2.27 ± 5% LBS./FT.</p>			
		<p>FLANGED "U" TYPE</p> <p>"T" TYPE</p> <p>LINE POSTS ARE TO BE OF THE TYPES SHOWN OR EQUIVALENT MEETING THE APPROVAL OF THE ENGINEER.</p> <p>ALL POSTS ARE TO HAVE A MINIMUM WEIGHT OF 1.25 LBS./FT.</p> <p>A MINIMUM OF FIVE CLAMPS FOR ATTACHING FABRIC TO POST ARE TO BE INCLUDED IN COST OF EACH LINE POST.</p> <p>NOTES: SEE GENERAL NOTES FENCING FOR ADDITIONAL DETAILS AND INSTRUCTIONS.</p> <p>METAL LINE POST</p>	<p>L2X2X¾ TO BE CUT TO FIT AROUND L2½X2½X¼ STRETCHER POST.</p> <p>L2½X2½X¼, 2" LONG BRACKET BOLTED TO STRETCHER POST</p> <p>ALTERNATE</p> <p>METHOD OF ATTACHING ANGLE BRACES TO STRETCHER POSTS</p>	<p>FOR USE IN LIEU OF SETTING POSTS IN CONCRETE. DEVICES SHOWN ARE REPRESENTATIONAL ONLY. SEE GENERAL NOTES.</p> <p>ALTERNATE ANCHOR DEVICES</p>	
SPECIFICATION REFERENCE	STANDARD FENCE			VDOT	
242	BARBED WIRE			ROAD AND BRIDGE STANDARDS	
507	VIRGINIA DEPARTMENT OF TRANSPORTATION			REVISION DATE	SHEET 1 OF 1
236					503.03

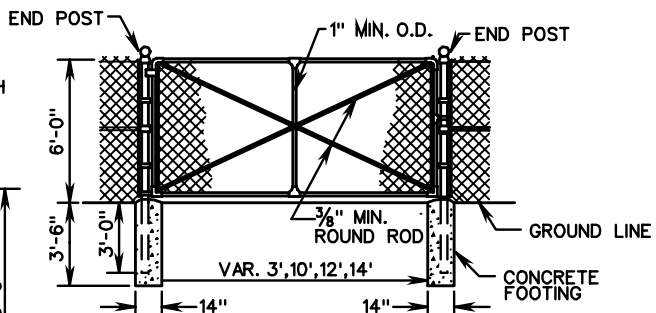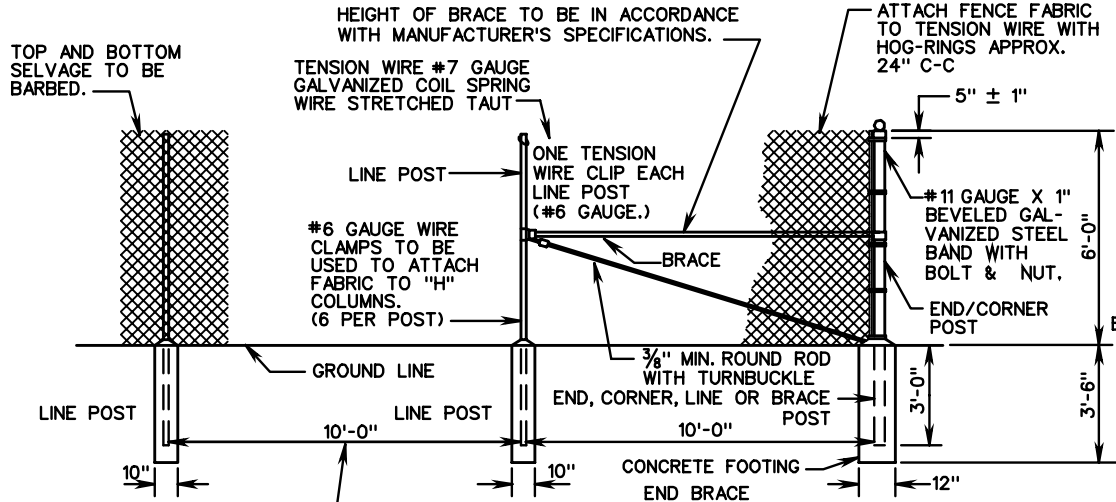

SINGLE SWING GATE


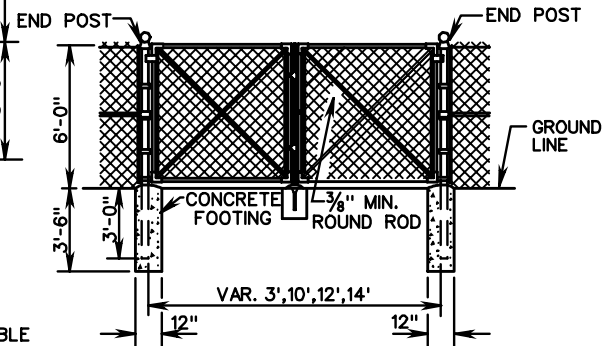


DOUBLE SWING GATE

(TO BE USED WHERE SWINGING CLEARANCE IS LIMITED)

NOTES:
 SEE GENERAL NOTES-FENCING FOR ADDITIONAL DETAILS AND INSTRUCTIONS
 A MOISTURE-EXCLUDING CAP IS REQUIRED ON TUBULAR POSTS.
 MATERIAL FOR CAP SHALL CONFORM TO THE ALLOWABLE TYPES FOR OTHER LISTED FILLINGS.
 CORNER BRACE - TO BE USED WHEN HORIZONTAL ALIGNMENT CHANGES 15° OR MORE.
 SEE END BRACE SHOWN ABOVE FOR BRACE DETAILS.


POST TYPE	SCHEDULE 40, NOMINAL PIPE SIZES
LINE POST	2.00"
END/CORNER POST	2.50"
GATE POST (SINGLE SWING)	3.50"
GATE POST (DOUBLE SWING)	2.50"
BRACE	1.25"
GATE FRAME	1.50"

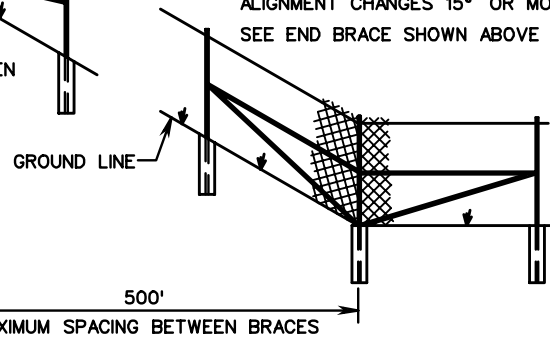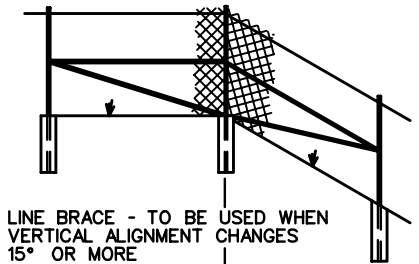


LINE BRACE - TO BE USED WHEN VERTICAL ALIGNMENT CHANGES 15° OR MORE


500'
 MAXIMUM SPACING BETWEEN BRACES

ALTERNATE ANCHOR DEVICES MAY BE USED IN LIEU OF SETTING POST IN CONCRETE. DEVICES SHOWN ARE REPRESENTATIONAL ONLY. SEE GENERAL NOTES.




FITTINGS SHOWN ARE SUGGESTED ONLY. SIMILAR DESIGNS MEETING THE APPROVAL OF THE ENGINEER MAY BE USED.

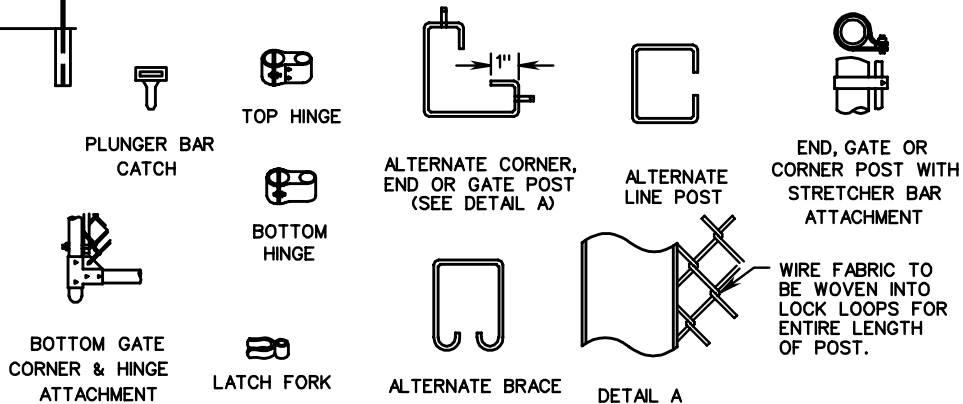

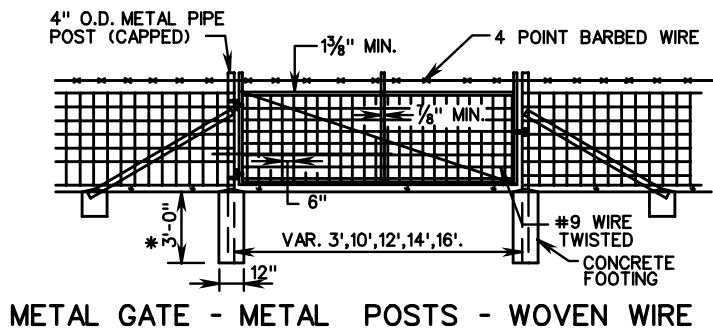


METAL GATE - METAL POSTS - WOVEN WIRE

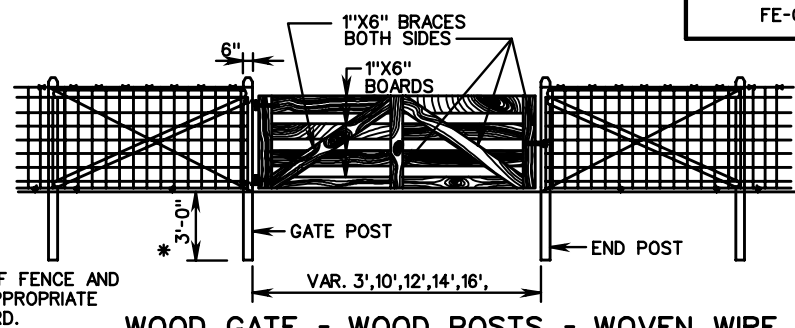

WOOD GATE - WOOD POSTS - WOVEN WIRE


* IF GATE WIDTH EXCEEDS 12', GATE POST IS TO BE SET 3'-6" INTO GROUND HEIGHT OF GATE POST ABOVE GROUND DEPENDS ON TYPE OF FENCE USED- 5'-0", WOVEN WIRE FABRIC, 4'-6", BARBED WIRE.

FOR DETAILS OF FENCE AND BRACES SEE APPROPRIATE FENCE STANDARD.

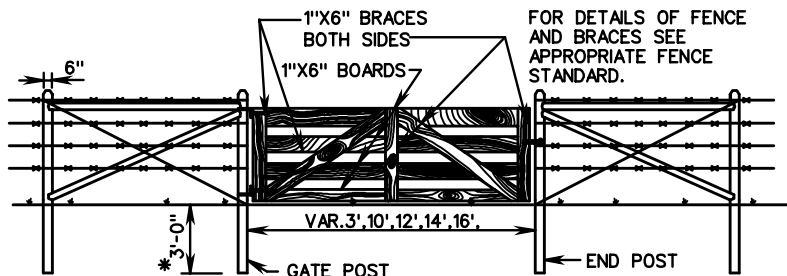

WOOD GATE - WOOD POSTS - BARBED WIRE

FOR DETAILS OF FENCE AND BRACES SEE APPROPRIATE FENCE STANDARD.

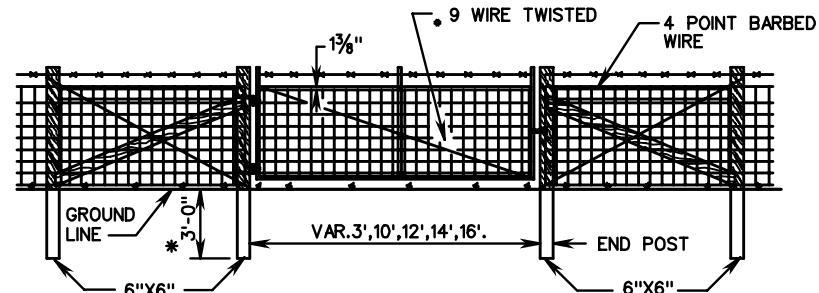

METAL GATE - WOOD POSTS - WOVEN WIRE

WOOD GATE

BRACES ARE TO BE BOLTED AT EXTREMITIES AND INTERSECTIONS WITH A MIN. OF (2) 5/8" DIA. GALV. BOLTS, NUTS, AND WASHERS. ALL OTHER POINTS OF CONTACT ARE TO BE NAILED FROM BOTH SIDES WITH A MIN. OF 3-10D GALV. NAILS.

LUMBER FOR GATE IS TO BE ANY DRESSED, TRUE TYPE MEETING THE APPROVAL OF THE ENGINEER IT IS TO BE TREATED WITH PRESERVATIVES OTHER THAN CREOSOTE.

WOOD GATE IS TO HAVE TWO COATS OF EXTERIOR WHITE PAINT UNLESS OTHERWISE DIRECTED BY THE ENGINEER. PAINT IS TO MEET THE REQUIREMENTS OF THE CURRENT ROAD AND BRIDGE SPECIFICATIONS.

METAL GATE

GATE FRAME AND CENTER BRACE TO BE TO THE DIMENSIONS SHOWN ON THE DRAWING EXCEPT THAT A 3" WIDTH GATE CAN HAVE A MIN. 1" FRAME WITH NO CENTER BRACE.

GATE IS TO BE HOT DIPPED GALVANIZED OR ELECTROPLATE GALVANIZED IN ACCORDANCE WITH ASTM A-164 TYPE GS.

GATE FABRIC IS TO BE ALL #11 GAUGE EXCEPT TOP AND BOTTOM STRANDS WHICH ARE TO BE #9 VERTICAL STRANDS ARE TO BE SPACED 6" APART.


MISCELLANEOUS

IF LOCATIONS OF GATES ARE NOT SPECIFIED ON PLANS, THEY ARE TO BE ERECTED AT THE SITES DESIGNATED BY THE ENGINEER.


GATE HINGE AND LATCH ASSEMBLIES MAY BE OF ANY TYPE MEETING THE APPROVAL OF THE ENGINEER, EXCEPT THAT ALL HINGES ARE TO BE OF A BOLT-THROUGH TYPE. ALL FITTINGS ARE TO BE HOT DIPPED GALVANIZED.

ANY COMBINATION OF GATE AND FENCE TYPES MEETING THE APPROVAL OF THE ENGINEER WILL BE ACCEPTABLE AND IS NOT LIMITED TO THE EXAMPLES SHOWN HEREON.

WHERE WOOD GATES POSTS FALL IN ROCK OR MARSHY AREAS THEY ARE TO BE SET IN CLASS A3 OR C1 CONCRETE.



HINGE BOLT
(2 REQ'D)



HINGE CLAMP
(2 REQ'D)

SUGGESTED HINGE ASSEMBLY

SPECIFICATION REFERENCE

242
507
236

STANDARD FENCE GATES

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT


ROAD AND BRIDGE STANDARDS

REVISION DATE


SHEET 1 OF 1

503.05

FE-4


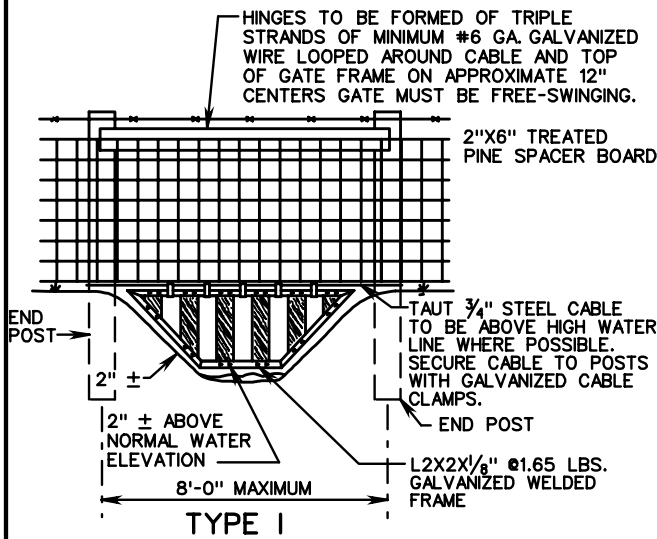


TYPE I

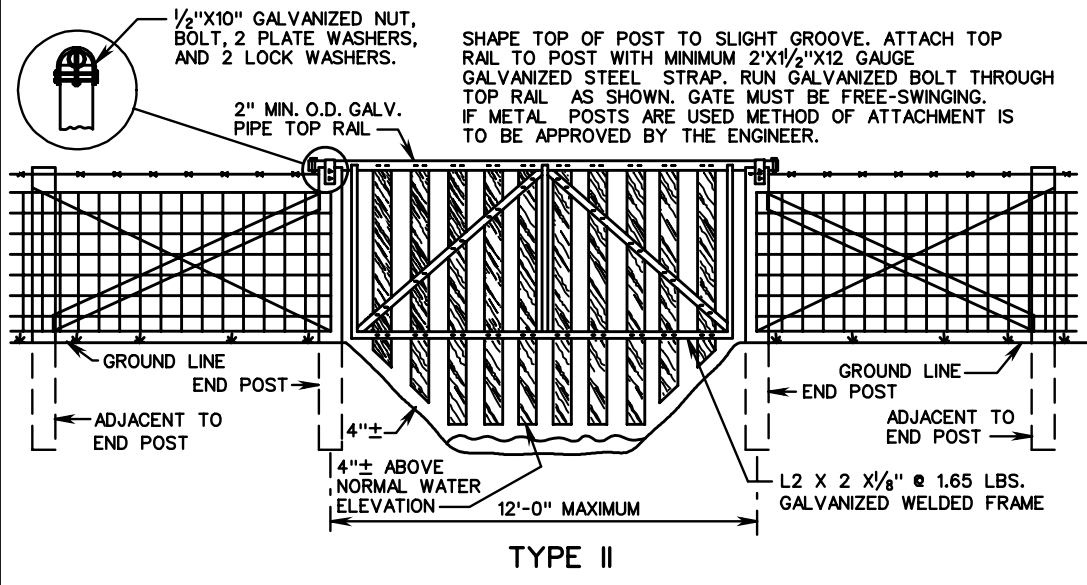

TYPE II

METHOD OF FASTENING FILLER BOARDS TO ANGLE IRON FRAME (TYPE I, TYPE II AND TYPE III)

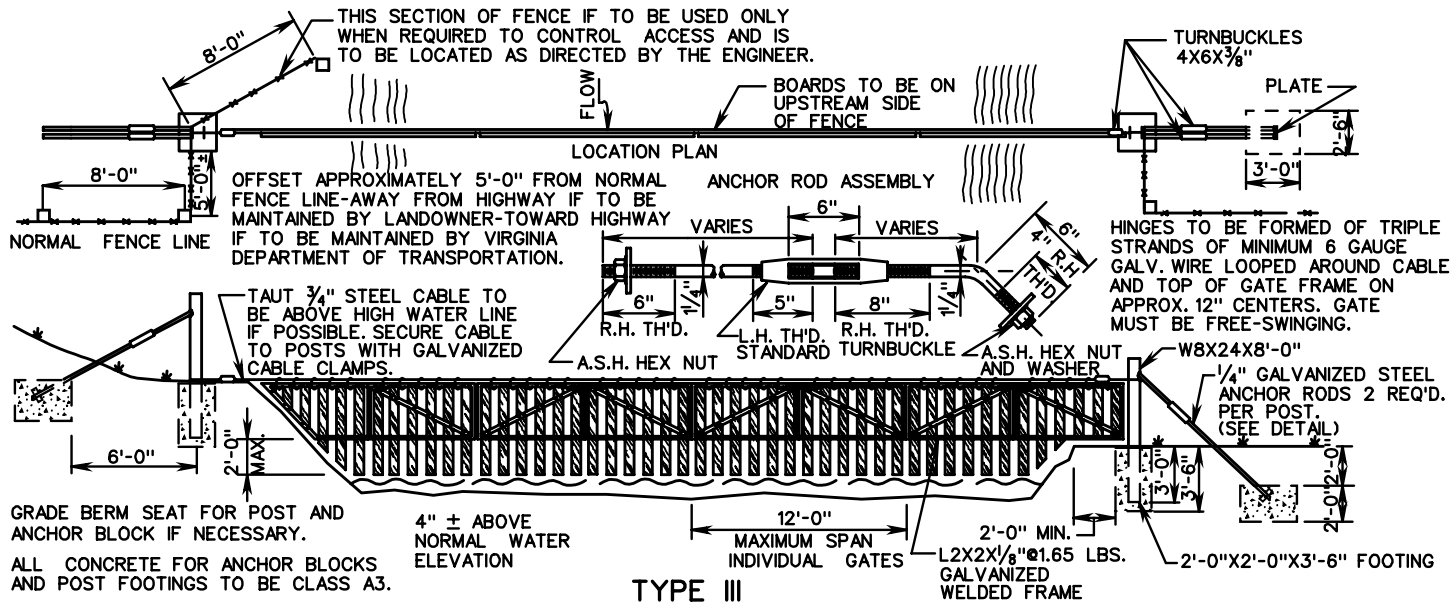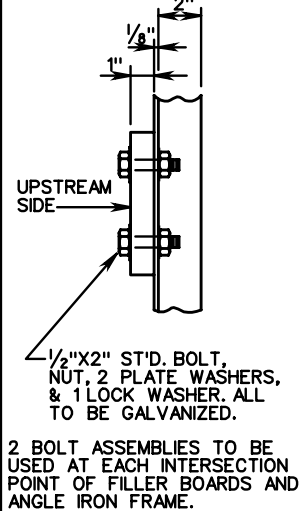

TYPE III

NOTES: WATER GATES MAY BE USED WITH STANDARD FE-W1, FE-W2 OR FE-B FENCE. GATE IS TO BE FABRICATED TO CONFORM TO INDIVIDUAL CHANNEL REQUIREMENTS. WOOD FILLER BOARDS TO BE 1" TREATED PINE BOLTED TO FRAME. SMOOTH WOOD SIDE IS TO FACE UPSTREAM. TYPE I GATE IS TO HAVE TWO 8" END POSTS AS SPECIFIED FOR THE TYPE OF FENCE USED. THE ADJACENT TO END POST AND BRACING MAY BE ELIMINATED. TYPE II GATE IS TO HAVE TWO 8" END POSTS, ADJACENT TO END POSTS, BRACING, ETC. AS SPECIFIED FOR THE TYPE OF FENCE USED.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE


503.06

WATER GATES IN FENCE LINES


VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

242
507
236

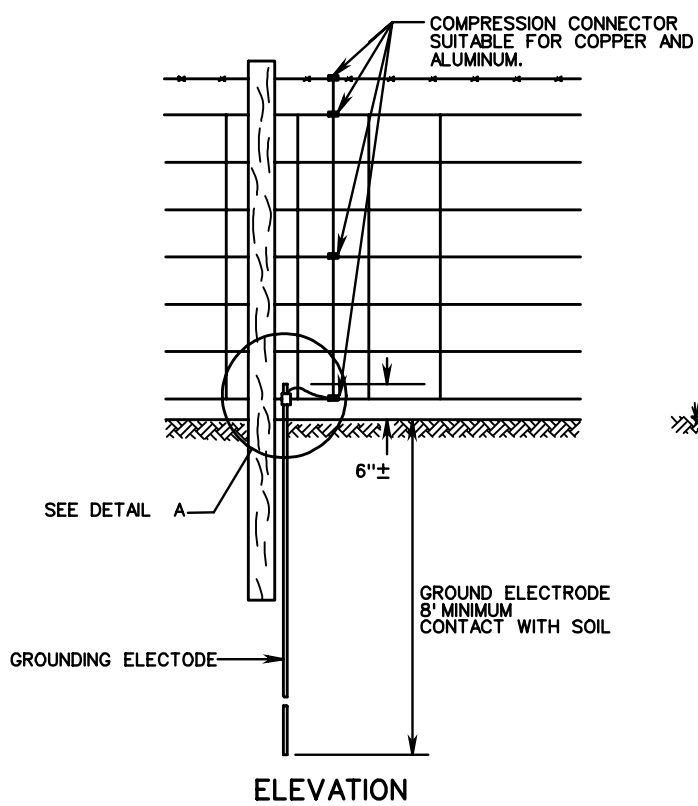

FOR CHAIN LINK FENCE GROUNDING, SEE DETAIL BELOW.

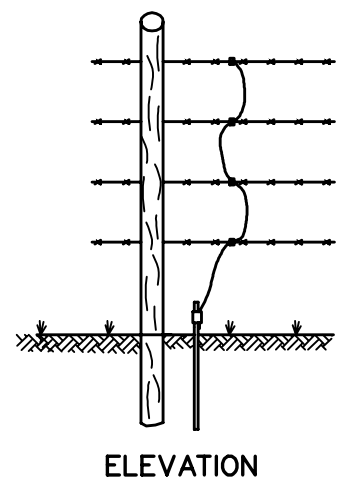

NOTES:
 APPROXIMATE MATERIALS PER INSTALLATION:
 1-3/4" DIAMETER BY 10'-0" LONG COPPER CLAD GROUNDING ELECTRODE.
 1 GROUNDING ELECTRODE CLAMP
 1-7'-0" # 6 AWG SOLID COPPER CONDUCTOR
 3* COMPRESSION CONNECTORS (SUITABLE FOR COPPER AND ALUMINUM)

* MINIMUM 3 CONNECTORS FOR 47" FENCE FABRIC TO BE SECURED TO TOP, BOTTOM AND ONE INTERMEDIATE HORIZONTAL WIRE STRAND. ONE ADDITIONAL CONNECTOR TO BE FURNISHED FOR EACH STRAND OF BARBED WIRE.

ON BARBED WIRE INSTALLATIONS, ONE CONNECTOR IS TO BE FURNISHED FOR EACH STRAND.

GROUNDING CONDUCTOR IS TO BE IN CONTACT WITH HORIZONTAL WIRE OF FENCE BY COMPRESSION CONNECTORS AS SHOWN.

GROUNDING ELECTRODE TO BE LOCATED ON POST SIDE OF FENCE AND AS CLOSE AS POSSIBLE TO POST AND FENCE.



UNLESS OTHERWISE CALLED FOR IN THE PLANS OR DIRECTED BY THE ENGINEER, FENCE GROUNDING WILL BE REQUIRED FOR METAL FENCES INCLUDING PLASTIC COATED FENCE FABRIC AT THE FOLLOWING LOCATIONS.

-WHEN HIGH VOLTAGE LINES CROSS ABOVE THE FENCE. GROUNDING SYSTEMS SHALL BE INSTALLED 50' BEYOND THE OVERHEAD CROSSING POINT OF THE OUTER MOST CONDUCTORS OF THE HIGH VOLTAGE LINES.

-WHEN THE HIGH VOLTAGE LINES ARE PARALLEL TO AND WITHIN 50' HORIZONTALLY OF THE FENCE. GROUNDING SYSTEMS SHALL BE INSTALLED AT 50' INTERVALS ALONG THE PARALLEL SECTIONS OF FENCE AND HIGH VOLTAGE LINES.


COST FOR FURNISHING AND PLACING ALL GROUNDING MATERIALS IS TO BE INCLUDED IN PRICE BID PER LINEAR FOOT OF FENCE.

DETAILS SHOWN HEREON ARE TO APPLY TO ALL METAL FENCES AND HANDRAILS. FENCES WILL BE GROUNDED ONLY WHEN INDICATED ON THE PLANS OR AS RECOMMENDED BY THE ENGINEER.

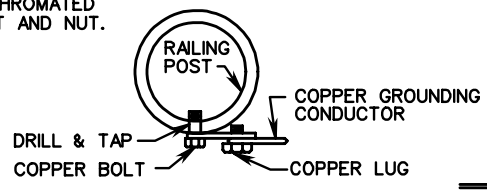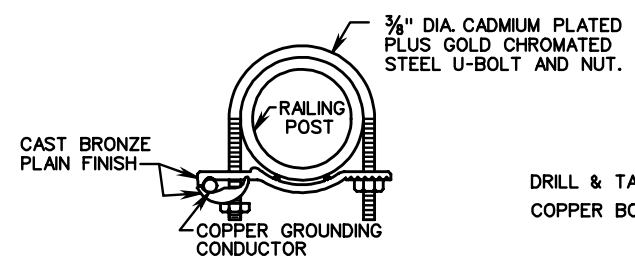

ALTERNATE

CHAIN LINK FENCE SHALL 3 CONNECTIONS FOR EACH GROUNDING CONDUCTOR/ELECTRODE: ONE CLAMP CONNECTION AT POST BASE AND TWO COMPRESSION CONNECTORS ON THE CHAIN LINK AT MIDDLE AND TOP.

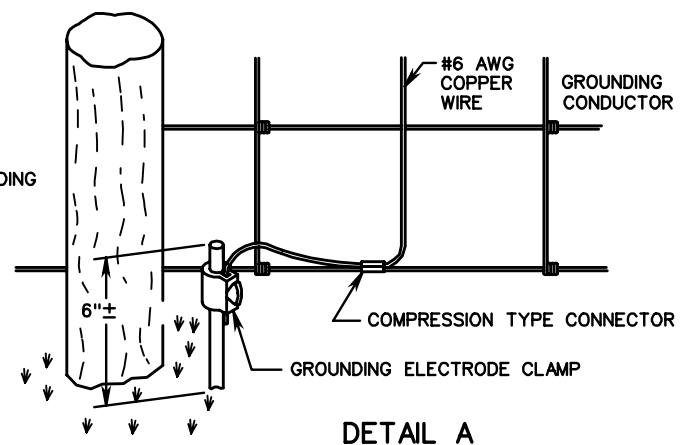

DETAIL A



DETAIL FOR GROUNDING STEEL POST OF CHAIN LINK FENCE & HANDRAIL (HR-1)

SPECIFICATION REFERENCE
507 238

STANDARD METHOD OF FENCE & HANDRAIL GROUNDING


VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
503.07	

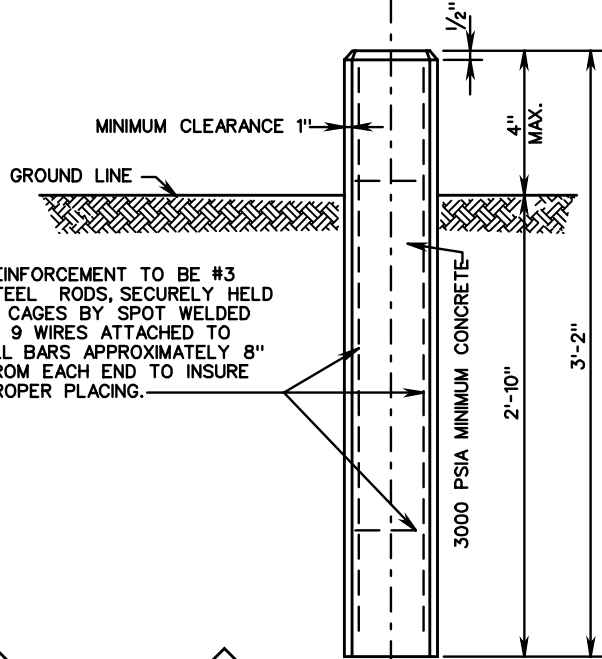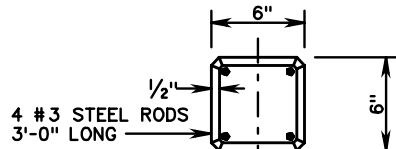


REINFORCEMENT TO BE #3 STEEL RODS, SECURELY HELD IN CAGES BY SPOT WELDED W 9 WIRES ATTACHED TO ALL BARS APPROXIMATELY 8" FROM EACH END TO INSURE PROPER PLACING.

CENTER OF BACK OF MONUMENT TO BE CORRECT FOR STATION AND ALIGNMENT.

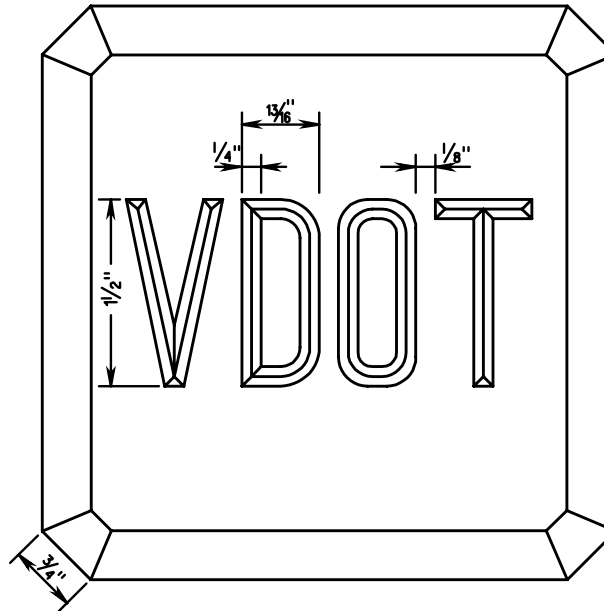


NOTES:
THE LETTERS "VDOT" ARE TO BE INDENTED IN THE TOP OF EACH RIGHT-OF-WAY MONUMENT.
IN ENTRANCES AND YARDS WHERE THE MONUMENTS WOULD BE UNSIGHTLY, THEY MAY BE SET WITH THE TOP FLUSH WITH THE GROUND.


ALTERNATE METHODS OF PLACING WIRES



ALL LETTERING TO BE 1/2" STANDARD FOUNDRY LETTERS.

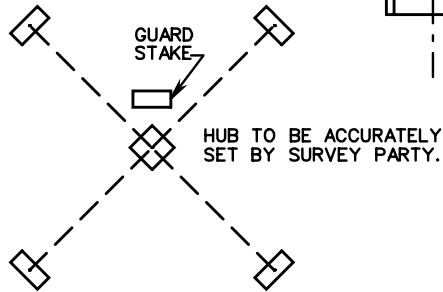

BEFORE HUB IS DISTURBED IN SETTING MONUMENTS FOUR LINER STAKES ARE TO BE SET, SO THAT TWO LINES STRETCHED BETWEEN STAKES WILL INTERSECT EXACTLY OVER TACK IN HUB. TOPS OF STAKES TO BE MORE THAN 9" ABOVE GROUND AT MONUMENT.

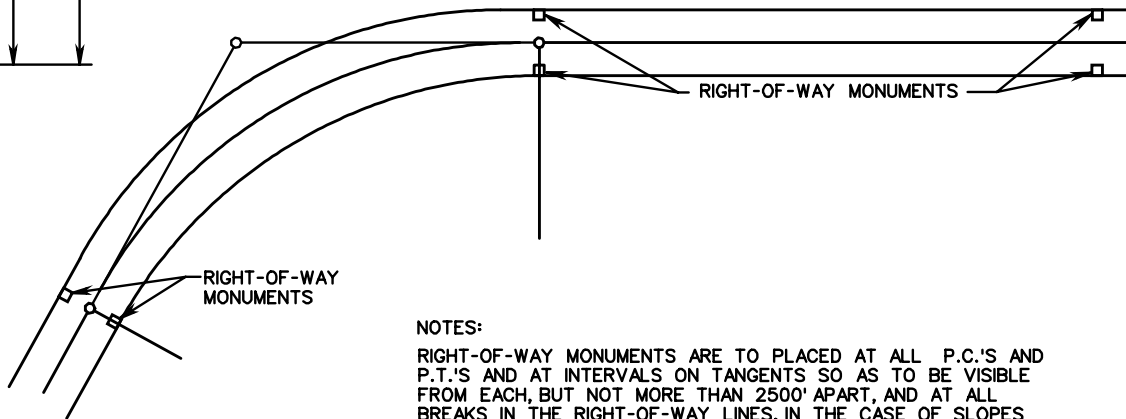

NOTES:
RIGHT-OF-WAY MONUMENTS ARE TO BE PLACED AT ALL P.C.'S AND P.T.'S AND AT INTERVALS ON TANGENTS SO AS TO BE VISIBLE FROM EACH, BUT NOT MORE THAN 2500' APART, AND AT ALL BREAKS IN THE RIGHT-OF-WAY LINES. IN THE CASE OF SLOPES ACQUIRED AS EASEMENT, THE MONUMENTS ARE TO BE SET ON NORMAL RIGHT-OF-WAY LINES.

RIGHT-OF-WAY MONUMENTS ARE TO BE SET PLUMB.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE



504.01

STANDARD PLAN AND METHOD OF SETTING RIGHT-OF-WAY MONUMENTS

VIRGINIA DEPARTMENT OF TRANSPORTATION


SPECIFICATION REFERENCE

503

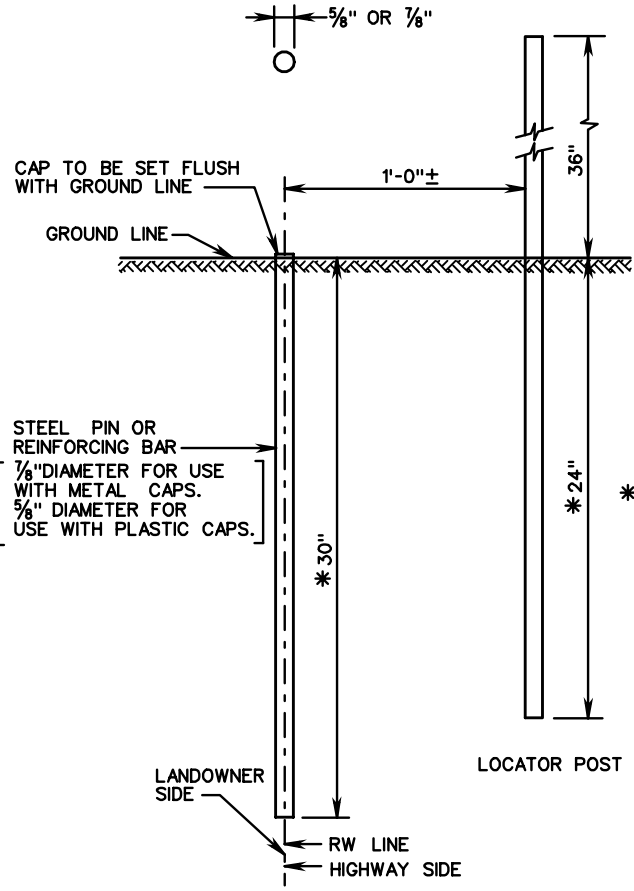

METAL CAP IS TO BE CADMIUM PLATED BRASS OR STAINLESS STEEL, SECURED WITH ROUND HEAD, DRIVE SCREW #4 X 3/16" TYPE U.

METAL CAP DETAIL



PLASTIC CAP IS TO BE HIGH VISIBILITY ORANGE WITH STAMPED, BLACK LETTERS.

PLASTIC CAP DETAIL

CAPS TO BE FURNISHED BY VDOT

* DEPTH OF PIN AND LOCATOR POST IN THE GROUND MAY BE LENGTHENED OR SHORTENED TO FIT CONDITIONS.


STEEL PIN OR REINFORCING BAR
 [7/8" DIAMETER FOR USE WITH METAL CAPS.
 5/8" DIAMETER FOR USE WITH PLASTIC CAPS.]

NOTES:

LOCATOR POST TO BE U-TYPE ROLLED RAIL STEEL @ 2 LBS./FT. OR ALUMINUM ALLOY 6063-T6 @ 0.78 LBS./FT. IN ACCORDANCE WITH THE SPECIFICATIONS.


STEEL POSTS TO BE GALVANIZED IN ACCORDANCE TO ASTM A123.

LOCATOR POST AND PIN TO BE SET BY THE SURVEY PARTY AT THE TIME OF ORIGINAL STAKING.



PIN TO BE ACCURATELY SET BY SURVEY PARTY AND CAP PUNCHED TO INDICATE R/W LINE.

LOCATOR POST IS TO BE ELIMINATED IN URBAN AREAS.

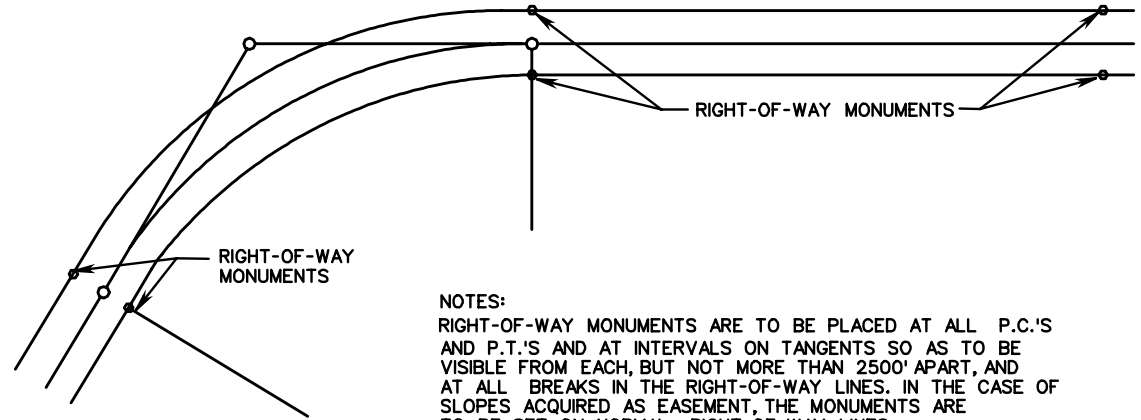

NOTES:

RIGHT-OF-WAY MONUMENTS ARE TO BE PLACED AT ALL P.C.'S AND P.T.'S AND AT INTERVALS ON TANGENTS SO AS TO BE VISIBLE FROM EACH, BUT NOT MORE THAN 2500' APART, AND AT ALL BREAKS IN THE RIGHT-OF-WAY LINES. IN THE CASE OF SLOPES ACQUIRED AS EASEMENT, THE MONUMENTS ARE TO BE SET ON NORMAL RIGHT-OF-WAY LINES.

RIGHT-OF-WAY MONUMENTS ARE TO BE SET PLUMB.

SPECIFICATION REFERENCE

219
503

STANDARD PLAN AND METHOD OF SETTING RIGHT-OF-WAY MONUMENTS

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

504.02

THIS PAGE INTENTIONALLY LEFT BLANK



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

504.03

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION
REFERENCE