

STANDARD	TITLE	PAGE
TC-5.01, 5.04	EXPLANATION OF TABLES AND INSTRUCTIONS FOR USE (GENERAL CONDITIONS)	802.01
TC-5.01, 5.04	TRANSITION CURVES FOR RURAL AND URBAN HIGHWAYS AND STREET CONDITIONS	802.02
TC-5.01	EXPLANATION OF TABLES AND INSTRUCTIONS FOR USE (RURAL CONDITIONS)	802.03
TC-5.01, 5.04	EXPLANATION OF TABLES AND INSTRUCTIONS FOR USE (URBAN CONDITIONS)	802.04
TC-5.01, 5.04	DETAIL FOR TRANSITIONED $\beta$ RURAL CONDITION WITH PAVEMENT WIDENING	802.05
	DETAIL FOR NON-TRANSITION $\beta$ URBAN AND RURAL CONDITIONS W/OUT PAVEMENT WIDENING	802.06
	DETAIL OF SUPERELEVATION ABOUT BASELINE	802.07
	DETAIL OF SUPERELEVATION ABOUT BASELINE	802.08
	EXAMPLE FOR FOUR LANE ROADWAYS	802.09
	CROSS SECTION - FOUR LANE ROADWAY	802.10
	METHOD OF APPLYING TC-5.01 ON COMPOUND CURVES RURAL CONDITIONS WITH PAVEMENT WIDENING	802.11
	METHOD OF APPLYING TC-5.01 ON REVERSE CURVES RURAL CONDITION WITH PAVEMENT WIDENING	802.12
	METHOD OF APPLYING TC-5.01 ON COMPOUND CURVES URBAN AND RURAL CONDITIONS WITHOUT PAVEMENT WIDENING	802.13
	METHOD OF APPLYING TC-5.01 ON REVERSE CURVES URBAN AND RURAL CONDITIONS WITHOUT PAVEMENT WIDENING	802.14
	CROWN TRANSITION / TANGENT RUNOUT ( $L_t$ ) TABLE	802.15
	SUPERELEVATION RUNOFF ( $L_r$ ) TABLE I (URBAN AND RURAL CONDITIONS WITHOUT PAVEMENT WIDENING)	802.16
	SUPERELEVATION RUNOFF ( $L_r$ ) TABLE II (RURAL CONDITIONS WITH PAVEMENT WIDENING)	802.17
	DESIGN SUPERELEVATION RATES URBAN CONDITIONS	802.18
	DESIGN SUPERELEVATION RATES RURAL CONDITIONS	802.19
	SHEET INTENTIONALLY LEFT BLANK	802.20
	METHODOLOGIES FOR CALCULATING TC-5.01 VALUES	802.21
	CALCULATED TC-5.01 EXAMPLES	802.22
	SUMMARY OF STANDARD TC-5.04 ULS URBAN LOW SPEED DESIGN FACTORS	802.23
	TRANSITION CURVES - URBAN 20 MPH DESIGN SPEED	802.24
	TRANSITION CURVES - URBAN 25 MPH DESIGN SPEED	802.25
	TRANSITION CURVES - URBAN 30 MPH DESIGN SPEED	802.26
	TRANSITION CURVES - URBAN 35 MPH DESIGN SPEED	802.27
	TRANSITION CURVES - URBAN 40 MPH DESIGN SPEED	802.28
	TRANSITION CURVES - URBAN 45 MPH DESIGN SPEED	802.29
	TRANSITION CURVES - URBAN 50 MPH DESIGN SPEED	802.30
	TRANSITION CURVES - URBAN 55 MPH DESIGN SPEED	802.31
	TRANSITION CURVES - RURAL 20 MPH DESIGN SPEED	802.32
	TRANSITION CURVES - RURAL 25 MPH DESIGN SPEED	802.33
	TRANSITION CURVES - RURAL 30 MPH DESIGN SPEED	802.34
	TRANSITION CURVES - RURAL 35 MPH DESIGN SPEED	802.35
	TRANSITION CURVES - RURAL 40 MPH DESIGN SPEED	802.36

INDEX OF SHEETS  
SECTION 800-TRANSITION CURVES

VIRGINIA DEPARTMENT OF TRANSPORTATION



ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 2

800.01

STANDARD	TITLE	PAGE
TC-5.01	TRANSITION CURVES - RURAL 45 MPH DESIGN SPEED	802.37
	TRANSITION CURVES - RURAL 50 MPH DESIGN SPEED	802.38
	TRANSITION CURVES - RURAL 55 MPH DESIGN SPEED	802.39
	TRANSITION CURVES - RURAL 60 MPH DESIGN SPEED	802.40
	TRANSITION CURVES - RURAL 65 MPH DESIGN SPEED	802.41
	TRANSITION CURVES - RURAL 70 MPH DESIGN SPEED	802.42



ROAD AND BRIDGE STANDARDS

SHEET 2 OF 2

REVISION DATE

800.02

## INDEX OF SHEETS SECTION 800-TRANSITION CURVES

VIRGINIA DEPARTMENT OF TRANSPORTATION

## GENERAL CONDITION

ALL ORIGINAL CROSS SECTIONS SHALL BE TAKEN FROM THE BASELINE AT STATIONS, PLUS FIFTIES, AND UNUSUAL BREAKS IN THE GROUND AS ON TANGENT ALIGNMENT.

WHERE A PART OR ALL OF A SUPERELEVATION TRANSITION CURVE FALLS ON A VERTICAL CURVE, ELEVATIONS ON THE VERTICAL CURVE SHOULD BE COMPUTED FOR THE POSITIONS GIVEN ON SHEET 802.15 FOR CROWN TRANSITIONS, SHEET 802.16 FOR URBAN PROJECTS AND SHEET 802.17 FOR RURAL PROJECTS. THESE ELEVATIONS AND PLUSES SHOULD BE SHOWN ON THE PLANS FOR THE CONVENIENCE OF THE SURVEY PARTY IN STAKING OUT THE PROJECT. THROUGHOUT THESE SECTIONS OF THE GRADE, ELEVATIONS AT EVEN STATIONS AND PLUS FIFTIES SHOULD BE OMITTED.

SLOPE STAKES SHOULD BE SET AT THE POSITIONS ON THE TRANSITION GIVEN ON SHEETS 802.16, 802.17 AND 802.18 AND GROUND CROSS SECTIONS TAKEN AT THESE POSITIONS OMITTING THE STATIONS AND PLUS FIFTIES THROUGHOUT THE TRANSITION. IF UNUSUAL BREAKS IN THE GROUND OCCUR, ADDITIONAL SECTIONS SHOULD, OF COURSE, BE TAKEN. ADDITIONAL SECTIONS SHOULD ALSO BE TAKEN WHERE LOCATION IS THROUGH ROCK CUT IN ANTICIPATION OF UNUSUAL BREAKAGE WHICH MAY OCCUR DURING CONSTRUCTION.

AFTER ROUGH GRADING HAS BEEN DONE, FINE GRADING (BLUE TOP) AND FORM STAKES SHOULD BE SET AT THE POSITIONS GIVEN ON SHEET 802.15 FOR CROWN TRANSITIONS, SHEET 802.16 FOR URBAN PROJECTS OR AS GIVEN ON SHEET 802.17 FOR RURAL PROJECTS.

FINAL CROSS SECTIONS SHOULD, OF COURSE, BE TAKEN AT THOSE POSITIONS AT WHICH THE SLOPE STAKE SECTIONS WERE TAKEN. WHERE UNUSUAL BREAKAGE IN ROCK OCCURS, AND THIS WAS NOT ANTICIPATED, ADDITIONAL FINAL SECTIONS SHOULD BE TAKEN AND ORIGINAL GROUND SECTIONS INTERPOLATED.

BASELINE STAKES SHOULD BE SET AT ALL P.C.'S, P.T.'S, T.S.'S, S.T.'S, S.C.'S, AND C.S.'S IN STAKING OUT ALIGNMENT BUT SLOPE STAKES NEED NOT BE SET NOR CROSS SECTIONS TAKEN AT P.C.'S OR P.T.'S EXCEPT WHERE CALLED FOR IN THE ACCOMPANYING TABLES. THE TRANSITION WILL TAKE ITS FORM FROM THE POSITIONS GIVEN ON SHEETS 802.16 AND 802.17.

THE RIGHT OF WAY SHALL, IN ALL CASES, BE REFERENCED FROM THE BASELINE.

THE DESIGNER SHOULD EXERCISE CAUTION IN THE USE OF COMPOUND AND REVERSE CURVES UNLESS TOPOGRAPHICAL OR RIGHT OF WAY RESTRICTIONS MAKE THEIR USE APPROPRIATE. THE USE OF BROKEN-BACK CURVES SHOULD BE AVOIDED EXCEPT WHERE VERY UNUSUAL TOPOGRAPHICAL OR RIGHT OF WAY CONDITIONS MAKE OTHER ALTERNATIVES IMPRACTICAL. THE USE OF BROKEN-BACK CURVES MAY REQUIRE A DESIGN EXCEPTION FROM THE STATE LOCATION AND DESIGN ENGINEER. SEE SHEETS 802.11 THRU 802.14 FOR GENERAL INFORMATION ON COMPOUND, REVERSE AND BROKEN-BACK CURVE INFORMATION. REFER TO APPENDIX A OF THE ROAD DESIGN MANUAL FOR SPECIFIC COMPOUND AND REVERSE CURVE DESIGN INFORMATION.

A DESIGN EXCEPTION IS NOT REQUIRED WHEN USING VALUES FROM SHEETS 802.23 THRU 802.42 SINCE THESE TABLES WERE DERIVED WITHIN AASHTO GUIDELINES.

REFER TO CHAPTER 4 OF AASHTO'S A POLICY ON GEOMETRIC DESIGN OF HIGHWAYS AND STREETS FOR INFORMATION ON THE USE OF 18' PAVEMENT WIDTHS (9' LANE WIDTHS).

ALL TANGENT RUNOUT SECTION ( $L_t$ ) VALUES AND SUPERELEVATION RUNOFF LENGTHS ( $L_r$ ) LISTED IN THE TABLES HAVE BEEN ROUNDED UP TO THE NEAREST FOOT. ALL  $L_t$  VALUES ARE BASED ON A 2% CROWN.

SPECIFICATION REFERENCE	<h3 style="margin: 0;">EXPLANATION OF TABLES AND INSTRUCTIONS FOR USE GENERAL CONDITIONS</h3> <p style="margin: 0; font-size: small;">VIRGINIA DEPARTMENT OF TRANSPORTATION</p>	ROAD AND BRIDGE STANDARDS				
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; text-align: center; font-size: x-small;">REVISION DATE</td> <td style="width: 50%; text-align: center; font-size: x-small;">SHEET 1 OF 1</td> </tr> <tr> <td colspan="2" style="text-align: center; font-size: x-small;">802.01</td> </tr> </table>	REVISION DATE	SHEET 1 OF 1	802.01	
REVISION DATE	SHEET 1 OF 1					
802.01						

**STANDARD SYMBOLS**

- LOCATION  $\mathbb{B}$ .....ALIGNMENT ON WHICH THE PROPOSED RIGHT-OF-WAY AND CONSTRUCTION IS BASED.
- STANDARD PAVEMENT.....THE TYPICAL PAVEMENT SECTION TO BE SHOWN ON THE ROAD PLANS.
- P.C. ....POINT OF BEGINNING OF BASELINE CIRCULAR CURVE.
- P.T. ....POINT OF ENDING OF BASELINE CIRCULAR CURVE.
- P.C.C. ....POINT OF BASELINE COMPOUND CURVATURE.
- P.R.C.....POINT OF BASELINE REVERSE CURVE.
- T.S. ....POINT OF CHANGE FROM TANGENT TO TRANSITION CURVE. (TANGENT TO SPIRAL)
- S.C. ....POINT OF CHANGE FROM TRANSITION CURVE TO CIRCULAR CURVE. (SPIRAL TO CIRCULAR)
- C.S. ....POINT OF CHANGE FROM CIRCULAR CURVE TO TRANSITION CURVE. (CIRCULAR TO SPIRAL)
- S.T. ....POINT OF CHANGE FROM TRANSITION CURVE TO TANGENT. (SPIRAL TO TANGENT)
- RADIUS .....RADIUS OF BASELINE CIRCULAR CURVE.
- DV .....APPROXIMATE MAXIMUM SAFE SPEED IN MILES PER HOUR USING STANDARD RATE OF SUPER-ELEVATION.
- NC .....APPROXIMATE MAXIMUM SAFE SPEED IN MILES PER HOUR WITH NO SUPERELEVATION. FACTORS APPLY ONLT TO URBAN LOW SPEED CONDITIONS.
- Lr .....LENGTH OF TRANSITION CURVE MEASURED ALONG BASELINE. WHERE NO TRANSITION CURVE IS APPLIED Lr IS LENGTH OF SUPERELEVATION RUNOFF SECTION.
- W OR PW .....WIDTH OF STANDARD PAVEMENT.
- ZT .....DISTANCE FROM TRANSITIONED BASELINE TO EDGES OF TRANSITIONED PAVEMENT
- w .....MAXIMUM TOTAL PAVEMENT WIDENING.
- E .....RATE OF SUPERELEVATION.
- F .....SAFE SIDE FRICTION FACTOR.
- S .....AMOUNT OF SUPERELEVATION TO BE APPLIED TO THE BASELINE GRADE TO OBTAIN THE ELEVATIONS OF THE EDGES OF TRANSITIONED PAVEMENT.
- C .....DIFFERENCE IN ELEVATION BETWEEN BASELINE (CENTER) AND EDGE OF PAVEMENT FOR STANDARD PAVEMENT CROWN.
- Lt .....STANDARD PAVEMENT CROWN TRANSITION OR TANGENT RUNOUT SECTION.
- CP .....CHORD POINT (1/10 INCREMENTS OF TRANSITION CURVE).
- NPC.....NORMAL PAVEMENT CROWN.

ALL DISTANCES (HORIZONTAL AND VERTICAL) ARE MEASURED IN FEET.



ROAD AND BRIDGE STANDARDS

**TRANSITION CURVES FOR RURAL AND URBAN HIGHWAYS AND STREET CONDITIONS**

SPECIFICATION REFERENCE

SHEET 1 OF 1

REVISION DATE

802.02

VIRGINIA DEPARTMENT OF TRANSPORTATION

# RURAL CONDITION

RURAL CONDITIONS APPLY TO INTERSTATE, ARTERIAL, PRIMARY AND SECONDARY SYSTEMS OR TO ANY OTHER ROAD WITH RURAL TYPE DESIGN AND OPERATING CONDITIONS.

THESE TABLES CONTAIN THE MINIMUM ALLOWABLE SUPERELEVATION, TRANSITION LENGTHS, AND WIDENING CORRECTIONS FOR STANDARD RURAL PAVEMENT WIDTHS THROUGH A RANGE OF DESIGN VELOCITIES CONSIDERED MOST LIKELY TO BE USED IN RURAL HIGHWAY DESIGN.

DEFINITIONS FOR THE STANDARD SYMBOLS USED THROUGHOUT THESE TABLES ARE FOUND ON SHEET 802.02.

FOR MINIMUM DESIGN FACTORS FOR VARIOUS DESIGN SPEEDS FOR RURAL CONDITIONS SEE SHEETS 802.32 THRU 802.42.

ON CURVES WITH GREATER THAN 2865 FT RADIUS, THERE WILL BE NO PAVEMENT WIDENING. PAVEMENT WILL BE SUPERELEVATED BY AN AMOUNT EQUAL TO THE RATE SHOWN IN THE TABLES. SEE SHEET 802.06 FOR A GRAPHICAL ILLUSTRATION OF THE APPLICATION OF THIS CORRECTION.

ON CURVES WITH PAVEMENT WIDTHS OF 24' OR WIDER AND A RADIUS OF 882 FT. OR GREATER, THERE WILL BE NO PAVEMENT WIDENING. PAVEMENT WILL BE SUPERELEVATED BY AN AMOUNT EQUAL TO THE RATE SHOWN IN THESE TABLES.

WHEN USING COMPOUND OR REVERSE CURVES WITH RURAL CONDITIONS, SEE SHEETS 802.11, 802.13 AND 802.14 FOR POLICY ON THE USE OF SPIRAL TRANSITIONS.

FOR CURVE RADII NOT LISTED IN TABLES, REFER TO SHEET 802.21 TO CALCULATE SUPERELEVATION RUNOFF LENGTH ( $L_r$ ) AND PAVEMENT WIDENING ( $w$ ).

$L_r$  AND  $E$  SHOULD BE SHOWN ON THE PLANS FOR ALL CURVES..

FOR GRAPHICAL ILLUSTRATION OF DESIGN SUPERELEVATION RATES FOR RURAL CONDITIONS SEE SHEET 802.19.

FOR ADDITIONAL GENERAL INSTRUCTIONS (BOTH URBAN AND RURAL) SEE SHEET 802.01.

SEE SHEET 802.05 FOR A GRAPHICAL ILLUSTRATION OF SPIRAL TRANSITIONS.

SPECIFICATION  
REFERENCE

## EXPLANATION OF TABLES AND INSTRUCTIONS FOR USE RURAL CONDITION

VIRGINIA DEPARTMENT OF TRANSPORTATION

**VDOT**

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

802.03

## URBAN CONDITION

URBAN CONDITIONS APPLY TO URBAN STREET SYSTEMS AND ANY OTHER ROAD WITH PRESENT OR FUTURE URBAN STREET OPERATING CONDITIONS.

THESE TABLES CONTAIN THE MINIMUM SUPERELEVATION RATES AND TRANSITION LENGTHS FOR STANDARD URBAN PAVEMENT WIDTHS THROUGH A RANGE OF DESIGN VELOCITIES CONSIDERED MOST LIKELY TO BE USED IN URBAN ROAD DESIGN.

DEFINITIONS FOR THE STANDARD SYMBOLS USED THROUGHOUT THESE TABLES ARE FOUND ON SHEET 802.02.

A TABLE FOR "LOW SPEED URBAN" DESIGNS IS ON SHEET 802.23 WITH A RANGE OF STANDARD PAVEMENT WIDTHS (W), TRANSITION LENGTHS (L<sub>r</sub>), AND RADII OF CURVE WHEN SUPERELEVATED BY AN AMOUNT EQUAL TO THE NORMAL CROWN AND THE APPROXIMATE MAXIMUM SAFE SPEEDS (DV) AFFORDED THEREBY. VALUES IN THIS TABLE CAN BE USED ON STREETS WITH OPERATING SPEEDS LESS THAN OR EQUAL TO 45 MPH. ALSO SHOWN ARE THE APPROXIMATE MAXIMUM SAFE SPEEDS (NC) WITH NO SUPERELEVATION. VALUES FOR (NC) CAN BE USED ON URBAN ARTERIAL, COLLECTOR, AND LOCAL STREETS.

FOR MINIMUM DESIGN FACTORS FOR VARIOUS DESIGN SPEEDS FOR URBAN CONDITIONS SEE SHEETS 802.24 THRU 802.31

THE USE OF SPIRAL TRANSITIONS FOR COMPOUND AND REVERSE CURVES ON URBAN ROADWAYS SHOULD BE AVOIDED. HOWEVER, THE ENGINEER DOES HAVE LATITUDE IN THE USE OF SPIRAL TRANSITIONS IF THE GEOMETRICS ARE WARRANTED. SHOULD SPIRAL TRANSITIONS BE UTILIZED, SEE PAGE 802.13 AND 802.14 FOR DETAILS. WHEN URBAN CONDITIONS APPLY THERE WILL BE NO PAVEMENT WIDENING. THE LENGTH OF TRANSITION (L<sub>r</sub>) DETERMINES THE LENGTH OF SUPERELEVATION TRANSITION THROUGH WHICH THE OUTER EDGE OF PAVEMENT IS RAISED ABOVE THE BASELINE GRADE TO A MAXIMUM OF  $E\left(\frac{W}{2}\right)$ . SEE SHEET 802.07 FOR A GRAPHICAL ILLUSTRATION OF THE APPLICATION OF THIS CORRECTION.

FOR CURVE RADII NOT LISTED IN TABLES REFER TO SHEET 802.21 TO CALCULATE TRANSITION LENGTHS (L<sub>r</sub>).

L<sub>r</sub> SHOULD BE SHOWN ON THE PLANS FOR ALL CURVES.

E SHOULD BE SHOWN ON THE PLANS FOR ALL CURVES WITH URBAN STREET CONDITIONS.

FOR GRAPHICAL ILLUSTRATION OF DESIGN SUPERELEVATION RATES FOR URBAN CONDITIONS SEE SHEET 802.18.

FOR ADDITIONAL GENERAL INSTRUCTIONS (BOTH URBAN AND RURAL) SEE SHEET 802.01.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE


802.04

### EXPLANATION OF TABLES AND INSTRUCTIONS FOR USE URBAN CONDITION

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

CHORD POINTS (CP) =  $\frac{Lr}{10}$

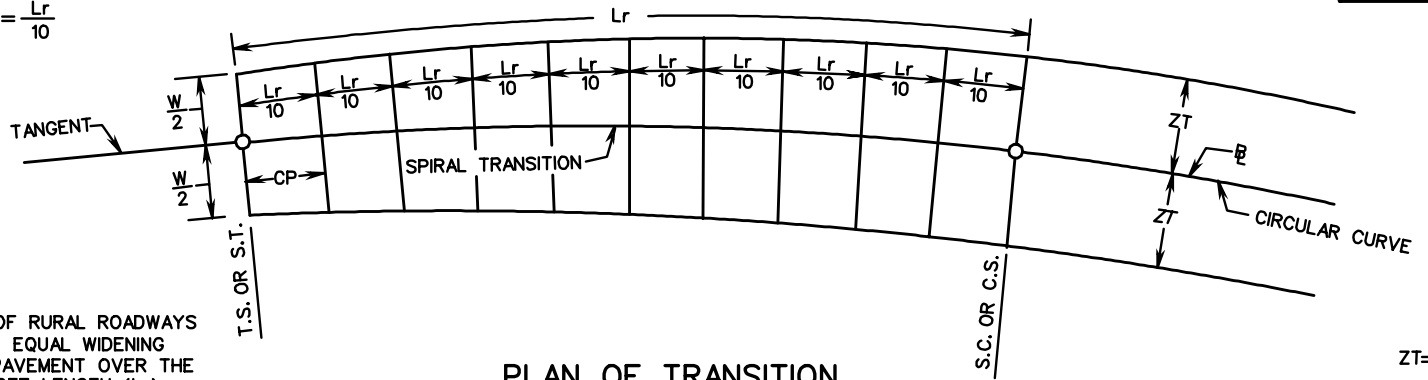


NOTE:  
PAVEMENT WIDENING OF RURAL ROADWAYS WILL BE ACHIEVED BY EQUAL WIDENING OF BOTH EDGES OF PAVEMENT OVER THE SUPERELEVATION RUNOFF LENGTH (Lr).

$ZT = \frac{W + w}{2}$

PLAN OF TRANSITION

NOTE:  
ON THE INSIDE OF CURVE THE STANDARD PAVEMENT CROWN (C) SHALL BE HELD UNTIL IT IS EXCEEDED BY THE TABULATED (S) VALUE, THEN THE (S) VALUES SHALL BE APPLIED.

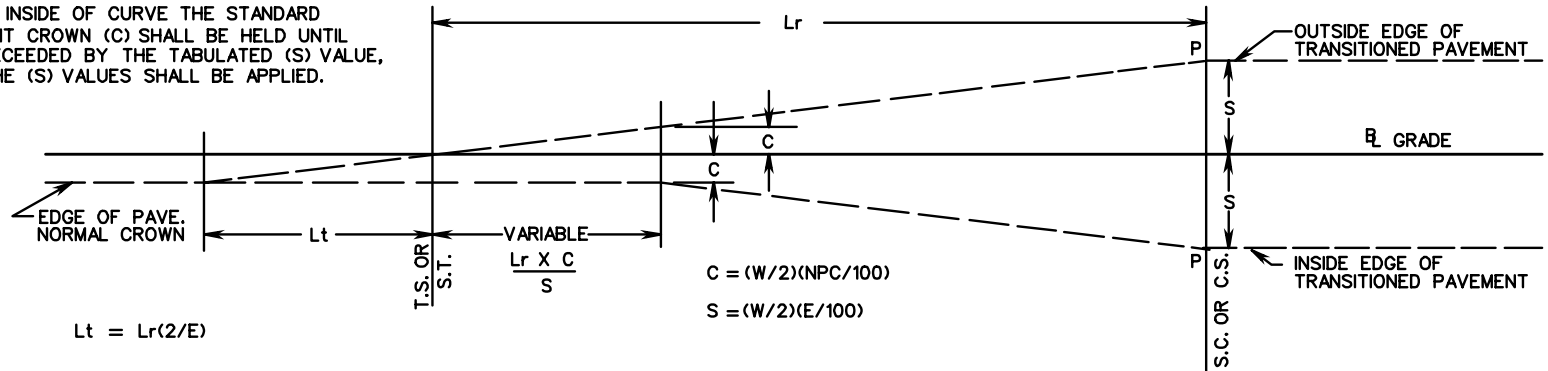


$Lt = Lr(2/E)$

$C = (W/2)(NPC/100)$   
 $S = (W/2)(E/100)$

PROFILE OF TRANSITION

NOTE: SHORT VERTICAL CURVES SHOULD BE INSERTED BY EYE AT POINTS (P) IF CONSIDERED NECESSARY.

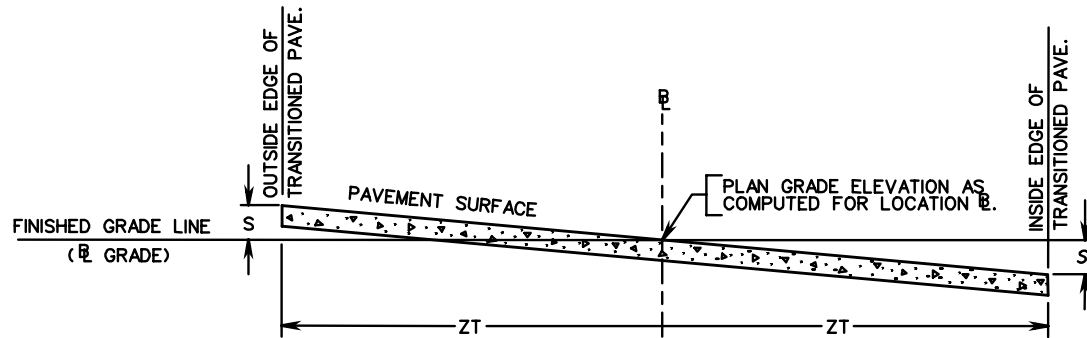

CROSS SECTION THRU TRANSITION

SPECIFICATION REFERENCE

DETAIL FOR TRANSITIONED  $\mathbb{B}$   
RURAL CONDITION WITH PAVEMENT WIDENING

VIRGINIA DEPARTMENT OF TRANSPORTATION





VDOT

ROAD AND BRIDGE STANDARDS


REVISION DATE

SHEET 1 OF 1

802.05

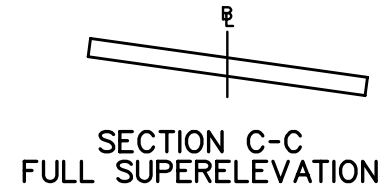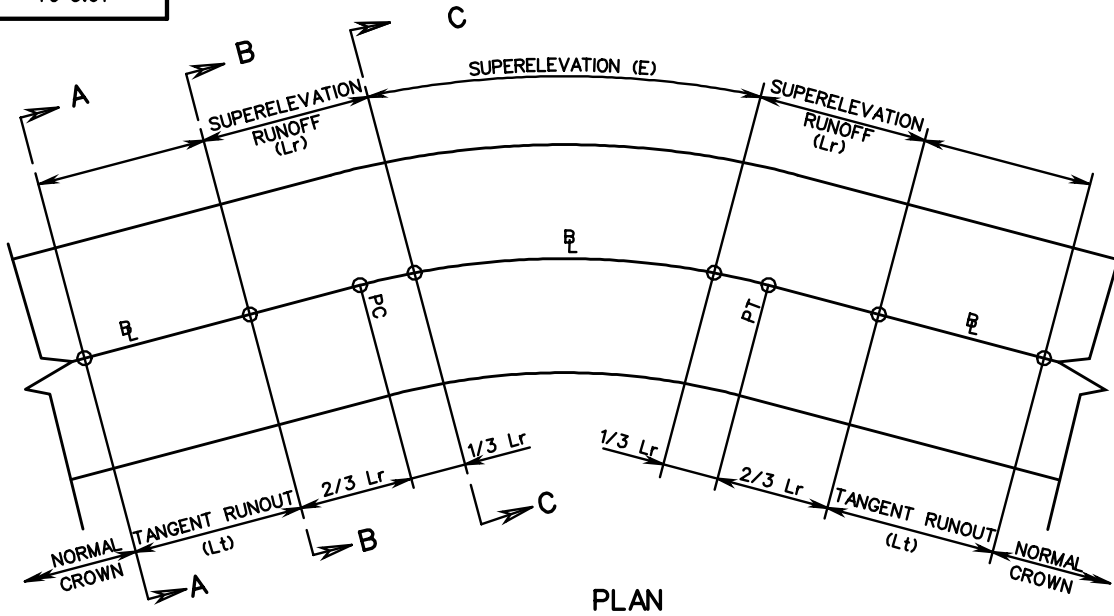


$C = (W/2)(NPC/100)$

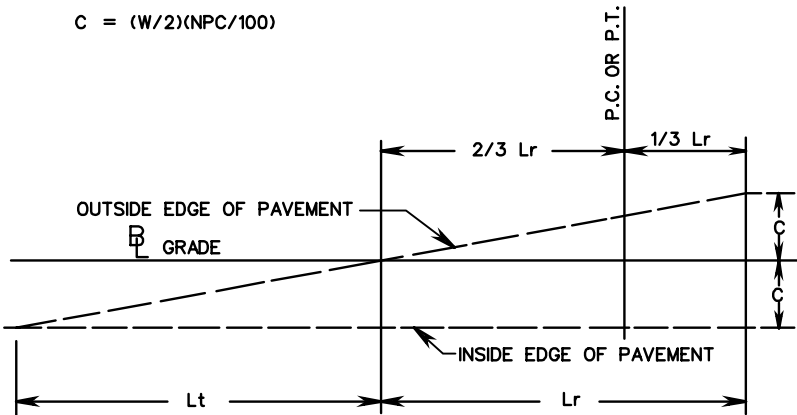

SUPERELEVATED BY AN AMOUNT EQUAL TO THE STANDARD PAVEMENT CROWN

$C = (W/2)(NPC/100)$   
 $S = (W/2)(E/100)$

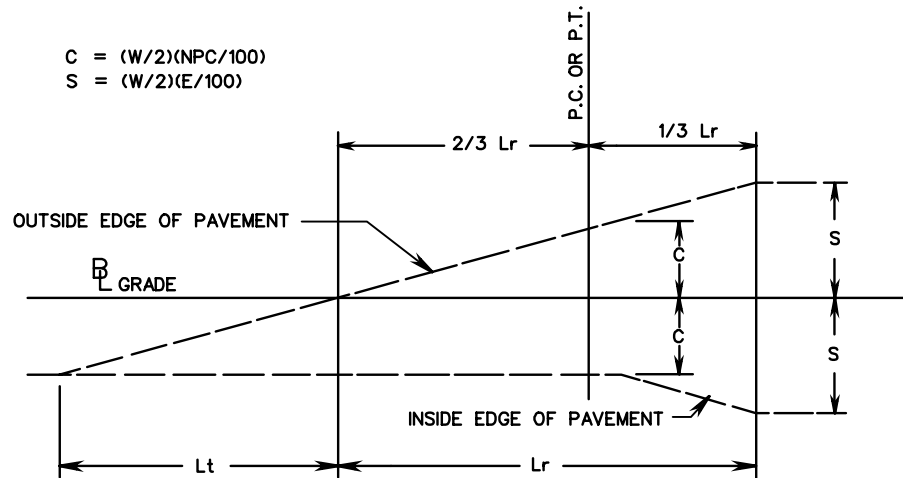

NOTE : ON THE INSIDE OF CURVE THE STANDARD PAVEMENT CROWN (C) SHALL BE HELD UNTIL IT IS EXCEEDED BY THE TABULATED RATE OF SUPERELEVATION (E).

SUPERELEVATED BY AN AMOUNT EXCEEDING THE STANDARD PAVEMENT CROWN



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE



802.06

DETAIL FOR NON-TRANSITION **B**  
 URBAN & RURAL CONDITIONS W/OUT PAVEMENT WIDENING

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
 REFERENCE



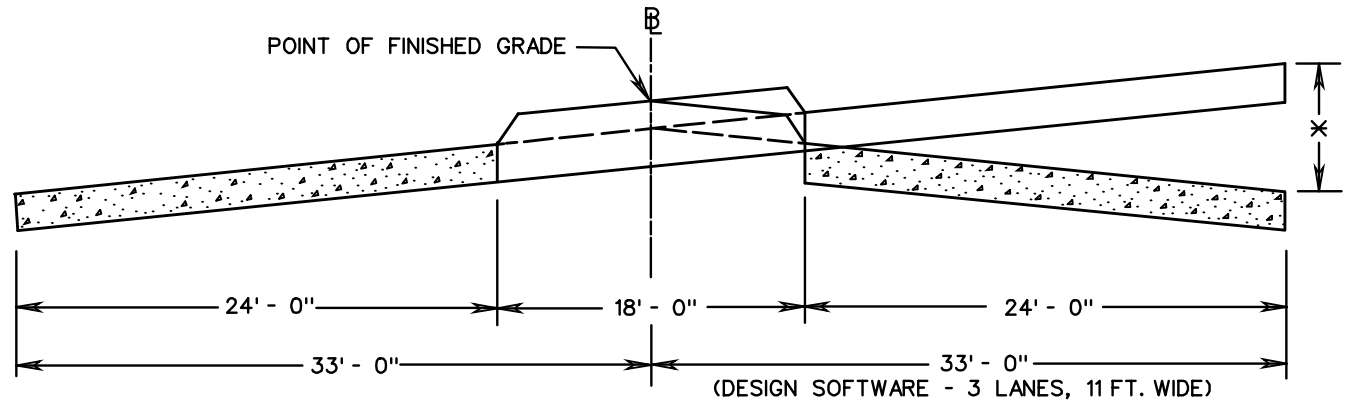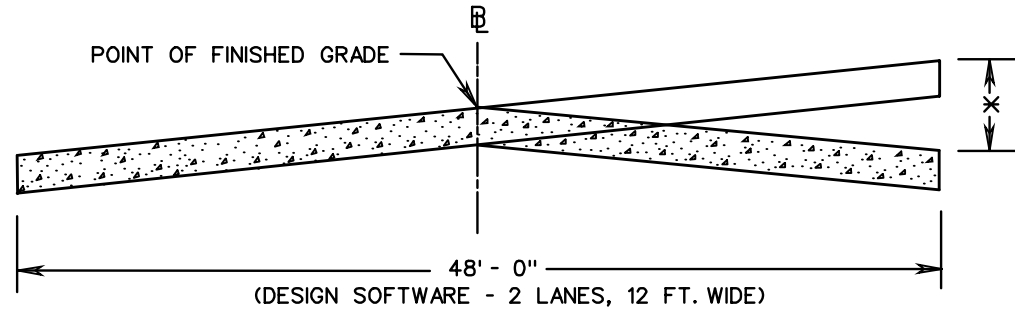

× THE ELEVATION DIFFERENTIAL BETWEEN NORMAL CROWN AND MAXIMUM SUPERELEVATION, RELATIVE TO THE BASELINE PROFILE.

ADDITIONAL INFORMATION MAY BE OBTAINED FROM A POLICY ON GEOMETRIC DESIGN OF HIGHWAYS AND STREETS (AASHTO) BOOK, CHAPTER III - ELEMENTS OF DESIGN (SUPERELEVATION RUNOFF).

ON STANDARD TC-5.04ULS, TC-5.01U , AND TC-5.01R (WITHOUT PAVEMENT WIDENING) SUPERELEVATED CURVES, POSITION THE SUPERELEVATION RUNOFF SECTION ( $L_r$ ) TWO THIRDS ( $2/3$ ) ON THE TANGENT AND ONE THIRD ( $1/3$ ) INTO THE CURVE. STATIONS AND ELEVATIONS FOR THESE TRANSITIONS WILL NEED TO BE COMPUTED FOR TS, SC, CS, ST AND EVERY 25' INCREMENT ( i.e., 10+00, 10+25, 10+50, 10+75, etc...)

SPECIFICATION REFERENCE

## DETAILS OF SUPERELEVATION ABOUT BASELINE

VIRGINIA DEPARTMENT OF TRANSPORTATION


**VDOT**

ROAD AND BRIDGE STANDARDS


REVISION DATE

SHEET 1 OF 1

802.07

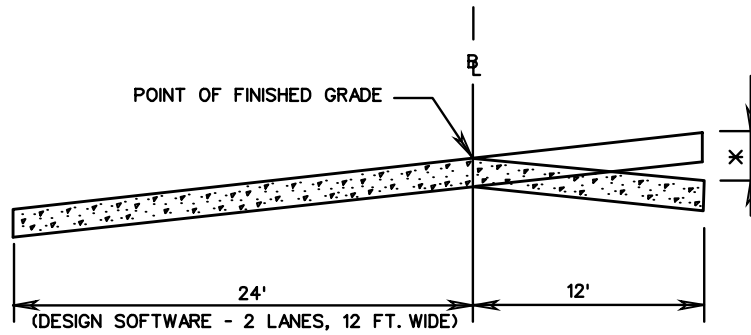

THE PAVEMENT WIDTHS SHOWN IN THE STANDARD TC-5.01 TABLES ON SHEET 802.24 THROUGH 802.42 REPRESENT TWICE THE DISTANCE FROM THE CROWNLINE TO THE EDGE OF PAVEMENT ON THE HIGH SIDE.

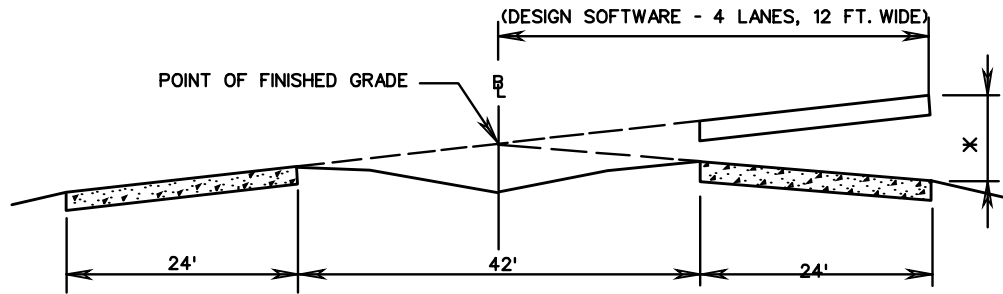

\* THE ELEVATION DIFFERENTIAL BETWEEN NORMAL CROWN AND MAXIMUM SUPERELEVATION, RELATIVE TO THE BASELINE PROFILE.

ADDITIONAL INFORMATION MAY BE OBTAINED FROM A POLICY ON GEOMETRIC DESIGN OF HIGHWAYS AND STREETS (AASHTO) BOOK, CHAPTER III- ELEMENTS OF DESIGN (SUPERELEVATION RUNOFF).

PROJECTS IN WHICH LANES MAY BE ADDED IN THE FUTURE IN THE MEDIAN AREA SHOULD BE DESIGNED WITH THE CONSTRUCTION BASELINE AND POINT OF FINISHED GRADE LOCATED IN THE MIDDLE OF THE MEDIAN. SUPERELEVATION IS TO BE ROTATED FROM THIS BASELINE POINT. THIS WILL PREVENT UNEVEN PAVEMENT PROBLEMS (WHEN ADDITIONAL LANES ARE ADDED IN THE MEDIAN AREA) SUCH AS CROSSOVER GRADES AS WELL AS THE NEED FOR RETAINING WALLS, MEDIAN BARRIERS AND SPECIAL DESIGN DRAINAGE STRUCTURES. ADDITIONAL RIGHT OF WAY OR EASEMENTS, IN MOST SITUATIONS, WILL NOT BE REQUIRED.



ROAD AND BRIDGE STANDARDS


SHEET 1 OF 1

REVISION DATE

802.08

## DETAILS OF SUPERELEVATION ABOUT BASELINE

VIRGINIA DEPARTMENT OF TRANSPORTATION

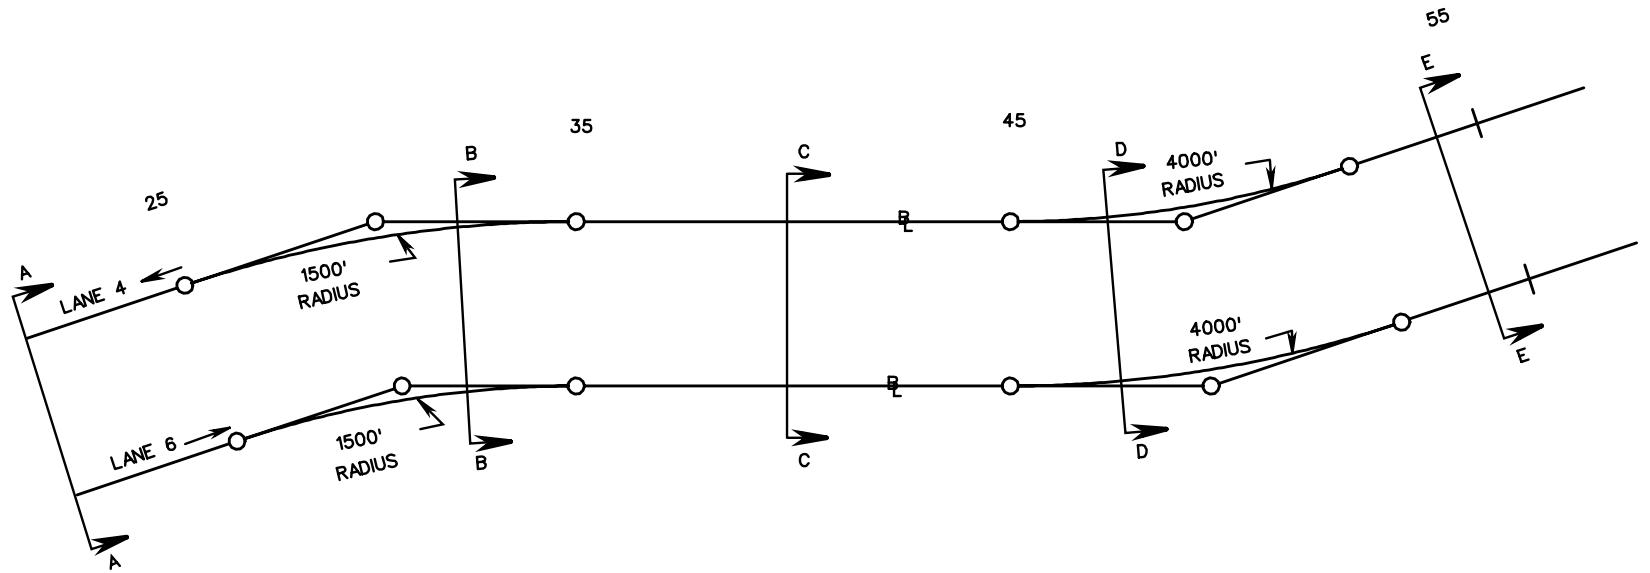

SPECIFICATION  
REFERENCE

## EXAMPLE FOR FOUR LANE ROADWAYS

VIRGINIA DEPARTMENT OF TRANSPORTATION


**VDOT**

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

802.09

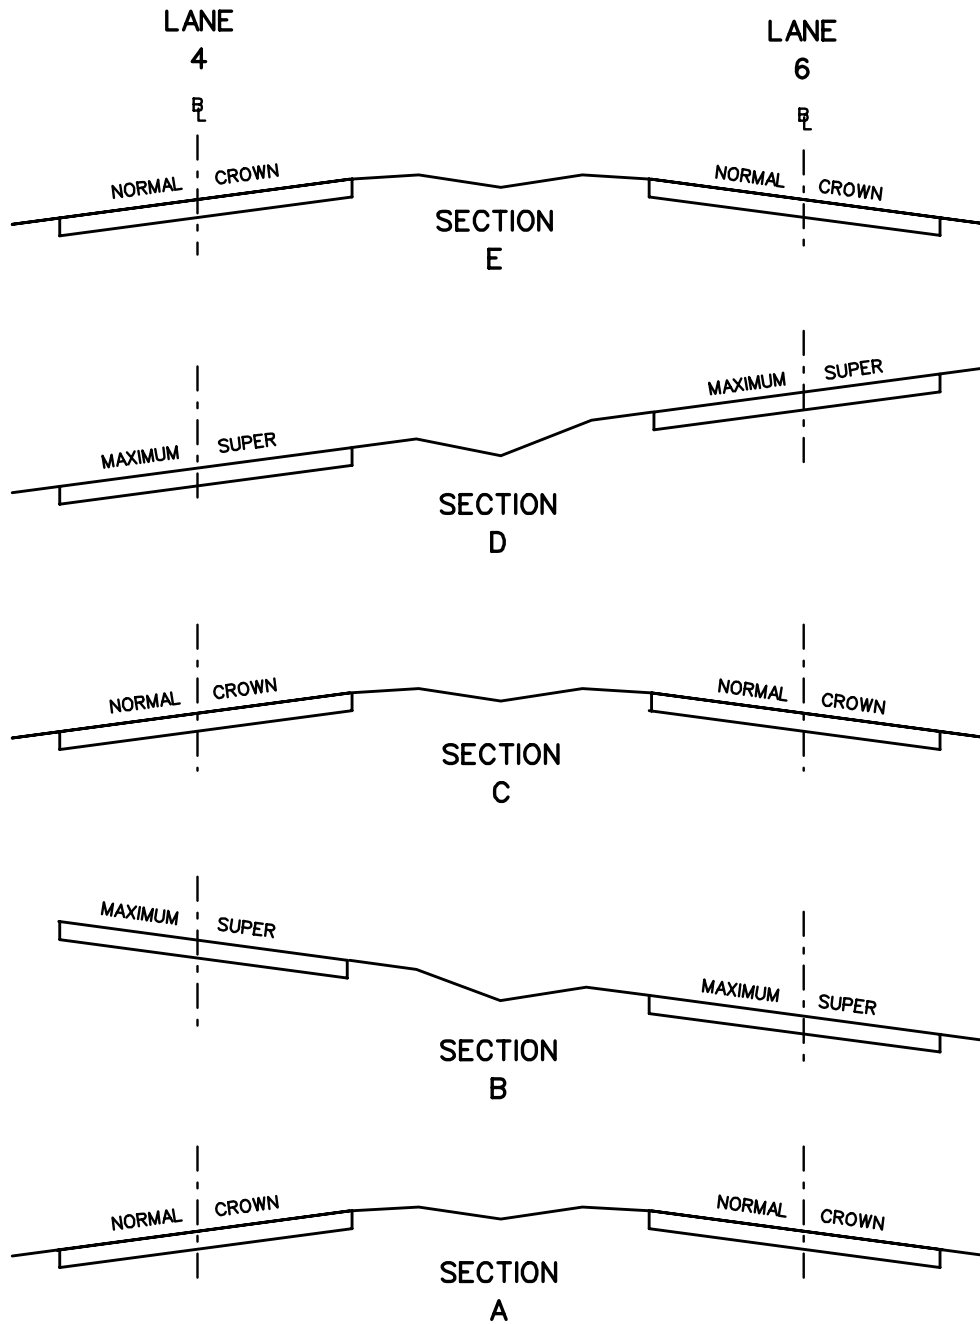

ROAD AND BRIDGE STANDARDS



SHEET 1 OF 1

REVISION DATE

802.10

# CROSS SECTION - FOUR LANE ROADWAY

VIRGINIA DEPARTMENT OF TRANSPORTATION

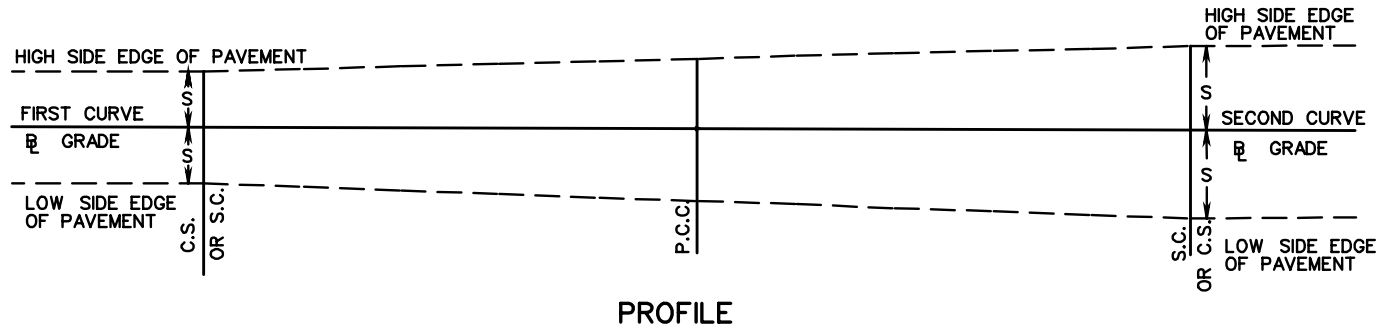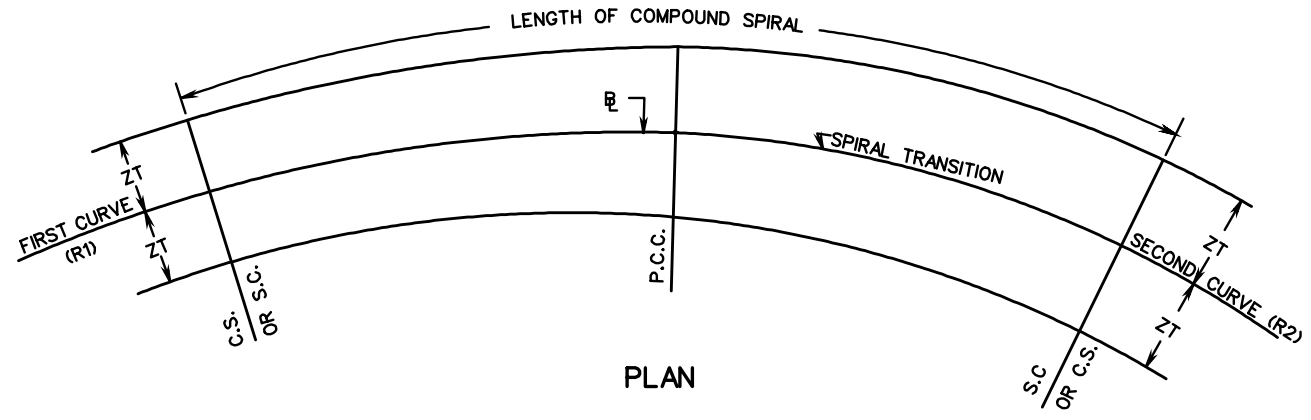


NOTE:

1. FOR COMPOUND CURVES ON OPEN ROADWAYS, THE RATIO OF FLATTER RADIUS (R1) TO THE SHARPER RADIUS (R2) SHALL NOT EXCEED 1.5:1. WHERE PRACTICAL, A DESIRABLE MAXIMUM RATIO OF 1.75:1 SHOULD BE USED.
2. FOR COMPOUND CURVES ON RAMPS AND AT INTERSECTIONS, THE RATIO OF THE FLATTER RADIUS (R1) TO THE SHARPER RADIUS (R2) SHALL NOT EXCEED 2:1.
3. COMPUTE STRAIGHT LINE WIDENING AND SUPERELEVATION TRANSITION FROM MAXIMUM OF FIRST CURVE TO MAXIMUM OF SECOND CURVE.
4. REFER TO CHAPTER 3 OF THE AASHTO GREEN BOOK FOR ADDITIONAL COMPOUND CURVE DESIGN INFORMATION.


SPECIFICATION REFERENCE

**METHOD OF APPLYING TC-5.01 ON COMPOUND CURVES  
RURAL CONDITIONS WITH PAVEMENT WIDENING**  
VIRGINIA DEPARTMENT OF TRANSPORTATION

<b>VDOT</b> ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 1
802.11	

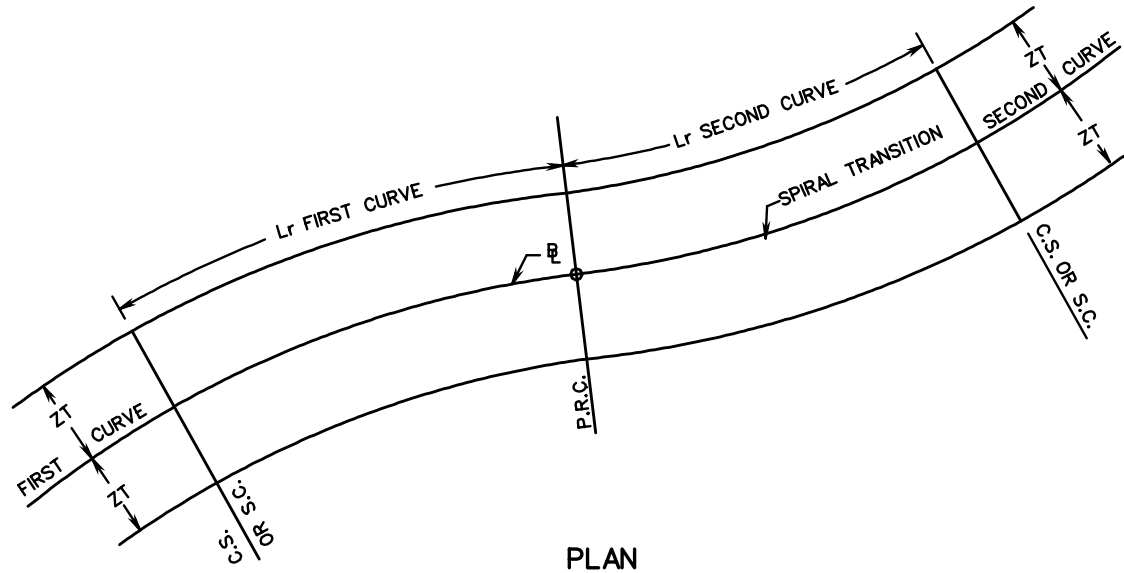

PLAN

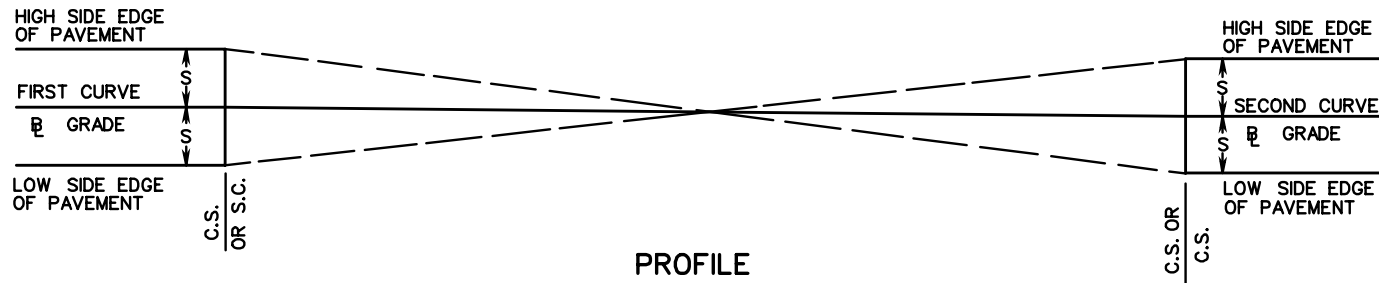

PROFILE

NOTE:

1. COMPUTE STRAIGHT LINE WIDENING AND SUPERELEVATION TRANSITION FROM MAXIMUM OF FIRST CURVE TO MAXIMUM OF SECOND CURVE.
2. REFER TO CHAPTER 3 OF THE AASHTO'S A POLICY ON THE GEOMETRIC DESIGN OF HIGHWAYS AND STREETS FOR ADDITIONAL REVERSE CURVE DESIGN INFORMATION.



ROAD AND BRIDGE STANDARDS

METHOD OF APPLYING TC-5.01 ON REVERSE CURVES  
RURAL CONDITION WITH PAVEMENT WIDENING



SPECIFICATION  
REFERENCE

SHEET 1 OF 1

REVISION DATE

802.12


VIRGINIA DEPARTMENT OF TRANSPORTATION

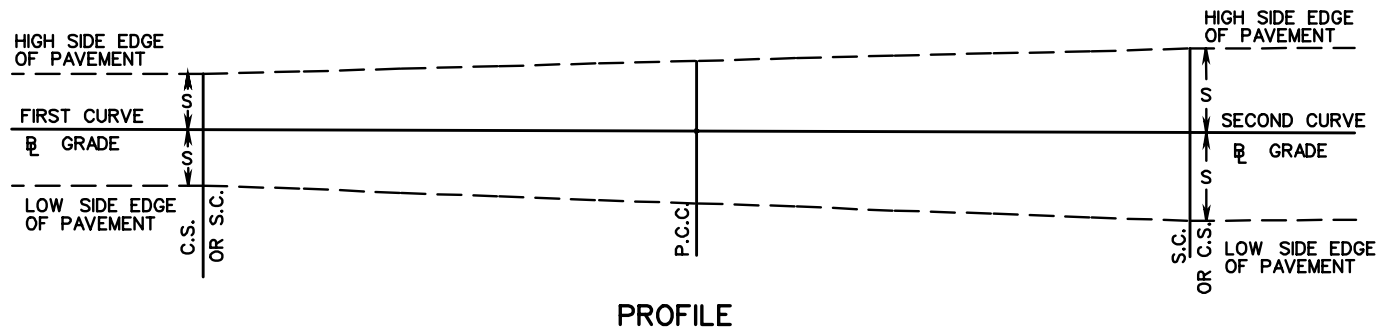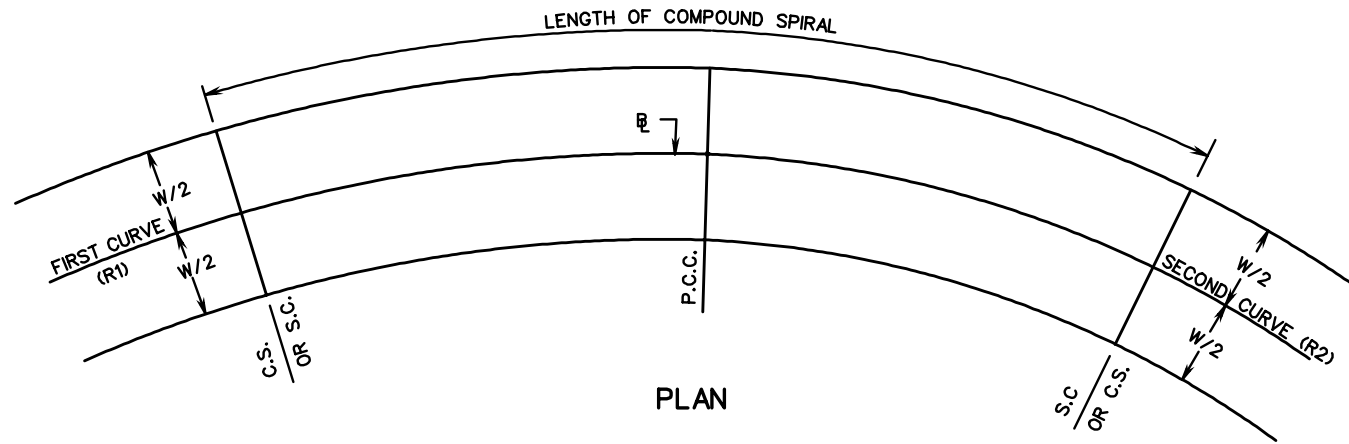


**NOTE:**

1. FOR COMPOUND CURVES ON OPEN ROADWAYS, THE RATIO OF FLATTER RADIUS (R1) TO THE SHARPER RADIUS (R2) SHALL NOT EXCEED 1.5:1 WHERE PRACTICAL, A DESIRABLE MAXIMUM RATIO OF 1.75:1 SHOULD BE USED.
2. FOR COMPOUND CURVES ON RAMPS AND AT INTERSECTIONS, THE RATIO OF THE FLATTER RADIUS (R1) TO THE SHARPER RADIUS (R2) SHALL NOT EXCEED 2:1.
3. COMPUTE SUPERELEVATION TRANSITION FROM MAXIMUM OF FIRST CURVE TO MAXIMUM OF SECOND CURVE. LENGTH OF COMPOUND SPIRAL COMPUTED PER PAGE 802.21.
4. REFER TO CHAPTER 3 OF THE AASHTO GREEN BOOK FOR ADDITIONAL COMPOUND CURVE DESIGN INFORMATION.
5. THE USE OF SPIRAL TRANSITIONS FOR COMPOUND AND REVERSE CURVES ON URBAN ROADWAYS SHOULD BE AVOIDED. HOWEVER, THE ENGINEER DOES HAVE LATITUDE IN THE USE OF SPIRAL TRANSITIONS IF THE GEOMETRICS ARE WARRANTED.

SPECIFICATION REFERENCE	<h2 style="margin: 0;">METHOD OF APPLYING TC-5.01 ON COMPOUND CURVES URBAN &amp; RURAL CONDITIONS W/OUT PAVEMENT WIDENING</h2> <p style="margin: 0;">VIRGINIA DEPARTMENT OF TRANSPORTATION</p>	ROAD AND BRIDGE STANDARDS REVISION DATE      SHEET 1 OF 1 802.13
----------------------------	--	--

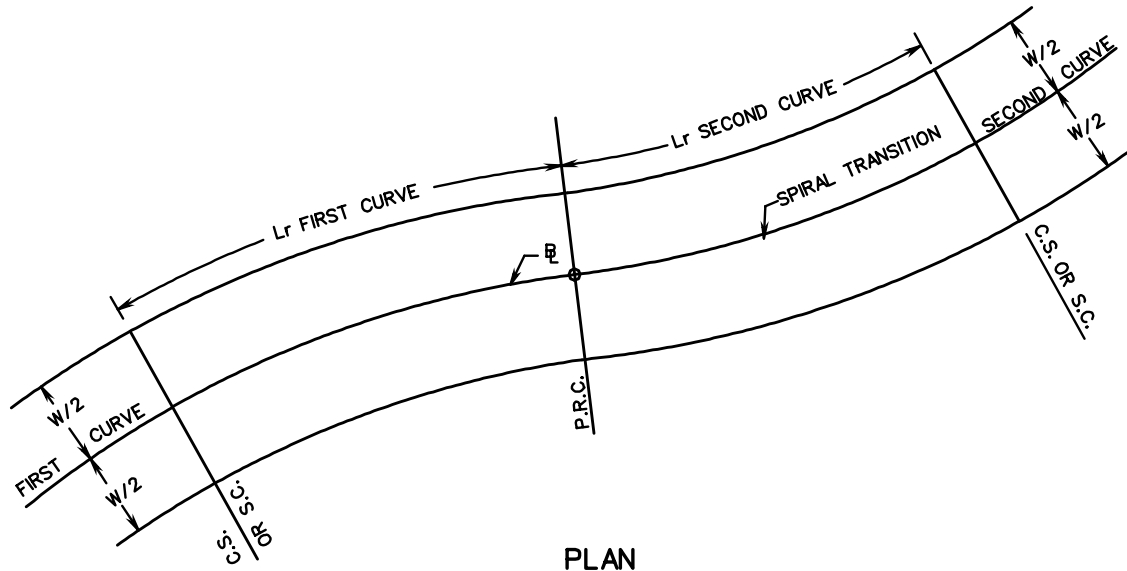

PLAN

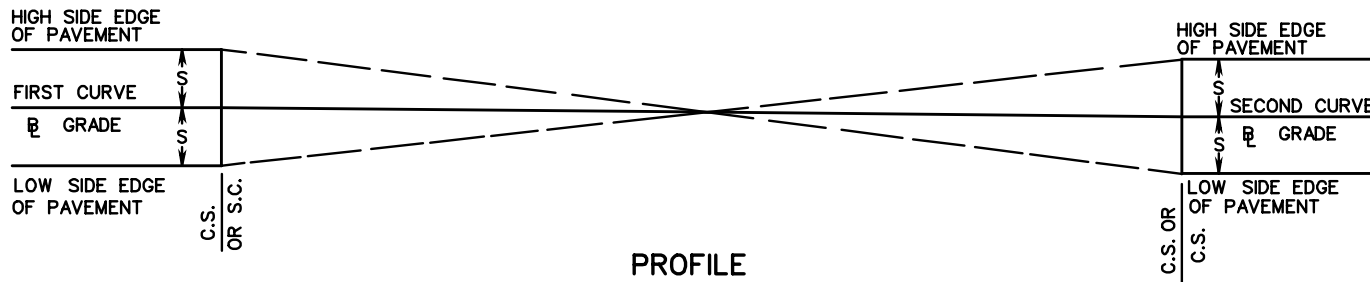

PROFILE

NOTE:

1. COMPUTE SUPERELEVATION TRANSITION FROM MAXIMUM OF FIRST CURVE TO MAXIMUM OF SECOND CURVE. LENGTH OF SUPERELEVATION RUNOFF (Lr) COMPUTED PER PAGE 802.21.
2. REFER TO CHAPTER 3 OF THE AASHTO'S A POLICY ON THE GEOMETRIC DESIGN OF HIGHWAYS AND STREETS FOR ADDITIONAL REVERSE CURVE DESIGN INFORMATION.
3. THE USE OF SPIRAL TRANSITIONS FOR COMPOUND AND REVERSE CURVES ON URBAN ROADWAYS SHOULD BE AVOIDED. HOWEVER, THE ENGINEER DOES HAVE LATITUDE IN THE USE OF SPIRAL TRANSITIONS IF THE GEOMETRICS ARE WARRANTED.



ROAD AND BRIDGE STANDARDS

METHOD OF APPLYING TC-5.01 ON REVERSE CURVES  
URBAN & RURAL CONDITIONS W/OUT PAVEMENT WIDENING

SPECIFICATION  
REFERENCE

SHEET 1 OF 1

REVISION DATE

802.14

VIRGINIA DEPARTMENT OF TRANSPORTATION



## TRANSITION TABLE

LENGTH OF TANGENT RUNOUT (Lt)	START/END OF SUPERELEVATION RUNOFF (Lr)	DISTANCE IN FEET FROM START/END OF SUPERELEVATION RUNOFF SECTION (Lr)				NORMAL CROWN
		1	2	3	4	
220	0	44	88	132	176	220
200	0	40	80	120	140	200
180	0	36	72	108	144	180
160	0	32	64	96	128	160
140	0	28	56	84	112	140
120	0	24	48	72	96	120
100	0	20	40	60	80	100
90	0	18	36	54	72	90
80	0	16	32	48	64	80
60	0	15	30	45	—	60
40	0	20	—	—	—	40

**NOTE:**

TABLE LISTS POSITIONS ON TRANSITIONS AT WHICH SLOPE STAKES SHOULD BE SET, CONSTRUCTION AND FINAL CROSS-SECTIONS TAKEN, FINE GRADING STAKES (BLUE TOP) SET, AND FORM STAKES SET (CONCRETE PAVEMENT ONLY).

# URBAN CONDITIONS RURAL CONDITIONS WITHOUT PAVEMENT WIDENING

FOR USE WITH FLEXIBLE AND CONCRETE PAVEMENT  
(Lr POSITIONED 2/3 ±ON TANGENT, 1/3 ±ON CURVE)

LENGTH OF SUPERELEVATION RUNOFF (Lr)	END/ BEGIN TANGENT RUNOUT (Lt)	DISTANCE IN FEET FROM P.C. OR P.T. ON TANGENT						P.C. OR P.T.	DISTANCE IN FEET FROM P.C. OR P.T. ON CURVE			FULL SUPER ELEVATION (E)
		1	2	3	4	5	6		7	8	9	
480	320	272	224	176	128	80	32	STAKE	16	64	112	160
460	307	261	215	169	123	77	31	STAKE	15	61	107	153
440	293	249	205	161	117	73	29	STAKE	15	59	103	147
420	280	238	196	154	112	70	28	STAKE	14	56	98	140
400	267	227	187	147	107	67	27	STAKE	13	53	93	133
380	253	215	177	139	101	63	25	STAKE	13	51	89	127
360	240	204	168	132	96	60	24	STAKE	12	48	84	120
340	227	193	159	125	91	57	23	STAKE	11	45	79	113
320	213	181	149	117	85	53	21	STAKE	11	43	75	107
300	200	170	140	110	80	50	20	STAKE	10	40	70	100
280	187	159	131	103	75	47	19	STAKE	9	37	65	93
260	173	147 *	121	95 *	69	43 *	17	STAKE *	9	35 *	61	87
240	160	136 *	112	88 *	64	40 *	16	STAKE *	8	32 *	56	80
220	147	125 *	103	81 *	59	37 *	15	STAKE *	7	29 *	51	73
200	133	113 *	93	73 *	53	33 *	13	STAKE *	7	27 *	47	67
180	120	102 *	84	66 *	48	30 *	12	STAKE *	6	24 *	42	60
160	107	91 *	75	59 *	43	27 *	11	STAKE *	5	21 *	37	53

NOTE :

TABLE GIVING POSITIONS ON CURVES AT WHICH SLOPE STAKES SHOULD BE SET,  
CONSTRUCTION AND FINAL CROSS-SECTIONS TAKEN, FINE GRADING STAKES (BLUE TOP) SET,  
AND FORM STAKES SET (CONCRETE PAVEMENT ONLY).

\* DENOTES ADDITIONAL STAKING POSITIONS FOR USE WITH CONCRETE PAVEMENT ONLY.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

802.16

## TABLE I

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

# RURAL CONDITIONS WITH PAVEMENT WIDENING

FOR USE WITH FLEXIBLE AND CONCRETE PAVEMENT


LENGTH OF SUPERELEVATION RUNOFF (Lr)	T.S. OR S.T.	DISTANCE IN FEET FROM T.S. OR S.T. ALONG SPIRAL TRANSITION									S.C. OR C.S.
		1	2	3	4	5	6	7	8	9	
		480	0	48	96	144	192	240	288	336	
460	0	46	92	138	184	230	276	322	368	414	460
440	0	44	88	132	176	220	264	308	352	396	440
420	0	42	84	126	168	210	252	294	336	378	420
400	0	40	80	120	160	200	240	280	320	360	400
380	0	38	76	114	152	190	228	266	304	342	380
360	0	36	72	108	144	180	216	252	288	324	360
340	0	34	68	102	136	170	204	238	272	306	340
320	0	32	64	96	128	160	192	224	256	288	320
300	0	30	60	90	120	150	180	210	240	270	300
280	0	28	56	84	112	140	168	196	224	252	280
260	0	26 *	52	78 *	104	130 *	156	182 *	208	234 *	260
240	0	24 *	48	72 *	96	120 *	144	168 *	192	216 *	240
220	0	22 *	44	66 *	88	110 *	132	154 *	176	198 *	220
200	0	20 *	40	60 *	80	100 *	120	140 *	160	180 *	200
180	0	18 *	36	54 *	72	90 *	108	126 *	144	162 *	180
160	0	16 *	32	48 *	64	80 *	96	112 *	128	144 *	160

NOTE :

TABLE GIVING POSITIONS ON TRANSITION CURVES AT WHICH SLOPE STAKES SHOULD BE SET, CONSTRUCTION AND FINAL CROSS-SECTIONS TAKEN, FINE GRADING STAKES (BLUE TOP) SET, AND FORM STAKES SET (CONCRETE PAVEMENT ONLY).

\* DENOTES ADDITIONAL STAKING POSITIONS FOR USE WITH CONCRETE PAVEMENT ONLY.

SPECIFICATION REFERENCE	<h2>TABLE 2</h2>	<b>VDOT</b> ROAD AND BRIDGE STANDARDS	
		REVISION DATE	SHEET 1 OF 1 802.17
VIRGINIA DEPARTMENT OF TRANSPORTATION			

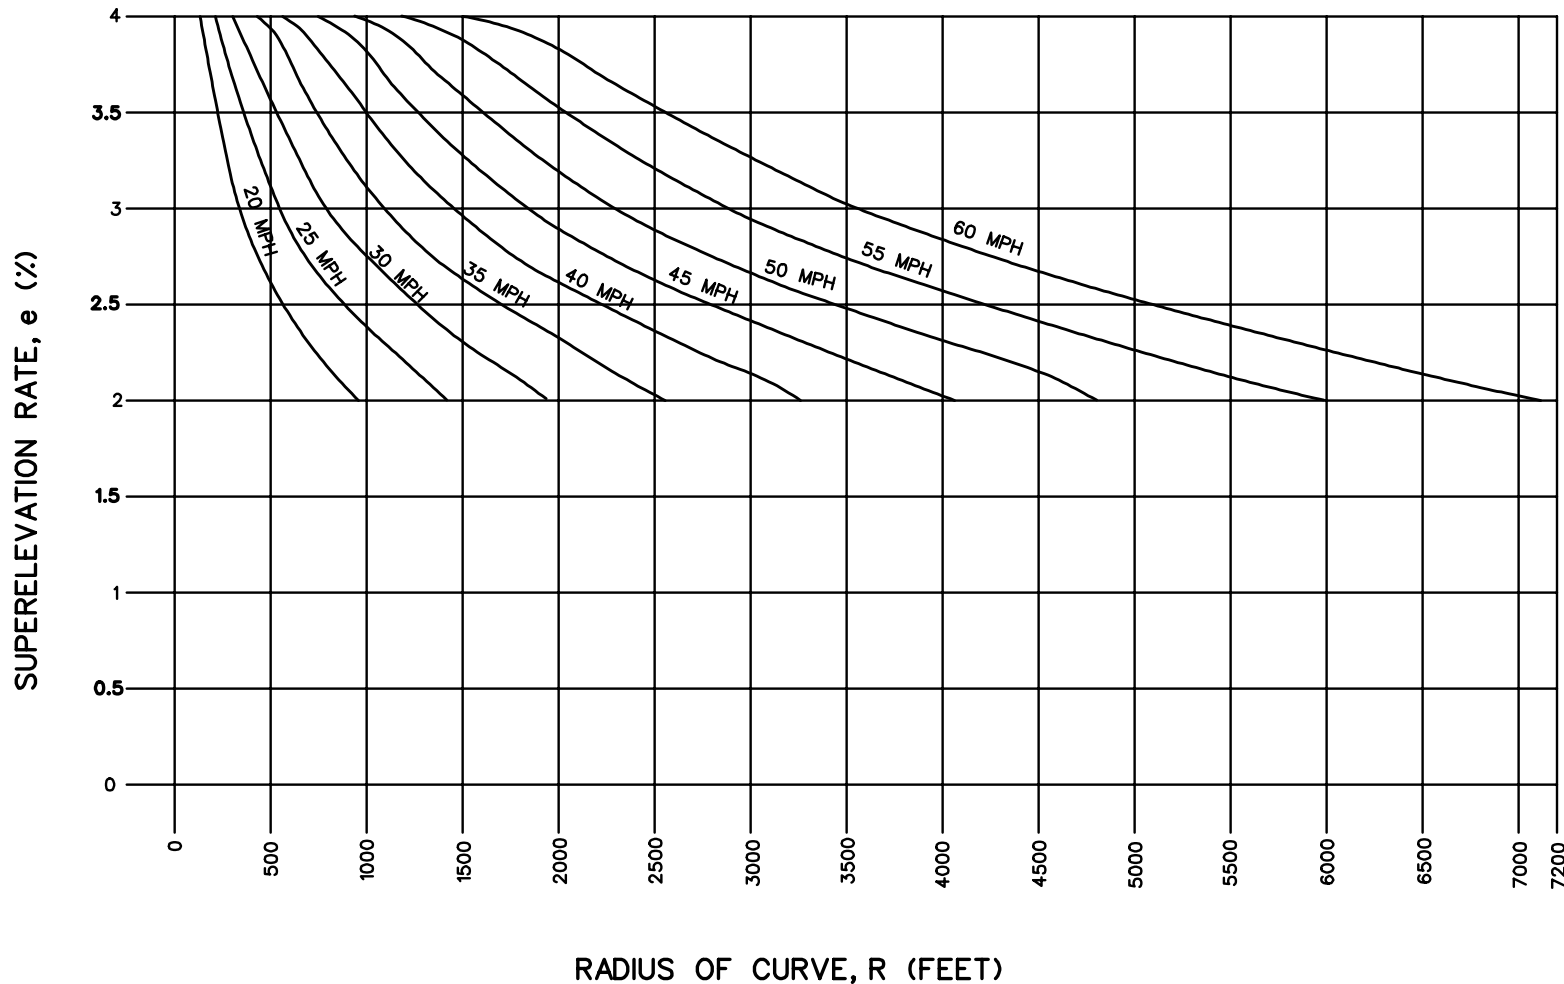

NOTE:

INTERMEDIATE UNITS OF SUPERELEVATION AND RADI NOT LISTED ON GRAPH CAN BE GRAPHED USING A CIVIL ENGINEER'S 10 SCALE WITH EACH MARK EQUAL TO 100' OF RADIUS AND 0.1% OF SUPERELEVATION.



ROAD AND BRIDGE STANDARDS


DESIGN SUPERELEVATION RATES  
 URBAN CONDITIONS  
 VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
 REFERENCE

SHEET 1 OF 1

REVISION DATE

802.18

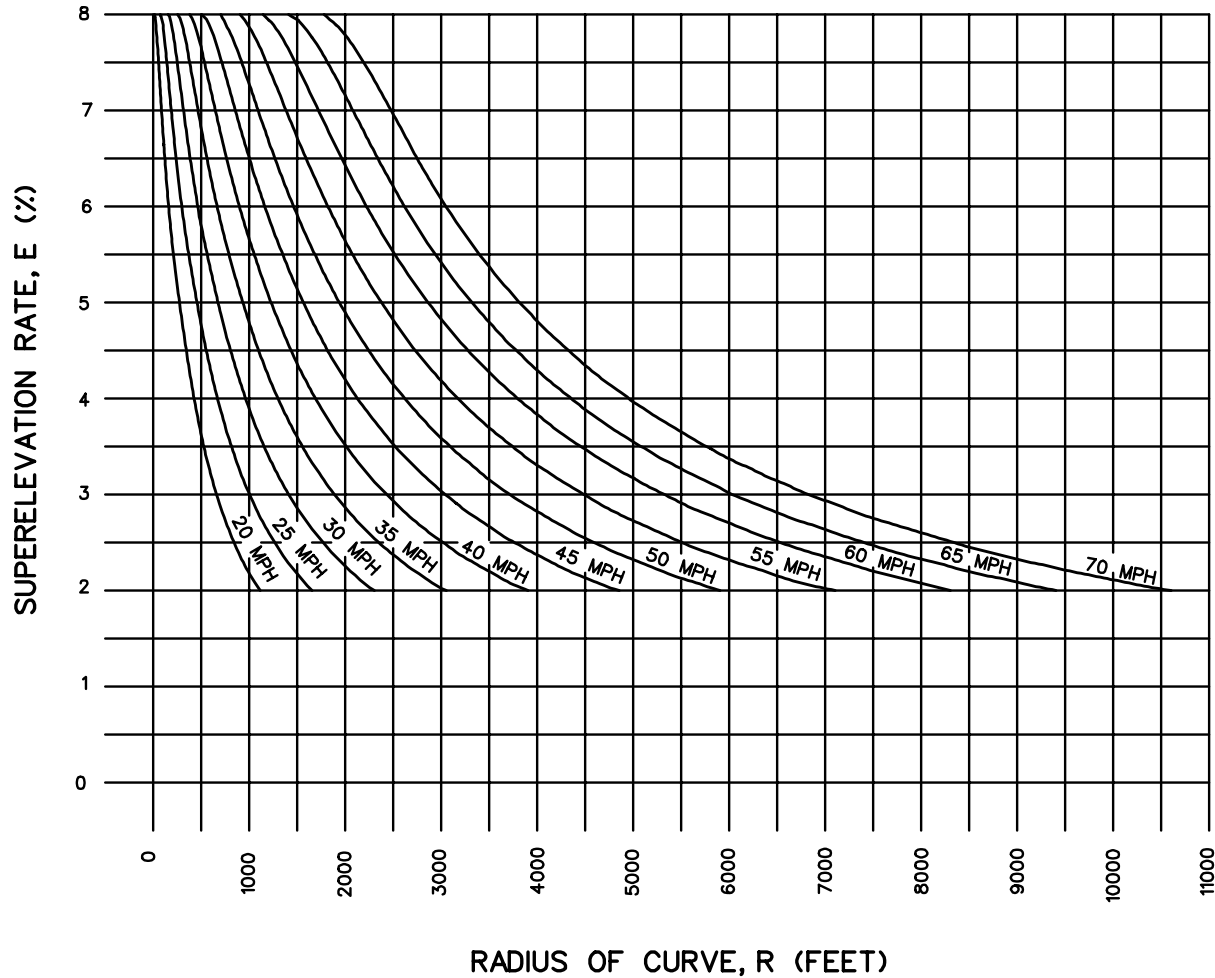

SPECIFICATION  
REFERENCE

## DESIGN SUPERELEVATION RATES RURAL CONDITIONS

VIRGINIA DEPARTMENT OF TRANSPORTATION

**VDOT**

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

802.19

THIS PAGE INTENTIONALLY LEFT BLANK



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

802.20

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

**CURVE WIDENING TABLES**

**SU DESIGN VEHICLE**

COMPONENT	SIZE
OVERALL WIDTH (u)	8.0 ft
WHEELBASE (L)	20 ft
FRONT OVERHANG (A)	4 ft

**LATERAL CLEARANCE**

LANE WIDTH	CLEARANCE (C)
9 ft	1.5 ft
10 ft	2 ft
11 ft	2.5 ft
12 ft	3 ft
16 ft	5 ft

**ADJUSTMENT FACTORS**

NUMBER OF LANES ROTATED $n_1$	ADJUSTMENT FACTOR ( $b_w$ )
1	1.00
1.5	0.8333
2	0.75
2.5	0.70
3	0.6667
3.5	0.6425

**RELATIVE GRADIENTS**

DESIGN SPEED $V_D$ MPH	MAXIMUM RELATIVE GRADIENT (rg)	MIN. TRANSITION LENGTH IN FEET RURAL CONDITIONS WITH PAVEMENT WIDENING AND REVERSE CURVES FOR ALL CONDITIONS (2 SECOND RULE)	MAXIMUM RELATIVE GRADIENT (rg) RAMP AND LOOPS	
			18' LANE	24' LANE
		20	0.74	59
25	0.70	74	0.84	0.93
30	0.66	88	0.80	0.88
35	0.62	103	0.75	0.83
40	0.58	117	0.70	0.77
45	0.54	132	0.65	0.72
50	0.50	147	0.60	0.67
55	0.47	161	0.57	0.63
60	0.45	176	0.54	0.60
65	0.43	191	0.52	0.57
70	0.40	205	0.48	0.53

- A - FRONT OVERHANG OF DESIGN VEHICLE FROM APPROPRIATE TABLE.
- $b_w$  - ADJUSTMENT FACTOR FROM TABLE.
- C - LATERAL CLEARANCE OF DESIGN VEHICLE FROM APPROPRIATE TABLE.
- E - SUPERELEVATION RATE FROM APPROPRIATE TABLE.
- $F_A$  - CALCULATED WIDTH OF OVERHANG FOR DESIGN VEHICLE.
- L - WHEELBASE OF DESIGN VEHICLE FROM APPROPRIATE TABLE.
- $L_r$  - LENGTH OF SUPERELEVATION RUNOFF SECTION.

**DEFINITIONS**

- $L_t$  - LENGTH OF TANGENT RUNOUT SECTION
- M - MULTIPLE LANE FACTOR.
- N - NUMBER OF LANES.
- $n_1$  - NUMBER OF LANES ROTATED (FROM TABLES).
- $P_w$  - PAVEMENT WIDTH.
- R - RADIUS OF CURVE.
- rg - RELATIVE GRADIENT FROM APPROPRIATE TABLE.
- U - CALCULATED TRACK WIDTH OF DESIGN VEHICLE.

- u - TRACK WIDTH OF DESIGN VEHICLE FROM APPROPRIATE TABLE.
- $V_D$  - DESIGN VELOCITY.
- w - CALCULATED WIDENING.
- W - PAVEMENT WIDTH
- $W_C$  - CALCULATED TOTAL CURVE WIDTH.
- $W_n$  - WIDTH OF LANE.
- Z - CALCULATED EXTRA WIDTH ALLOWANCE.

**GENERAL DESIGN CONSIDERATIONS**

- WHERE PAVEMENT WIDENING IS REQUIRED, THE APPROPRIATE WIDENING IS ADDED TO THE LANE WIDTH WHEN CALCULATING THE SUPERELEVATION RUNOFF LENGTH ( $L_r$ ).
- THE COMPUTED SUPERELEVATION RUNOFF LENGTH ( $L_r$ ) IS ROUNDED UP TO THE NEAREST FOOT.
- WHEN THE SUPERELEVATION RUNOFF LENGTH ( $L_r$ ) IS CALCULATED, IT MUST BE COMPARED WITH THE MINIMUM VALUE LISTED IN THE APPROPRIATE COLUMN ON THE RELATIVE GRADIENT TABLE.
- TANGENT RUNOUT ( $L_t$ ) IS ALWAYS ACHIEVED OUTSIDE OF THE SUPERELEVATION RUNOFF SECTION ( $L_r$ ).
- NO PAVEMENT WIDENING IS REQUIRED FOR URBAN ROADWAYS.
- NO PAVEMENT WIDENING IS REQUIRED FOR RURAL ROADWAYS WITH A CURVE RADIUS GREATER THAN 2865 FEET.
- NO PAVEMENT WIDENING IS REQUIRED FOR RURAL ROADWAYS WITH 12 FOOT WIDE LANES AND A CURVE RADIUS GREATER THAN 881 FEET.
- PAVEMENT WIDENING IS APPLIED ONLY WHEN CALCULATED WIDENING (w) IS EQUAL TO OR GREATER THAN 2 FEET.
- WHEN CALCULATING WIDENING (w) FOR MULTI-LANE RURAL ROADWAYS, WIDENING IS FIRST CALCULATED USING THE SINGLE LANE WIDTH FOR "W".
- AN ALTERNATE METHOD FOR MULTI-LANE UNDIVIDED PAVEMENTS (48'), THE  $L_r$  IS 1.5 TIMES (M-1.5) THE CORRESPONDING LENGTH FOR TWO LANE HIGHWAYS; AND FOR SIX LANE UNDIVIDED PAVEMENTS (72'), THE  $L_r$  IS TWO TIMES (M-2) THE CORRESPONDING LENGTH FOR TWO LANE HIGHWAYS.
- CALCULATED WIDENING IS ROUNDED UP TO THE NEAREST 0.1 FOOT.
- CURVES WITH SPIRAL CURVE TRANSITIONS MUST HAVE A MINIMUM SUPERELEVATION RUNOFF LENGTH ( $L_r$ ) EQUAL TO 2 SECONDS OF TRAVEL TIME AT THE ROADWAY'S DESIGN SPEED AS NOTED IN THE RELATIVE GRADIENT TABLE.

**NO WIDENING REQUIRED FORMULAS USED TO CALCULATE SUPERELEVATION RUNOFF ( $L_r$ ) AND WIDENING (w)**

$L_r = b_w (W_n n_1 E / rg)$   
 $L_r = M(WE/rg)$  (ALT. MULTI-LANE)

**WIDENING REQUIRED**  
 $L_r = b_w [E n_1 (W_n + w/N) / rg]$   
 $L_r = m[E(W_n + w/N) / rg]$  (ALT. MULTI-LANE)

$U = u + R - \sqrt{R^2 - L^2}$

$F_A = \sqrt{R^2 + A(2L + A)} - R$

$Z = (V_D / \sqrt{R})$

$W_C = N(U + C) + F_A + Z$

$w = W_C - 2W_n$

FOR SOLVED PROBLEMS USING THIS METHODOLOGY, SEE THE EXAMPLES ON PAGE 802.22

SPECIFICATION REFERENCE

**METHODOLOGIES FOR CALCULATING TC-5.01 VALUES**



ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

802.21

**RURAL EXAMPLE**20 FT PAVEMENT WIDTH  
(DESIGN SOFTWARE - 1 LANE AT 10 FT)

$$V_D = 50 \text{ MPH} \quad R = 1000 \text{ FT}$$

$$W_n = 10 \text{ FT} \quad rg = 0.50$$

$$E = 7.6 \text{ (7.6\% PER 802.40)}$$

$$U = u + R - \sqrt{R^2 - L^2}$$

$$U = 8.0 + 1000 - \sqrt{(1000)^2 - (20)^2}$$

$$U = 8.20002$$

$$F_A = \sqrt{R^2 + A(2L + A)} - R$$

$$F_A = \sqrt{(1000)^2 + 4[2(20) + 4]} - 1000$$

$$F_A = .087996$$

$$Z = (V_D / \sqrt{R})$$

$$Z = (50 / \sqrt{1000})$$

$$Z = 1.58$$

$$W_C = N(U + C) + F_A + Z$$

$$W_C = 2(8.20002 + 2) + 0.087996 + 1.58$$

$$W_C = 22.0680$$

$$w = W_C - 2W_n = 22.0680 - 2(10) = 2.1$$

(R < 2865 & w > 2 THEREFORE WIDENING IS REQUIRED)

$$L_r = [E n_s (W_n + w/2) / rg] b_w$$

$$L_r = [7.6(1)(10 + 2.1/2) / 0.50] 1$$

$$L_r = 7.6 (11.05) / 0.50$$

$$L_r = 167.96$$

**RURAL EXAMPLE**72 FT PAVEMENT WIDTH  
(DESIGN SOFTWARE - 3 LANES AT 12 FT)

$$V_D = 40 \text{ MPH} \quad R = 500 \text{ FT}$$

$$W_n = 12 \text{ FT} \quad rg = 0.58$$

$$E = 8.0 \text{ (8\% PER PAGE 802.38)}$$

$$U = u + R - \sqrt{R^2 - L^2}$$

$$U = 8.0 + 500 - \sqrt{(500)^2 - (20)^2}$$

$$U = 8.4002$$

$$F_A = \sqrt{R^2 + A(2L + A)} - R$$

$$F_A = \sqrt{(500)^2 + 4[2(20) + 4]} - 500$$

$$F_A = .1760$$

$$Z = (V_D / \sqrt{R})$$

$$Z = (40 / \sqrt{500})$$

$$Z = 1.7885$$

$$W_C = 2(U + C) + F_A + Z$$

$$W_C = 2(8.4002 + 3.0) + .1760 + 1.7885$$

$$W_C = 24.7651$$

$$w = W_C - 2W_n = 24.7651 - 2(12) = 0.7651(0.8)$$

FOR 72' PAVEMENT WIDTH

$$w = 3(0.8) = 2.4$$

(R &lt; 881 &amp; w &gt; 2 THEREFORE WIDENING IS REQUIRED)

$$L_r = [E n_s (W_n + w/3) / rg] b_w$$

$$L_r = [8 (3) (12 + 2.4/3) / 0.58] 0.6667$$

$$L_r = (307.2 / 0.58) 0.6667$$

$$L_r = 353.1211$$

OR

$$L_r = M[E(W_n + w/N) / rg]$$

$$L_r = 2 [8(12 + 4.5/3) / 0.58]$$

$$L_r = 2 (102.4 / 0.58)$$

$$L_r = 353.1034$$

**URBAN EXAMPLES**24 FT PAVEMENT WIDTH  
(DESIGN SOFTWARE - 1 LANE AT 12 FT)

$$V_D = 40 \text{ MPH} \quad R = 600 \text{ FT}$$

$$W_n = 12 \text{ FT} \quad rg = 0.58$$

$$E = 4.0 \text{ (4\% PER PAGE 802.29)}$$

$$L_r = (W_n n_s E / rg) b_w$$

$$L_r = [12(1)(4) / 0.58] 1.00$$

$$L_r = (48 / 0.58)$$

$$L_r = 82.7586$$

66 FT PAVEMENT WIDTH  
(DESIGN SOFTWARE - 3 LANES AT 11 FT)

$$V_D = 40 \text{ MPH} \quad R = 600 \text{ FT}$$

$$W_n = 11 \text{ FT} \quad rg = 0.58$$

$$E = 4.0 \text{ (4\% PER PAGE 802.29)}$$

$$L_r = b_w (W_n n_s E / rg)$$

$$L_r = 0.6667 [11(3)(4) / 0.58]$$

$$L_r = 0.6667 (132 / 0.58)$$

$$L_r = 151.7317$$

OR

$$L_r = M (E W_n / rg)$$

$$L_r = 2 [4(11) / 0.58]$$

$$L_r = 2 (44 / 0.58)$$

$$L_r = 151.7241$$



ROAD AND BRIDGE STANDARDS

**CALCULATED TC-5.01 EXAMPLES**SPECIFICATION  
REFERENCE

SHEET 1 OF 1

REVISION DATE

802.22

VIRGINIA DEPARTMENT OF TRANSPORTATION



**MINIMUM RADII AND SUPERELEVATION RUNOFF SECTION LENGTHS (L<sub>r</sub>) FOR +2% SUPERELEVATION**

RADIUS (FEET)	E (%)	f	DV (MPH)	LENGTH OF SUPERELEVATION RUNOFF (L <sub>r</sub> ) IN FEET						
				PAVEMENT WIDTH (W)						W > 72'
				24' (1@12')	36' (1.5@12')	48' (2@12')	60' (3@10')	66' (3@11')	72' (3@12')	
> 795	2.0	0.150	45	45	56	67	75	82	90	*
593	2.0	0.160	40	42	52	63	70	77	84	*
408	2.0	0.180	35	39	49	59	65	72	78	*
273	2.0	0.200	30	37	46	55	61	67	74	*
167	2.0	0.230	25	35	43	52	58	64	69	*
92	2.0	0.270	20	33	41	49	55	60	66	*

\* FOR PAVEMENT WIDTHS GREATER THAN 72 FEET USE L<sub>r</sub> VALUES DEVELOPED BY THE DESIGN SOFTWARE.

**MINIMUM RADII FOR DESIGNS  
UTILIZING -2% SUPERELEVATION NORMAL PAVEMENT CROWN**

RADIUS (FEET)	f	NC (MPH)
> 1039	.150	45
762	.160	40
510	.180	35
333	.200	30
198	.230	25
107	.270	20

SPECIFICATION  
REFERENCE

**SUMMARY OF STD. TC-5.04 ULS  
URBAN-LOW SPEED DESIGN FACTORS**

VIRGINIA DEPARTMENT OF TRANSPORTATION



ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

802.23

**DESIGN FACTORS FOR A DESIGN SPEED OF 20 MPH  
(URBAN) USING E= 4% MAX.**

RADIUS (FEET)	E (%)	PAVEMENT WIDTH											
		24 FT		36 FT		48 FT		60 FT		66 FT		72 FT	
		DESIGN SOFTWARE EQUIVALENTS (NUMBER OF LANES AT LANE WIDTH)											
		1 @ 12'		1.5 @ 12'		2 @ 12'		3 @ 10'		3 @ 11'		3 @ 12'	
		Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr
1400	NC	0	0	0	0	0	0	0	0	0	0	0	0
961	2.0	33	33	41	41	49	49	55	55	60	60	65	65
884	2.1	33	35	41	43	49	52	55	57	60	63	65	69
810	2.2	33	36	41	45	49	54	55	60	60	66	65	72
735	2.3	33	38	41	47	49	56	55	63	60	69	65	75
653	2.4	33	39	41	49	49	59	55	65	60	72	65	78
578	2.5	33	41	41	51	49	61	55	68	60	75	65	82
516	2.6	33	43	41	53	49	64	55	71	60	78	65	85
464	2.7	33	44	41	55	49	66	55	73	60	81	65	88
421	2.8	33	46	41	57	49	69	55	76	60	84	65	91
383	2.9	33	48	41	59	49	71	55	79	60	87	65	95
351	3.0	33	49	41	61	49	73	55	82	60	90	65	98
322	3.1	33	51	41	63	49	76	55	84	60	93	65	101
296	3.2	33	52	41	65	49	78	55	87	60	96	65	104
273	3.3	33	54	41	67	49	81	55	90	60	99	65	108
252	3.4	33	56	41	69	49	83	55	92	60	102	65	111
232	3.5	33	57	41	71	49	86	55	95	60	105	65	114
214	3.6	33	59	41	73	49	88	55	98	60	108	65	117
196	3.7	33	60	41	75	49	90	55	100	60	110	65	120
179	3.8	33	62	41	77	49	93	55	103	60	113	65	124
160	3.9	33	64	41	79	49	95	55	106	60	116	65	127
127	4.0	33	65	41	81	49	98	55	109	60	119	65	130

NOTE:

Lt AND Lr VALUES IN FEET.

FOR PAVEMENT WIDTHS GREATER THAN 72 FEET USE Lr VALUES DEVELOPED BY THE DESIGN SOFTWARE.

LISTED RADIUS IS THE MINIMUM ALLOWABLE RADIUS FOR THE CORRESPONDING E, Lt, AND Lr VALUES.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

802.24

**TRANSITION CURVES - URBAN  
20 MPH DESIGN SPEED**

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

**DESIGN FACTORS FOR A DESIGN SPEED OF 25 MPH  
(URBAN) USING E= 4% MAX.**

RADIUS (FEET)	E (%)	PAVEMENT WIDTH											
		24 FT		36 FT		48 FT		60 FT		66 FT		72 FT	
		DESIGN SOFTWARE EQUIVALENTS (NUMBER OF LANES AT LANE WIDTH)											
		1 @ 12'		1.5 @ 12'		2 @ 12'		3 @ 10'		3 @ 11'		3 @ 12'	
		Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr
2500	NC	0	0	0	0	0	0	0	0	0	0	0	0
1407	2.0	35	35	43	43	52	52	58	58	63	63	69	69
1299	2.1	35	36	43	45	52	54	58	60	63	66	69	72
1195	2.2	35	38	43	48	52	57	58	63	63	70	69	76
1094	2.3	35	40	43	50	52	60	58	66	63	73	69	79
990	2.4	35	42	43	52	52	62	58	69	63	76	69	83
883	2.5	35	43	43	54	52	65	58	72	63	79	69	86
793	2.6	35	45	43	56	52	67	58	75	63	82	69	90
718	2.7	35	47	43	58	52	70	58	78	63	85	69	93
654	2.8	35	48	43	60	52	72	58	80	63	88	69	96
598	2.9	35	50	43	63	52	75	58	83	63	92	69	100
548	3.0	35	52	43	65	52	78	58	86	63	95	69	103
505	3.1	35	54	43	67	52	80	58	89	63	98	69	107
466	3.2	35	55	43	69	52	83	58	92	63	101	69	110
430	3.3	35	57	43	71	52	85	58	95	63	104	69	114
397	3.4	35	59	43	73	52	88	58	98	63	107	69	117
367	3.5	35	60	43	75	52	90	58	100	63	110	69	120
339	3.6	35	62	43	78	52	93	58	103	63	114	69	124
311	3.7	35	64	43	80	52	96	58	106	63	117	69	127
284	3.8	35	66	43	82	52	98	58	109	63	120	69	131
255	3.9	35	67	43	84	52	101	58	112	63	123	69	134
204	4.0	35	69	43	86	52	103	58	115	63	126	69	138

NOTE:

Lt AND Lr VALUES IN FEET.

FOR PAVEMENT WIDTHS GREATER THAN 72 FEET USE Lr VALUES DEVELOPED BY THE DESIGN SOFTWARE.

LISTED RADIUS IS THE MINIMUM ALLOWABLE RADIUS FOR THE CORRESPONDING E, Lt, AND Lr VALUES.

SPECIFICATION  
REFERENCE

**TRANSITION CURVES - URBAN  
25 MPH DESIGN SPEED**

VIRGINIA DEPARTMENT OF TRANSPORTATION



ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

802.25

DESIGN FACTORS FOR A DESIGN SPEED OF 30 MPH (URBAN) USING E= 4% MAX.													
RADIUS (FEET)	E (%)	PAVEMENT WIDTH											
		24 FT		36 FT		48 FT		60 FT		66 FT		72 FT	
		DESIGN SOFTWARE EQUIVALENTS (NUMBER OF LANES AT LANE WIDTH)											
		1 @ 12'		1.5 @ 12'		2 @ 12'		3 @ 10'		3 @ 11'		3 @ 12'	
		Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr
3000	NC	0	0	0	0	0	0	0	0	0	0	0	0
1940	2.0	37	37	46	46	55	55	61	61	67	67	73	73
1795	2.1	37	39	46	48	55	58	61	64	67	70	73	77
1658	2.2	37	40	46	50	55	60	61	67	67	74	73	80
1525	2.3	37	42	46	53	55	63	61	70	67	77	73	84
1393	2.4	37	44	46	55	55	66	61	73	67	80	73	88
1255	2.5	37	46	46	57	55	69	61	76	67	84	73	91
1134	2.6	37	48	46	60	55	71	61	79	67	87	73	95
1030	2.7	37	50	46	62	55	74	61	82	67	90	73	99
941	2.8	37	51	46	64	55	77	61	85	67	94	73	102
863	2.9	37	53	46	66	55	80	61	88	67	97	73	106
794	3.0	37	55	46	69	55	82	61	91	67	100	73	110
732	3.1	37	57	46	71	55	85	61	94	67	104	73	113
677	3.2	37	59	46	73	55	88	61	97	67	107	73	117
627	3.3	37	60	46	75	55	90	61	100	67	110	73	120
580	3.4	37	62	46	78	55	93	61	104	67	114	73	124
537	3.5	37	64	46	80	55	96	61	107	67	117	73	128
496	3.6	37	66	46	82	55	99	61	110	67	120	73	131
457	3.7	37	68	46	85	55	101	61	113	67	124	73	135
417	3.8	37	70	46	87	55	104	61	116	67	127	73	139
375	3.9	37	71	46	89	55	107	61	119	67	130	73	142
300	4.0	37	73	46	91	55	110	61	122	67	134	73	146

NOTE:

Lt AND Lr VALUES IN FEET.

FOR PAVEMENT WIDTHS GREATER THAN 72 FEET USE Lr VALUES DEVELOPED BY THE DESIGN SOFTWARE.

LISTED RADIUS IS THE MINIMUM ALLOWABLE RADIUS FOR THE CORRESPONDING E, Lt, AND Lr VALUES.



## TRANSITION CURVES - URBAN 30 MPH DESIGN SPEED

**DESIGN FACTORS FOR A DESIGN SPEED OF 35 MPH  
(URBAN) USING E= 4% MAX.**

RADIUS (FEET)	E (%)	PAVEMENT WIDTH											
		24 FT		36 FT		48 FT		60 FT		66 FT		72 FT	
		DESIGN SOFTWARE EQUIVALENTS (NUMBER OF LANES AT LANE WIDTH)											
		1 @ 12'		1.5 @ 12'		2 @ 12'		3 @ 10'		3 @ 11'		3 @ 12'	
Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	CR	Lr		
4000	NC	0	0	0	0	0	0	0	0	0	0	0	0
2561	2.0	39	39	49	49	59	59	65	65	71	71	78	78
2374	2.1	39	41	49	51	59	61	65	68	71	75	78	82
2199	2.2	39	43	49	54	59	64	65	71	71	79	78	86
2031	2.3	39	45	49	56	59	67	65	75	71	82	78	90
1866	2.4	39	47	49	59	59	70	65	78	71	86	78	93
1697	2.5	39	49	49	61	59	73	65	81	71	89	78	97
1538	2.6	39	51	49	63	59	76	65	84	71	93	78	101
1403	2.7	39	53	49	66	59	79	65	88	71	96	78	105
1285	2.8	39	55	49	68	59	82	65	91	71	100	78	109
1182	2.9	39	57	49	71	59	85	65	94	71	103	78	113
1090	3.0	39	59	49	73	59	88	65	97	71	107	78	117
1008	3.1	39	60	49	75	59	90	65	100	71	110	78	120
933	3.2	39	62	49	78	59	93	65	104	71	114	78	124
865	3.3	39	64	49	80	59	96	65	107	71	118	78	128
802	3.4	39	66	49	83	59	99	65	110	71	121	78	132
743	3.5	39	68	49	85	59	102	65	113	71	125	78	136
688	3.6	39	70	49	88	59	105	65	117	71	128	78	140
634	3.7	39	72	49	90	59	108	65	120	71	132	78	144
580	3.8	39	74	49	92	59	111	65	123	71	135	78	148
522	3.9	39	76	49	95	59	114	65	126	71	139	78	151
420	4.0	39	78	49	97	59	117	65	130	71	142	78	155

NOTE:

Lt AND Lr VALUES IN FEET.

FOR PAVEMENT WIDTHS GREATER THAN 72 FEET USE Lr VALUES DEVELOPED BY THE DESIGN SOFTWARE.

LISTED RADIUS IS THE MINIMUM ALLOWABLE RADIUS FOR THE CORRESPONDING E, Lt, AND Lr VALUES.

SPECIFICATION  
REFERENCE

**TRANSITION CURVES - URBAN  
35 MPH DESIGN SPEED**

VIRGINIA DEPARTMENT OF TRANSPORTATION

**VDOT**

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

802.27

DESIGN FACTORS FOR A DESIGN SPEED OF 40 MPH (URBAN) USING E= 4% MAX.													
RADIUS (FEET)	E (%)	PAVEMENT WIDTH											
		24 FT		36 FT		48 FT		60 FT		66 FT		72 FT	
		DESIGN SOFTWARE EQUIVALENTS (NUMBER OF LANES AT LANE WIDTH)											
		1 @ 12'		1.5 @ 12'		2 @ 12'		3 @ 10'		3 @ 11'		3 @ 12'	
		Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr
5000	NC	0	0	0	0	0	0	0	0	0	0	0	0
3273	2.0	42	42	52	52	63	63	69	69	76	76	83	83
3039	2.1	42	44	52	55	63	66	69	73	76	80	83	87
2820	2.2	42	46	52	57	63	69	69	76	76	84	83	92
2612	2.3	42	48	52	60	63	72	69	80	76	88	83	96
2411	2.4	42	50	52	63	63	75	69	83	76	92	83	100
2209	2.5	42	52	52	65	63	78	69	87	76	95	83	104
2010	2.6	42	54	52	68	63	81	69	90	76	99	83	108
1839	2.7	42	56	52	70	63	84	69	94	76	103	83	112
1689	2.8	42	58	52	73	63	87	69	97	76	107	83	116
1557	2.9	42	60	52	75	63	90	69	100	76	110	83	120
1439	3.0	42	63	52	78	63	94	69	104	76	114	83	125
1332	3.1	42	65	52	81	63	97	69	107	76	118	83	129
1236	3.2	42	67	52	83	63	100	69	111	76	122	83	133
1148	3.3	42	69	52	86	63	103	69	114	76	126	83	137
1066	3.4	42	71	52	88	63	106	69	118	76	129	83	141
989	3.5	42	73	52	91	63	109	69	121	76	133	83	145
916	3.6	42	75	52	94	63	112	69	125	76	137	83	149
845	3.7	42	77	52	96	63	115	69	128	76	141	83	154
774	3.8	42	79	52	99	63	118	69	132	76	145	83	158
698	3.9	42	81	52	101	63	122	69	135	76	148	83	162
563	4.0	42	83	52	104	63	125	69	138	76	152	83	166

NOTE:

Lt AND Lr VALUES IN FEET.

FOR PAVEMENT WIDTHS GREATER THAN 72 FEET USE Lr VALUES DEVELOPED BY THE DESIGN SOFTWARE.

LISTED RADIUS IS THE MINIMUM ALLOWABLE RADIUS FOR THE CORRESPONDING E, Lt, AND Lr VALUES.



**DESIGN FACTORS FOR A DESIGN SPEED OF 45 MPH  
(URBAN) USING E= 4% MAX.**

RADIUS (FEET)	E (%)	PAVEMENT WIDTH											
		24 FT		36 FT		48 FT		60 FT		66 FT		72 FT	
		DESIGN SOFTWARE EQUIVALENTS (NUMBER OF LANES AT LANE WIDTH)											
		1 @ 12'		1.5 @ 12'		2 @ 12'		3 @ 10'		3 @ 11'		3 @ 12'	
Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr
6000	NC	0	0	0	0	0	0	0	0	0	0	0	0
4076	2.0	45	45	56	56	67	67	75	75	82	82	89	89
3790	2.1	45	47	56	59	67	70	75	78	82	86	89	94
3523	2.2	45	49	56	62	67	74	75	82	82	90	89	98
3271	2.3	45	52	56	64	67	77	75	86	82	94	89	103
3029	2.4	45	54	56	67	67	80	75	89	82	98	89	107
2790	2.5	45	56	56	70	67	84	75	93	82	102	89	112
2552	2.6	45	58	56	73	67	87	75	97	82	106	89	116
2341	2.7	45	60	56	75	67	90	75	100	82	110	89	120
2155	2.8	45	63	56	78	67	94	75	104	82	115	89	125
1990	2.9	45	65	56	81	67	97	75	108	82	119	89	129
1843	3.0	45	67	56	84	67	100	75	112	82	123	89	134
1710	3.1	45	69	56	87	67	104	75	115	82	127	89	138
1589	3.2	45	72	56	89	67	107	75	119	82	131	89	143
1477	3.3	45	74	56	92	67	110	75	123	82	135	89	147
1374	3.4	45	76	56	95	67	114	75	126	82	139	89	152
1276	3.5	45	78	56	98	67	117	75	130	82	143	89	156
1184	3.6	45	80	56	100	67	120	75	134	82	147	89	160
1093	3.7	45	83	56	103	67	124	75	138	82	151	89	165
1003	3.8	45	85	56	106	67	127	75	141	82	155	89	169
905	3.9	45	87	56	109	67	130	75	145	82	159	89	174
730	4.0	45	89	56	112	67	134	75	149	82	163	89	178

**NOTE:**

Lt AND Lr VALUES IN FEET.

FOR PAVEMENT WIDTHS GREATER THAN 72 FEET USE Lr VALUES DEVELOPED BY THE DESIGN SOFTWARE.

LISTED RADIUS IS THE MINIMUM ALLOWABLE RADIUS FOR THE CORRESPONDING E, Lt, AND Lr VALUES.

SPECIFICATION REFERENCE

**TRANSITION CURVES - URBAN  
45 MPH DESIGN SPEED**

VIRGINIA DEPARTMENT OF TRANSPORTATION



ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

802.29

DESIGN FACTORS FOR A DESIGN SPEED OF 50 MPH  
(URBAN) USING E= 4 % MAX.

RADIUS (FEET)	E (%)	PAVEMENT WIDTH											
		24 FT		36 FT		48 FT		60 FT		66 FT		72 FT	
		DESIGN SOFTWARE EQUIVALENTS (NUMBER OF LANES AT LANE WIDTH)											
		1 e 12'		1.5 e 12'		2 e 12'		3 e 10'		3 e 11'		3 e 12'	
Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr		
8000	NC	0	0	0	0	0	0	0	0	0	0	0	
4792	2.0	48	48	60	60	72	72	80	80	88	88	96	96
4629	2.1	48	51	60	63	72	76	80	84	88	93	96	101
4310	2.2	48	53	60	66	72	80	80	88	88	97	96	106
4010	2.3	48	56	60	69	72	83	80	92	88	102	96	111
3723	2.4	48	58	60	72	72	87	80	96	88	106	96	116
3444	2.5	48	60	60	75	72	90	80	100	88	110	96	120
3166	2.6	48	63	60	78	72	94	80	104	88	115	96	125
2911	2.7	48	65	60	81	72	98	80	108	88	119	96	130
2686	2.8	48	68	60	84	72	101	80	112	88	124	96	135
2486	2.9	48	70	60	87	72	105	80	116	88	128	96	140
2306	3.0	48	72	60	90	72	108	80	120	88	132	96	144
2143	3.1	48	75	60	93	72	112	80	124	88	137	96	149
1994	3.2	48	77	60	96	72	116	80	128	88	141	96	154
1857	3.3	48	80	60	99	72	119	80	132	88	146	96	159
1729	3.4	48	82	60	102	72	123	80	136	88	150	96	164
1608	3.5	48	84	60	105	72	126	80	140	88	154	96	168
1493	3.6	48	87	60	108	72	130	80	144	88	159	96	173
1381	3.7	48	89	60	111	72	134	80	148	88	163	96	178
1268	3.8	48	92	60	114	72	137	80	152	88	168	96	183
1146	3.9	48	94	60	117	72	141	80	156	88	172	96	188
929	4.0	48	96	60	120	72	144	80	160	88	176	96	192

NOTE:

Lt AND Lr VALUES IN FEET.

FOR PAVEMENT WIDTHS GREATER THAN 72 FEET USE Lr VALUES DEVELOPED BY THE DESIGN SOFTWARE.

LISTED RADIUS IS THE MINIMUM ALLOWABLE RADIUS FOR THE CORRESPONDING E, Lt AND Lr VALUES.



ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

802.30

TRANSITION CURVES - URBAN  
50 MPH DESIGN SPEED

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE



**DESIGN FACTORS FOR A DESIGN SPEED OF 55 MPH  
(URBAN) USING E= 4% MAX.**

RADIUS (FEET)	E (%)	PAVEMENT WIDTH											
		24 FT		36 FT		48 FT		60 FT		66 FT		72 FT	
		DESIGN SOFTWARE EQUIVALENTS (NUMBER OF LANES AT LANE WIDTH)											
		1 @ 12'		1.5 @ 12'		2 @ 12'		3 @ 10'		3 @ 11'		3 @ 12'	
		Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr	Lt	Lr
10000	NC	0	0	0	0	0	0	0	0	0	0	0	0
5995	2.0	52	52	64	64	77	77	86	86	94	94	103	103
5592	2.1	52	54	64	68	77	81	86	90	94	99	103	108
5218	2.2	52	57	64	71	77	85	86	94	94	103	103	113
4869	2.3	52	59	64	74	77	89	86	98	94	108	103	118
4538	2.4	52	62	64	77	77	92	86	103	94	113	103	123
4220	2.5	52	64	64	80	77	96	86	107	94	118	103	128
3909	2.6	52	67	64	83	77	100	86	111	94	122	103	133
3610	2.7	52	69	64	87	77	104	86	115	94	127	103	138
3343	2.8	52	72	64	90	77	108	86	120	94	132	103	143
3104	2.9	52	75	64	93	77	112	86	124	94	136	103	149
2888	3.0	52	77	64	96	77	115	86	128	94	141	103	154
2691	3.1	52	80	64	99	77	119	86	132	94	146	103	159
2510	3.2	52	82	64	103	77	123	86	137	94	150	103	164
2343	3.3	52	85	64	106	77	127	86	141	94	155	103	169
2186	3.4	52	87	64	109	77	131	86	145	94	160	103	174
2037	3.5	52	90	64	112	77	135	86	149	94	164	103	179
1895	3.6	52	92	64	115	77	138	86	154	94	169	103	184
1756	3.7	52	95	64	119	77	142	86	158	94	174	103	189
1615	3.8	52	98	64	122	77	146	86	162	94	178	103	195
1462	3.9	52	100	64	125	77	150	86	166	94	183	103	200
1190	4.0	52	103	64	128	77	154	86	171	94	188	103	205

NOTE:

Lt AND Lr VALUES IN FEET.

FOR PAVEMENT WIDTHS GREATER THAN 72 FEET USE Lr VALUES DEVELOPED BY THE DESIGN SOFTWARE.

LISTED RADIUS IS THE MINIMUM ALLOWABLE RADIUS FOR THE CORRESPONDING E, Lt, AND Lr VALUES.

SPECIFICATION  
REFERENCE

**TRANSITION CURVES - URBAN  
55 MPH DESIGN SPEED**

VIRGINIA DEPARTMENT OF TRANSPORTATION

**VDOT**

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

802.31

















DESIGN VELOCITY -55	DESIGN FACTORS FOR A DESIGN SPEED OF 55 MPH (RURAL) USING E= 8% MAX.												INTERCHANGE RAMPS															
	WIDTH-18 FT			WIDTH-20 FT			WIDTH-22 FT			WIDTH-24 FT			WIDTH-48 FT			WIDTH-72 FT			WIDTH									
	DESIGN SOFTWARE EQUIVALENTS (NUMBER OF LANES AT LANE WIDTH)																											
	1 @ 9'			1 @ 10'			1 @ 11'			1 @ 12'			2 @ 12'			3 @ 12'			16 FT			18 FT						
RADIUS(FT)	E(%)	Lt	Lr	w	Lt	Lr	w	Lt	Lr	w	Lt	Lr	w	Lt	Lr	w	Lt	Lr	w	Lt	Lr	w	Lt	Lr	w	Lt	Lr	w
10000	NC	0	0	0.0	0	0.0	0	0.0	0	0.0	0	0.0	0	0.0	0	0.0	0	0.0	0	0.0	0	0.0	0	0.0	0	0.0	0	0.0
7190	2.0	39	39	0.0	43	43	0.0	47	47	0.0	52	52	0.0	77	77	0.0	103	103	0.0	130	130	0.0	160	160	0.0	200	200	0.0
6821	2.1	39	41	0.0	43	45	0.0	47	50	0.0	52	54	0.0	77	81	0.0	103	108	0.0	130	138	0.0	160	166	0.0	200	206	0.0
6485	2.2	39	43	0.0	43	47	0.0	47	52	0.0	52	57	0.0	77	85	0.0	103	113	0.0	130	143	0.0	160	166	0.0	200	206	0.0
6179	2.3	39	45	0.0	43	49	0.0	47	54	0.0	52	59	0.0	77	89	0.0	103	118	0.0	130	148	0.0	160	169	0.0	200	206	0.0
5897	2.4	39	46	0.0	43	52	0.0	47	57	0.0	52	62	0.0	77	92	0.0	103	123	0.0	130	151	0.0	160	172	0.0	200	206	0.0
5638	2.5	39	48	0.0	43	54	0.0	47	59	0.0	52	64	0.0	77	96	0.0	103	128	0.0	130	161	0.0	160	175	0.0	200	206	0.0
5399	2.6	39	50	0.0	43	56	0.0	47	61	0.0	52	67	0.0	77	100	0.0	103	133	0.0	130	174	0.0	160	178	0.0	200	206	0.0
5177	2.7	39	52	0.0	43	58	0.0	47	64	0.0	52	69	0.0	77	104	0.0	103	138	0.0	130	181	0.0	160	181	0.0	200	206	0.0
4972	2.8	39	54	0.0	43	60	0.0	47	66	0.0	52	72	0.0	77	108	0.0	103	143	0.0	130	190	0.0	160	183	0.0	200	206	0.0
4779	2.9	39	56	0.0	43	62	0.0	47	68	0.0	52	75	0.0	77	112	0.0	103	149	0.0	130	199	0.0	160	186	0.0	200	206	0.0
4600	3.0	39	58	0.0	43	64	0.0	47	71	0.0	52	77	0.0	77	115	0.0	103	154	0.0	130	205	0.0	160	189	0.0	200	206	0.0
4432	3.1	39	60	0.0	43	66	0.0	47	73	0.0	52	80	0.0	77	119	0.0	103	159	0.0	130	211	0.0	160	192	0.0	200	206	0.0
4274	3.2	39	62	0.0	43	69	0.0	47	75	0.0	52	82	0.0	77	123	0.0	103	164	0.0	130	218	0.0	160	195	0.0	200	206	0.0
4125	3.3	39	64	0.0	43	71	0.0	47	78	0.0	52	85	0.0	77	127	0.0	103	169	0.0	130	225	0.0	160	198	0.0	200	206	0.0
3986	3.4	39	66	0.0	43	73	0.0	47	80	0.0	52	87	0.0	77	131	0.0	103	174	0.0	130	231	0.0	160	201	0.0	200	206	0.0
3853	3.5	39	68	0.0	43	75	0.0	47	82	0.0	52	90	0.0	77	135	0.0	103	179	0.0	130	238	0.0	160	204	0.0	200	206	0.0
3728	3.6	39	69	0.0	43	77	0.0	47	85	0.0	52	92	0.0	77	138	0.0	103	184	0.0	130	244	0.0	160	207	0.0	200	206	0.0
3610	3.7	39	71	0.0	43	79	0.0	47	87	0.0	52	95	0.0	77	142	0.0	103	189	0.0	130	250	0.0	160	210	0.0	200	206	0.0
3498	3.8	39	73	0.0	43	81	0.0	47	89	0.0	52	98	0.0	77	146	0.0	103	195	0.0	130	256	0.0	160	213	0.0	200	206	0.0
3391	3.9	39	75	0.0	43	83	0.0	47	92	0.0	52	100	0.0	77	150	0.0	103	200	0.0	130	262	0.0	160	216	0.0	200	206	0.0
3289	4.0	39	77	0.0	43	86	0.0	47	94	0.0	52	103	0.0	77	154	0.0	103	205	0.0	130	268	0.0	160	219	0.0	200	206	0.0
3192	4.1	39	79	0.0	43	88	0.0	47	96	0.0	52	105	0.0	77	158	0.0	103	210	0.0	130	274	0.0	160	222	0.0	200	206	0.0
3100	4.2	39	81	0.0	43	90	0.0	47	99	0.0	52	108	0.0	77	161	0.0	103	215	0.0	130	280	0.0	160	225	0.0	200	206	0.0
3011	4.3	39	83	0.0	43	92	0.0	47	101	0.0	52	110	0.0	77	165	0.0	103	220	0.0	130	286	0.0	160	228	0.0	200	206	0.0
2927	4.4	39	85	0.0	43	94	0.0	47	103	0.0	52	113	0.0	77	169	0.0	103	225	0.0	130	292	0.0	160	231	0.0	200	206	0.0
2865	4.5	72	161	2.2	43	96	0.0	47	106	0.0	52	115	0.0	77	173	0.0	103	230	0.0	130	298	0.0	160	234	0.0	200	206	0.0
2846	4.5	72	161	2.3	43	96	0.0	47	106	0.0	52	115	0.0	77	173	0.0	103	230	0.0	130	298	0.0	160	234	0.0	200	206	0.0
2788	4.6	70	161	2.3	43	98	0.0	47	108	0.0	52	118	0.0	77	177	0.0	103	235	0.0	130	304	0.0	160	237	0.0	200	206	0.0
2693	4.7	69	161	2.3	43	100	0.0	47	110	0.0	52	120	0.0	77	180	0.0	103	240	0.0	130	310	0.0	160	240	0.0	200	206	0.0
2621	4.8	68	161	2.3	43	103	0.0	47	113	0.0	52	123	0.0	77	184	0.0	103	246	0.0	130	316	0.0	160	243	0.0	200	206	0.0
2552	4.9	66	161	2.3	43	105	0.0	47	115	0.0	52	126	0.0	77	188	0.0	103	251	0.0	130	322	0.0	160	246	0.0	200	206	0.0
2486	5.0	65	161	2.3	43	107	0.0	47	118	0.0	52	128	0.0	77	192	0.0	103	256	0.0	130	328	0.0	160	249	0.0	200	206	0.0
2421	5.1	64	161	2.4	43	109	0.0	47	120	0.0	52	131	0.0	77	196	0.0	103	261	0.0	130	334	0.0	160	252	0.0	200	206	0.0
2359	5.2	62	161	2.4	43	111	0.0	47	122	0.0	52	133	0.0	77	200	0.0	103	266	0.0	130	340	0.0	160	255	0.0	200	206	0.0
2299	5.3	61	161	2.4	43	113	0.0	47	125	0.0	52	136	0.0	77	203	0.0	103	271	0.0	130	346	0.0	160	258	0.0	200	206	0.0
2241	5.4	60	161	2.4	43	115	0.0	47	127	0.0	52	138	0.0	77	207	0.0	103	276	0.0	130	352	0.0	160	261	0.0	200	206	0.0
2185	5.5	59	161	2.5	43	118	0.0	47	129	0.0	52	141	0.0	77	211	0.0	103	281	0.0	130	358	0.0	160	264	0.0	200	206	0.0
2130	5.6	58	161	2.5	43	120	0.0	47	132	0.0	52	143	0.0	77	215	0.0	103	286	0.0	130	364	0.0	160	267	0.0	200	206	0.0
2077	5.7	57	161	2.5	43	122	0.0	47	134	0.0	52	146	0.0	77	219	0.0	103	292	0.0	130	370	0.0	160	270	0.0	200	206	0.0
2026	5.8	56	161	2.5	43	124	0.0	47	136	0.0	52	149	0.0	77	223	0.0	103	297	0.0	130	376	0.0	160	273	0.0	200	206	0.0
1976	5.9	55	161	2.5	43	126	0.0	47	139	0.0	52	151	0.0	77	226	0.0	103	302	0.0	130	382	0.0	160	276	0.0	200	206	0.0
1927	6.0	54	161	2.6	43	128	0.0	47	141	0.0	52	154	0.0	77	230	0.0	103	307	0.0	130	388	0.0	160	279	0.0	200	206	0.0
1880	6.1	53	161	2.6	43	130	0.0	47	143	0.0	52	156	0.0	77	234	0.0	103	312	0.0	130	394	0.0	160	282	0.0	200	206	0.0
1833	6.2	52	161	2.6	43	132	0.0	47	146	0.0	52	159	0.0	77	238	0.0	103	317	0.0	130	400	0.0	160	285	0.0	200	206	0.0
1788	6.3	52	161	2.6	43	135	0.0	47	148	0.0	52	161	0.0	77	242	0.0	103	322	0.0	130	406	0.0	160	288	0.0	200	206	0.0
1743	6.4	51	161	2.6	43	137	0.0	47	150	0.0	52	164	0.0	77	246	0.0	103	327	0.0	130	412	0.0	160	291	0.0	200	206	0.0
1700	6.5	50	161	2.7	43	139	0.0	47	153	0.0	52	166	0.0	77	249	0.0	103	332	0.0	130	418	0.0	160	294	0.0	200	206	0.0
1657	6.6	49	161	2.7	43	141	0.0	47	155	0.0	52	169	0.0	77	253	0.0	103	338	0.0	130	424	0.0	160	297	0.0	200	206	0.0
1615	6.7	49	161	2.7	43	143	0.0	47	157	0.0	52	172	0.0	77	257	0.0	103	343	0.0	130	430	0.0	160	300	0.0	200	206	0.0
1573	6.8	48	161	2.7	43	145	0.0	47	160	0.0	52	174	0.0	77	261	0.0	103	348	0.0	130	436	0.0	160	303	0.0	200	206	0.0
1532	6.9	47	161																									





