


| LEFT OF TRAFFIC | | | |
|------------------|-----|----|----|
| SHOULDER WIDTH L | L1 | L2 | L3 |
| 15' | 10' | 2' | 3' |
| 15' | 4' | 8' | 3' |
| 15' | 3' | 9' | 3' |
| 13' | 3' | 7' | 3' |
| 12' | 10' | — | 2' |
| 11' | 3' | 5' | 3' |
| 8' | 4' | 2' | 2' |
| 8' | 3' | 3' | 2' |

| RIGHT OF TRAFFIC | | | |
|------------------|-----|----|----|
| SHOULDER WIDTH R | R1 | R2 | R3 |
| 15' | 10' | 2' | 3' |
| 15' | 6' | 6' | 3' |
| 13' | 8' | 2' | 3' |
| 11' | 6' | 2' | 3' |
| 9' | 6' | — | 3' |

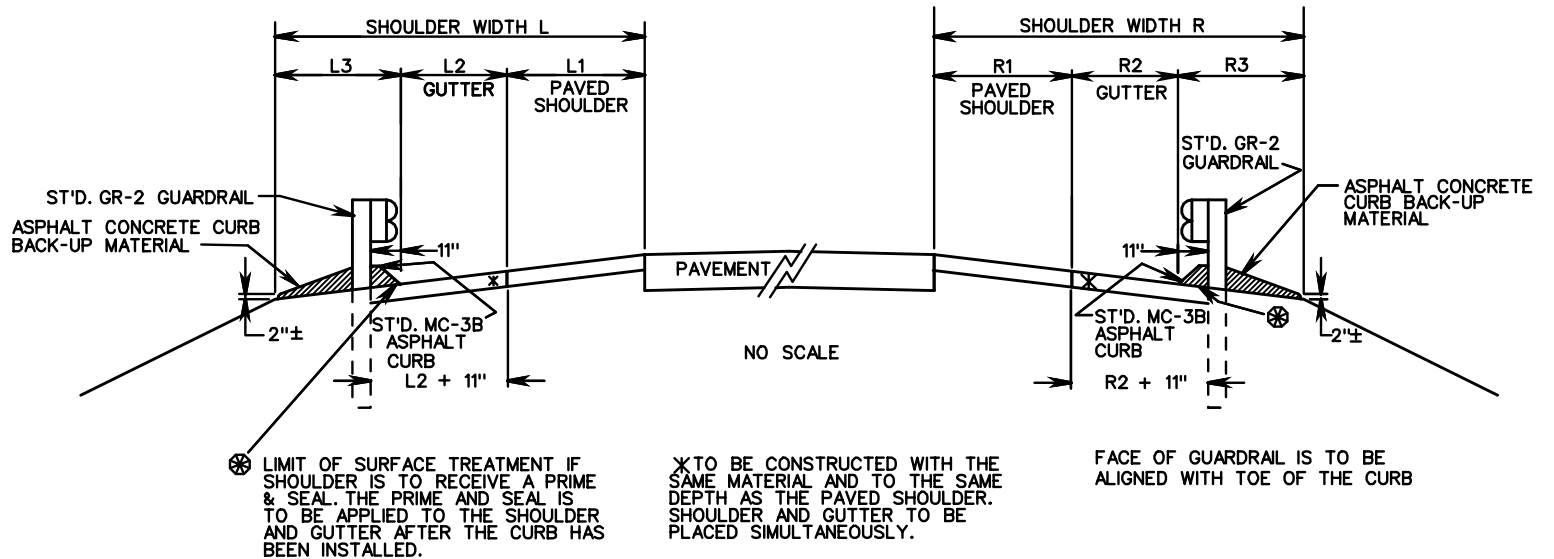

ST'D. GR-2 & MC-3B (11") ASPHALT CURB INSTALLATION

SPECIFICATION REFERENCE

105
502

ASPHALT CURB AND GUTTER (ASPHALT PAVING UNDER GUARDRAIL)

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 2

201.07