



PLAN VIEW

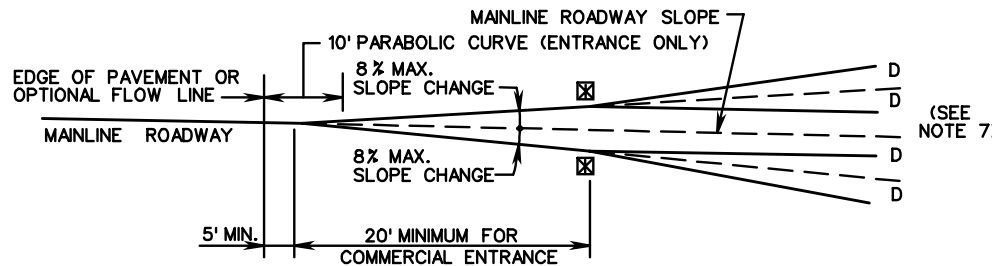

SECTION A - A

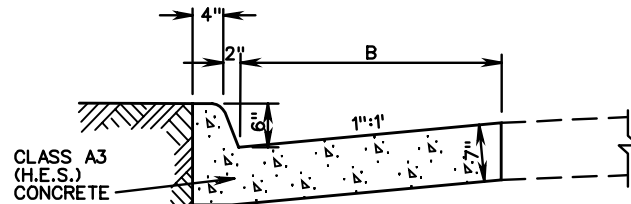

SECTION C-C

GENERAL NOTES

1. WHEN USED IN CONJUNCTION WITH STANDARD CG-3 OR CG-7, THE CURB FACE ON THIS STANDARD IS TO BE ADJUSTED TO MATCH THE MOUNTABLE CURB CONFIGURATION.
2. SEE STANDARD CG-12 FOR CURB RAMP DESIGN TO BE USED WITH THIS STANDARD.
3. MAINLINE PAVEMENT SHALL BE CONSTRUCTED TO THE R/W LINE (EXCEPT ANY SUBGRADE STABILIZATION REQUIRED FOR MAINLINE PAVEMENT WHICH CAN BE OMITTED IN THE ENTRANCE.)
4. RADIAL CURB OR COMBINATION CURB AND GUTTER SHALL NOT BE CONSTRUCTED BEYOND THE R/W LINE EXCEPT FOR REPLACEMENT PURPOSES.

ENTRANCE NOTES

5. WHEN THE ENTRANCE RADII CANNOT ACCOMMODATE THE TURNING REQUIREMENTS OF ANTICIPATED HEAVY TRUCK TRAFFIC, THE DEPTH FOR SIDEWALK & CURB RAMPS WITHIN THE LIMITS OF THE RADII SHOULD BE INCREASED TO 7". (SEE CG-13)
6. PLANS ARE TO INDICATE WHEN CONSTRUCTION OF A FLOW LINE IS REQUIRED TO PROVIDE POSITIVE DRAINAGE ACROSS THE ENTRANCE.
7. THE DESIRABLE AND MAXIMUM ENTRANCE GRADE CHANGES "D" ARE LISTED IN THE ALLOWABLE ENTRANCE GRADE TABLE. THESE VALUES ARE NOT APPLICABLE TO STREET CONNECTIONS.

INTERSECTION NOTES

8. WHEN CG-11 IS USED FOR STREET CONNECTIONS, THE CONNECTION MUST BE DESIGNED IN ACCORDANCE WITH AASHTO POLICY AND THE APPLICABLE REQUIREMENTS OF THE VDOT ROAD DESIGN MANUAL, INCLUDING STOPPING SIGHT DISTANCE AND K VALUE REQUIREMENTS.
9. OPTIONAL FLOWLINE MAY REQUIRE WARPING OF A PORTION OF GUTTER TO PROVIDE POSITIVE DRAINAGE ACROSS THE INTERSECTION.

ALLOWABLE ENTRANCE GRADE CHANGES

ENTRANCE VOLUME		GRADE CHANGE "D"	
		DESIRABLE	MAXIMUM
HIGH	MORE THAN 1500 VPD	0 %	3 %
MEDIUM	500-1500 VPD	≤ 3 %	6 %
LOW	LESS THAN 500 VPD	≤ 6 %	8 %

NOTE: ALLOWABLE ENTRANCE GRADE TABLE IS NOT APPLICABLE TO STREET CONNECTIONS

SPECIFICATION REFERENCE

502

METHOD OF TREATMENT
(CONNECTION FOR STREET INTERSECTIONS AND COMMERCIAL ENTRANCES)

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

203.04