


LEAVE OUT JOINT
FOR USE WITH STEEL BAR REINFORCEMENT

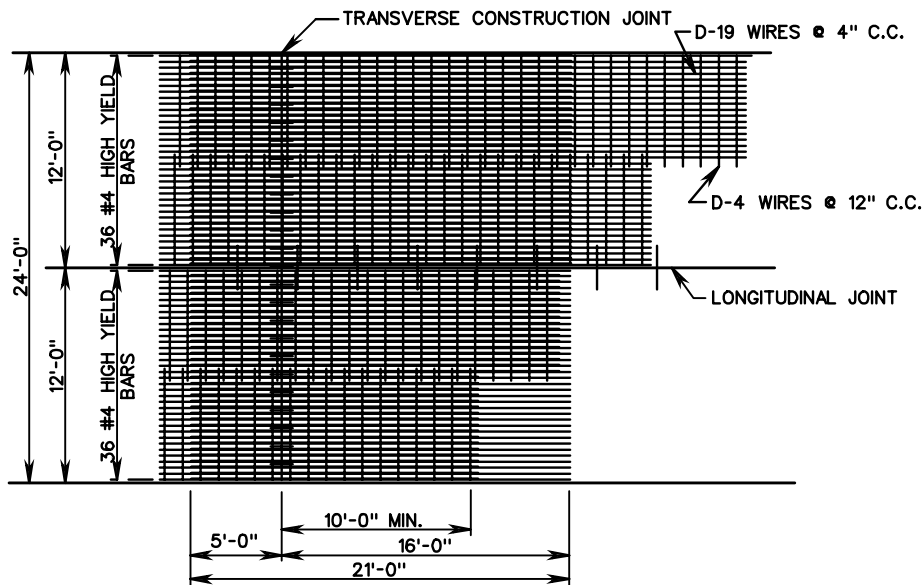

LEAVE OUT JOINT
FOR USE WITH WIRE MESH REINFORCEMENT

SPECIFICATION REFERENCE

316

8" THICK CONTINUOUSLY REINFORCED CONC. PAVE.

(LEAVE OUT JOINT DETAIL)

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 4 OF 4

301.09