


PEDESTRIAN ACCESS ROUTE DETAIL


ADDITIONAL RIGHT-OF-WAY IS REQUIRED IF THE LIMITS OF PEDESTRIAN ACCESS ROUTE EXTEND BEYOND EXISTING OR PROPOSED VDOT RIGHT-OF-WAY.



SECTION F-F


PEDESTRIAN ACCESS ROUTES PROVIDE A CONTINUOUS UNOBSTRUCTED, STABLE, FIRM AND SLIP RESISTANT PATH CONNECTING ALL ACCESSIBLE ELEMENTS OF A FACILITY THAT CAN BE APPROACHED, ENTERED AND USED BY PEDESTRIANS.

\* IF PEDESTRIAN ACCESS ROUTES ARE BEING PROVIDED, A MINIMUM 4' TRAVERSABLE WIDTH IS REQUIRED WITH A MAX. 2% CROSS SLOPE.




SECTION E-E

WHEN USED IN CONJUNCTION WITH STANDARD CG-3 OR CG-7, THE CURB FACE ON THIS STANDARD IS TO BE ADJUSTED TO MATCH THE MOUNTABLE CURB CONFIGURATION.

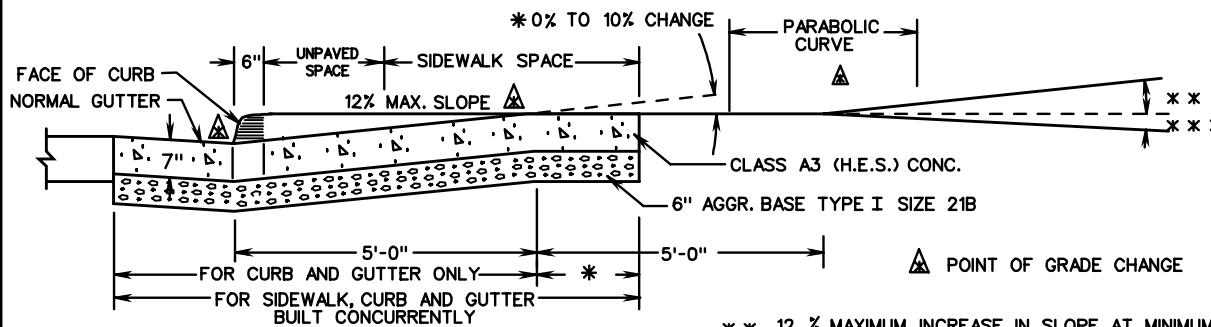

SECTION C-C

\*\* 12 % MAXIMUM INCREASE IN SLOPE AT MINIMUM 10' INTERVALS  
 \*\*\* 3 % MAXIMUM DECREASE IN SLOPE FOR FIRST 10' INTERVAL AND  
 8 % MAXIMUM DECREASE FOR SUCCEEDING MINIMUM 10' INTERVALS



SECTION D-D

SPECIFICATION REFERENCE

502

# STANDARD ENTRANCE GUTTER FOR USE WITH UNPAVED SPACE BETWEEN CURB & SIDEWALK

VIRGINIA DEPARTMENT OF TRANSPORTATION

REV. 2/06

203.02