


W - WIDTH OF PAVED SHOULDER \*

PLAN VIEW

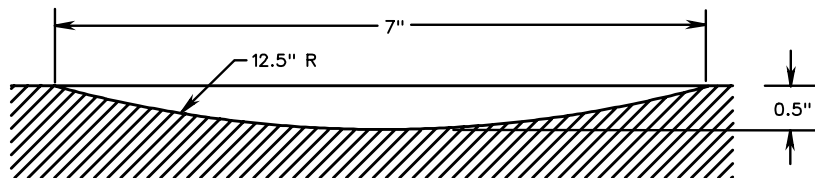

SECTION A-A

**NOTES**

RUMBLE STRIPS SHALL BE PLACED CONTINUOUSLY AS DIRECTED BY THE ENGINEER.

RUMBLE STRIPS SHALL NOT BE PLACED WITHIN LIMITS OF BRIDGE DRAINAGE APRONS OR SPECIAL DESIGN SHOULDER SLOT INLETS.

RUMBLE STRIPS SHALL BE PLACED ON MAINLINE SHOULDERS ONLY.

\* WHERE BICYCLES ARE NOT PROHIBITED, THE MINIMUM WIDTH OF THE OUTSIDE PAVED SHOULDER SHALL BE 8 FT.

REVISED 11/02

SPECIFICATION REFERENCE
310 315

# CONTINUOUS SHOULDER RUMBLE STRIPS

VIRGINIA DEPARTMENT OF TRANSPORTATION

REV 8/07  
304.01