

INSTALLATION AT PRIVATE ENTRANCE
(NOT TO BE USED IN PLACE OF ST'D GR-6,7, OR 9 NCHRP 350 TERMINAL)

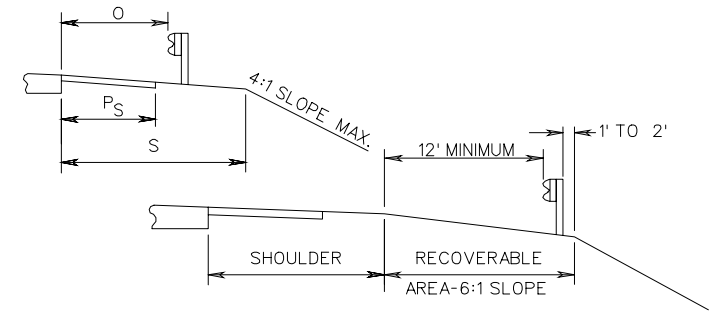
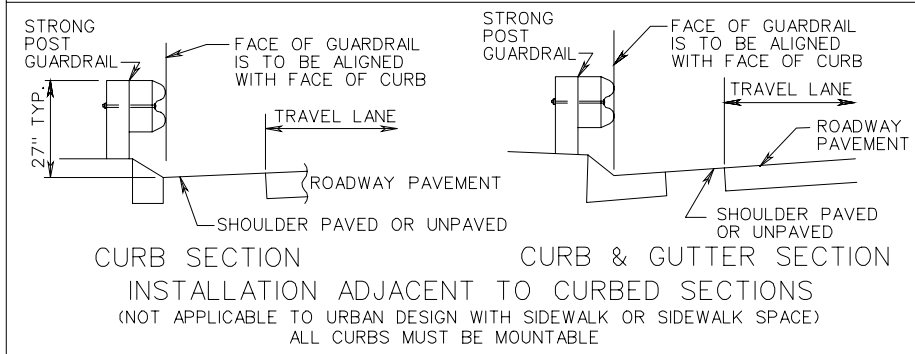


TABLE II
NORMAL GUARDRAIL LOCATION-THROUGH TRAFFIC LANES RIGHT OF TRAFFIC

SHOULDER WIDTH (S)	PAVED SHOULDER WIDTH (P _S)	OFFSET FROM EDGE OF PAVEMENT TO FACE OF GUARDRAIL (O)
15'	6', 10' or 12'	12'
13'	8'	10'
11'	0, 3', 4' or 6'	8'
9'	0, 3' or 4'	6'
7'	0 or 3'	4'
5'	0 or 3'	2'

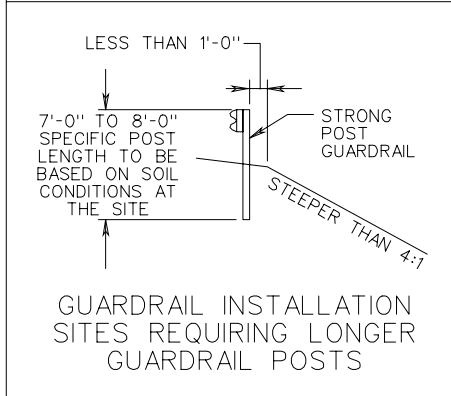


TABLE I
NORMAL GUARDRAIL LOCATION-THROUGH TRAFFIC LANES LEFT OF TRAFFIC

SHOULDER WIDTH (S)	PAVED SHOULDER WIDTH (P _S)	OFFSET FROM EDGE OF PAVEMENT TO FACE OF GUARDRAIL (O)
15'	3', 4', 10' or 12'	12'
13'	3'	10'
12' (MED. 6 LANE)	10'	10'
11'	3'	8'
8' (MED.)	3' or 4'	5'

GUARDRAIL LOCATION ON RECOVERABLE SLOPE

SPECIFICATION REFERENCE
221 505

W BEAM GUARDRAIL INSTALLATION CRITERIA