

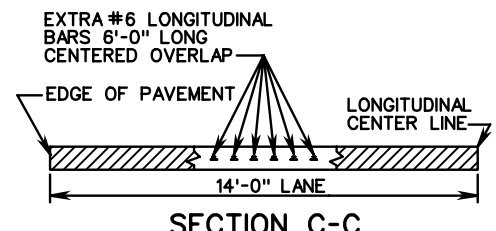


**PLAN VIEW
CONTINUOUSLY REINFORCED CONCRETE PAVEMENT**

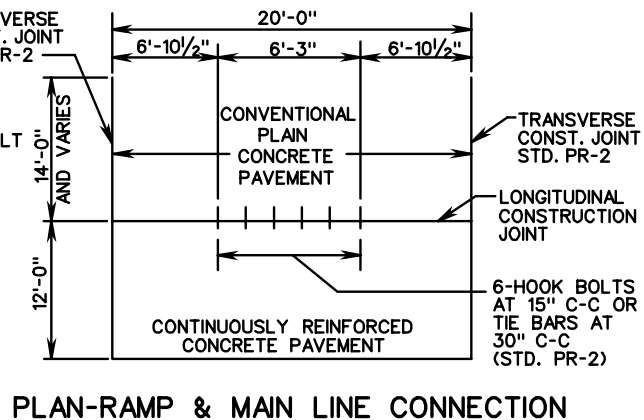

BARS TO BE SECURELY FASTENED TO PREVENT SEPARATION DURING CONCRETE PLACEMENT.

**TYPICAL
LONGITUDINAL LAP**

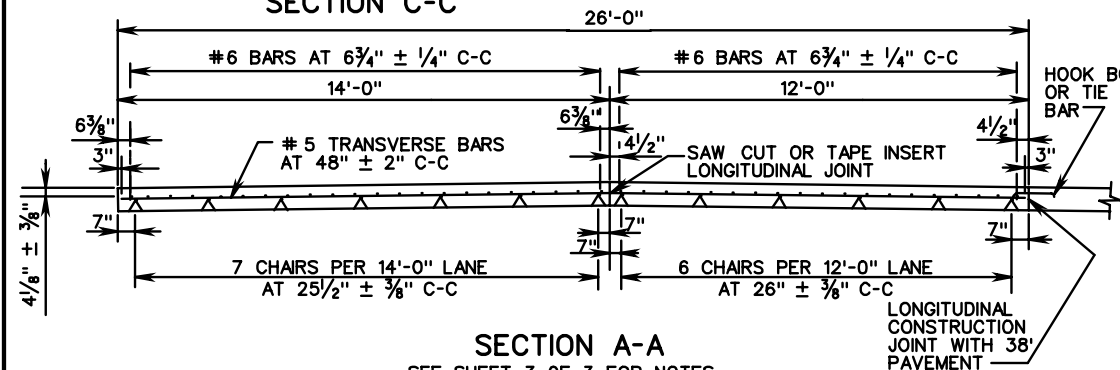

SPECIFICATION REFERENCE
316

9" THICK CONTINUOUSLY REINFORCED CONC. PAVE.
(14 FOOT TRAVEL LANE)

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT ROAD AND BRIDGE STANDARDS	
REVISION DATE	SHEET 1 OF 3
301.13	