

Warrants for Left Turn Storage Lanes on Four-Lane Highways

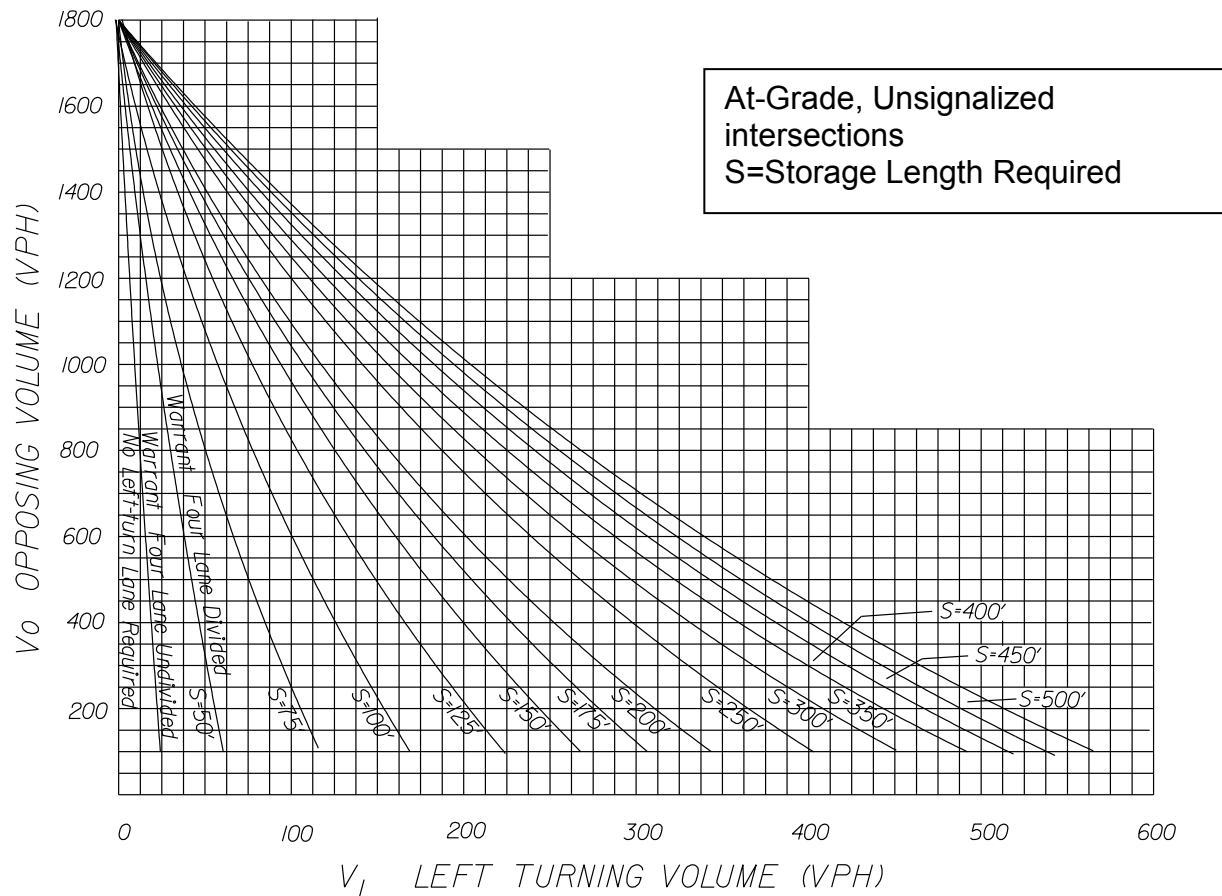


FIGURE 3-3 WARRANTS FOR LEFT TURN STORAGE LANES ON FOUR-LANE HIGHWAYS

Figure 3-3 was derived from Highway Research Report No. 211.

Opposing volume and left turning volume in vehicles per hour (VPH) are used for left turn storage lane warrants on four-lane highways.

For plan detail requirements when curb and/or gutter are used, see VDOT’s Road Design Manual, Section 2E-3 on the VDOT web site: <http://www.virginiaidot.org/business/locdes/rdmanual-index.asp>.

Left-turn lanes shall* also be established on two-lane highways where traffic volumes are high enough to warrant them.

* Rev. 1/15