


* LONGITUDINAL STEEL TO CONTINUE THROUGH JOINT.

LEAVE OUT JOINT
FOR USE WITH STEEL BAR REINFORCEMENT

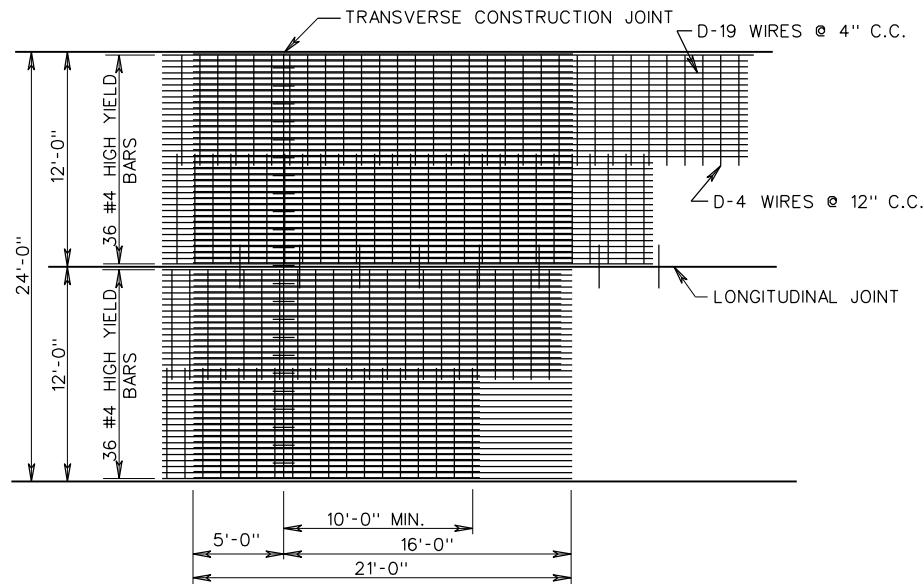

LEAVE OUT JOINT
FOR USE WITH WIRE MESH REINFORCEMENT

SPECIFICATION
REFERENCE

316

A COPY OF THE ORIGINAL SEALED AND SIGNED DRAWING IS ON FILE IN THE CENTRAL OFFICE.

8" THICK CONTINUOUSLY REINFORCED CONC. PAVE.
(LEAVE OUT JOINT DETAIL)

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

7/12

SHEET 4 OF 4

301.09