


W - WIDTH OF PAVED SHOULDER

PLAN VIEW

NOTES

1. RUMBLE STRIPES SHALL BE PLACED CONTINUOUSLY AS DIRECTED BY THE ENGINEER.
2. RUMBLE STRIPES SHALL NOT BE PLACED WITHIN LIMITS OF BRIDGE DRAINAGE APRONS OR SPECIAL DESIGN SHOULDER SLOT INLETS.
3. RUMBLE STRIPES SHALL BE PLACED ON MAINLINE SHOULDERS ONLY.
4. FOLLOWING CUTTING AND CLEANING DEPRESSIONS OF WASTE MATERIAL IN ASPHALT CONCRETE PAVEMENT THAT IS BEEN IN PLACE MORE THAN ONE YEAR, THE ENTIRE RUMBLE STRIP AREA SHALL BE COATED WITH LIQUID ASPHALT COATING (EMULSION) USING A PRESSURE DISTRIBUTOR AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQUARE YARD. OVERSPRAY SHALL NOT EXTEND MORE THAN 2 INCHES BEYOND THE WIDTH OF CUT AND/OR SHALL NOT COME IN CONTACT WITH PAVEMENT MARKINGS.
5. RUMBLE STRIPES SHALL NOT BE PLACED WITHIN 50 FEET OF ANY INTERSECTION, TURN LANE, ACCELERATION/DECELERATION LANE OR GORE AREA.
6. PAVEMENT MARKINGS SHALL BE PLACED AS DIRECTED BY THE ENGINEER.

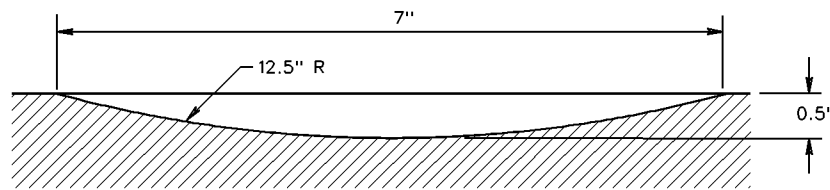

SECTION A-A

SPECIFICATION REFERENCE

310  
315

A COPY OF THE ORIGINAL SEALED AND SIGNED STANDARD DRAWING IS ON FILE IN THE CENTRAL OFFICE  
**CONTINUOUS SHOULDER RUMBLE STRIPES**

VIRGINIA DEPARTMENT OF TRANSPORTATION

**VDOT**

ROAD AND BRIDGE STANDARDS

REVISION DATE

08/10

SHEET 1 OF 1

304.03