



TYPICAL DESIGN

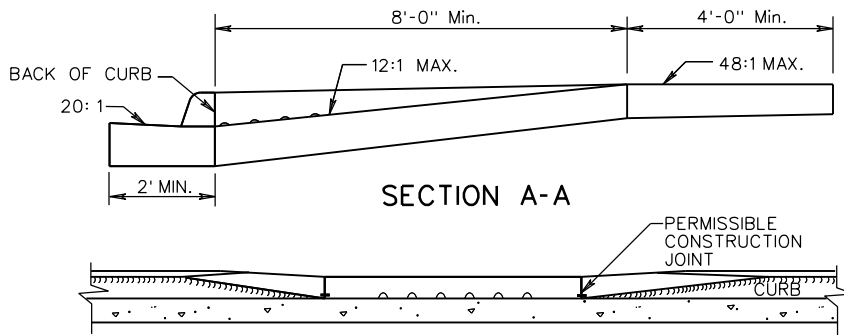

SECTION A-A


SECTION B-B

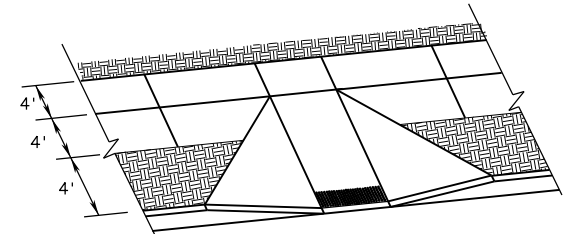


TYPE A WITH BUFFER STRIP

NOTES:
FOR GENERAL NOTES ON THE DETECTABLE WARNING SURFACE, SEE SHEET 1 OF 5.

THIS DESIGN TO BE USED FOR CONSTRUCTION THAT INCORPORATES WIDER SIDEWALK. LANDING (4' WIDE) REQUIRED AT TOP OF CURB RAMP. MINIMUM CURB RAMP LENGTH 8 FEET FOR NEW CONSTRUCTION.




TYPICAL PLACEMENT AT INTERSECTION WITHIN CROSSWALK




TYPICAL PLACEMENT AT INTERSECTION WITHIN CROSSWALK (WITH BUFFER STRIP)

A 4' SQUARE LANDING AREA OUTSIDE OF TRAVELWAY SHALL BE PROVIDED WITHIN THE MARKED CROSSWALK AREA.



DIAGONAL PLACEMENT

A 4' SQUARE LANDING AREA OUTSIDE OF TRAVELWAY SHALL BE PROVIDED WITHIN THE MARKED CROSSWALK AREA.



DIAGONAL PLACEMENT WITH BUFFER STRIP

SPECIFICATION REFERENCE

105
502

CG-12 DETECTABLE WARNING SURFACE
TYPE A (PERPENDICULAR) APPLICATION

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

07/15

SHEET 2 OF 5

203.06