

PLAN VIEW


NOTES

RUMBLE STRIPS SHALL BE PLACED CONTINUOUSLY AS DIRECTED BY THE ENGINEER.

RUMBLE STRIPS SHALL NOT BE PLACED WITHIN LIMITS OF BRIDGE DRAINAGE APRONS OR SPECIAL DESIGN SHOULDER SLOT INLETS.

RUMBLE STRIPS SHALL BE PLACED ON MAINLINE SHOULDERS ONLY.

\* WHERE BICYCLES ARE NOT PROHIBITED, THE MINIMUM WIDTH OF THE OUTSIDE PAVED SHOULDER SHALL BE 8 FT.

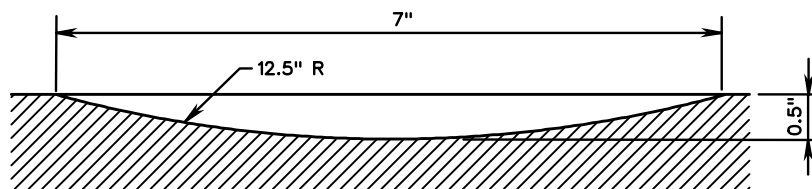

SECTION A-A

SPECIFICATION REFERENCE

310  
315

CONTINUOUS SHOULDER RUMBLE STRIPS

VIRGINIA DEPARTMENT OF TRANSPORTATION

VDOT

ROAD AND BRIDGE STANDARDS

REVISION DATE

SHEET 1 OF 1

304.01