



HALF - PLAN

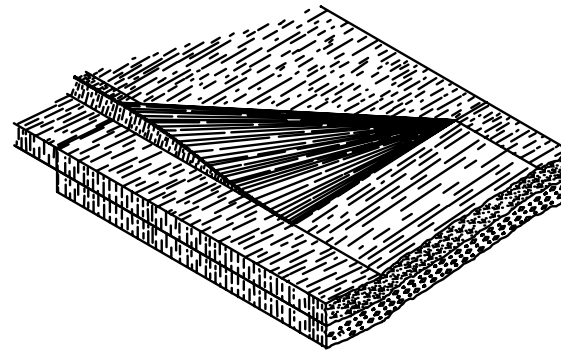

ISOMETRIC VIEW

WHEN USED IN CONJUNCTION WITH STANDARD CG-3 OR CG-7, THE CURB FACE ON THIS STANDARD IS TO BE ADJUSTED TO MATCH THE MOUNTABLE CURB CONFIGURATION.

- \*\* 12 % MAXIMUM INCREASE IN SLOPE AT MINIMUM 10' INTERVALS
- \*\*\* 3 % MAXIMUM DECREASE IN SLOPE FOR FIRST 10' INTERVAL AND 8 % MAXIMUM DECREASE FOR SUCCEEDING MINIMUM 10' INTERVALS

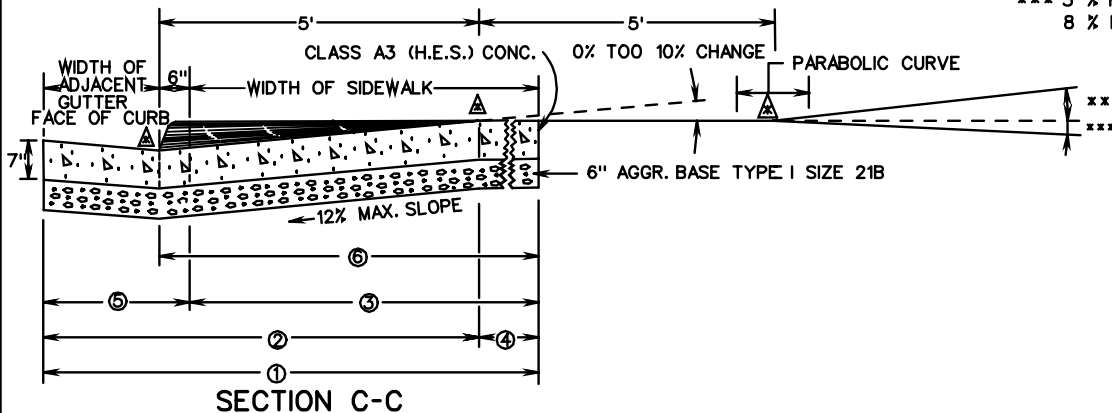

SECTION C-C

- ① FOR SIDEWALK, CURB AND GUTTER - BUILT CONCURRENTLY.
- ② FOR INITIAL CURB AND GUTTER ONLY.
- ③ FOR INITIAL SIDEWALK ONLY - 7" SIDEWALK TO BE DIPPED.
- ④ FOR SIDEWALK ONLY - AFTER INITIAL CURB AND GUTTER.
- ⑤ FOR CURB AND GUTTER ONLY - AFTER INITIAL SIDEWALK.
- ⑥ FOR CURB AND SIDEWALK ONLY - WITHOUT GUTTER.
- ▲ INDICATES POINT OF GRADE CHANGE.

## STANDARD ENTRANCE GUTTER WITH FLARED OPENING FOR USE ACROSS SIDEWALK

SPECIFICATION REFERENCE

502