


Where design speed is greater than 40 MPH on Rural Highways and 45 MPH in developed Urban and Suburban areas, median curb is to be in accordance with Standard CG-3.

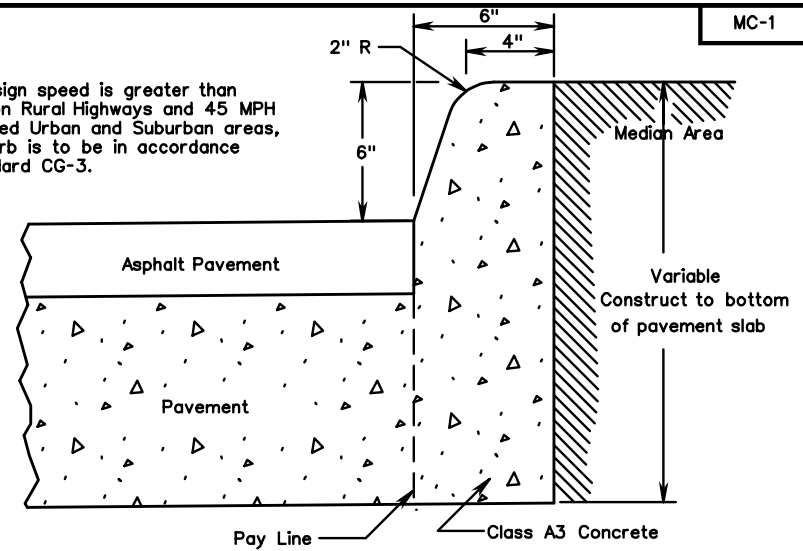


FOR USE WITH CONCRETE PAVEMENT


FOR USE WITH CONCRETE WITH ASPHALT TOP COURSE

INTEGRAL

The depth of curb may be reduced as much as 3" (15" depth) or increased as much as 3" (21" depth) in order that the bottom of curb will coincide with the top of a course of the pavement substructure. Otherwise the depth is to be 18" as shown. No adjustment in the price bid is to be made for a decrease or an increase in depth.

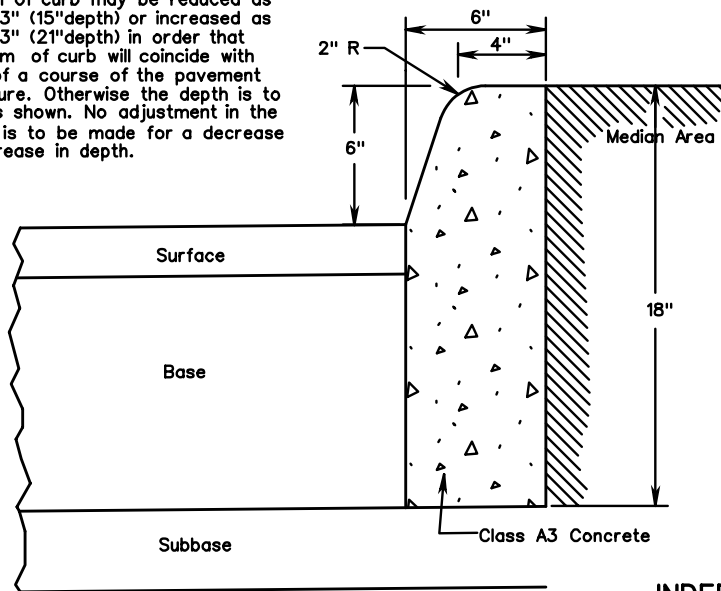

The depth of curb may be reduced as much as 3" (15" depth) or increased as much as 3" (21" depth) in order that the bottom of curb will coincide with the top of a course of the pavement substructure. Otherwise the depth is to be 18" as shown. No adjustment in the price bid is to be made for a decrease or an increase in depth.

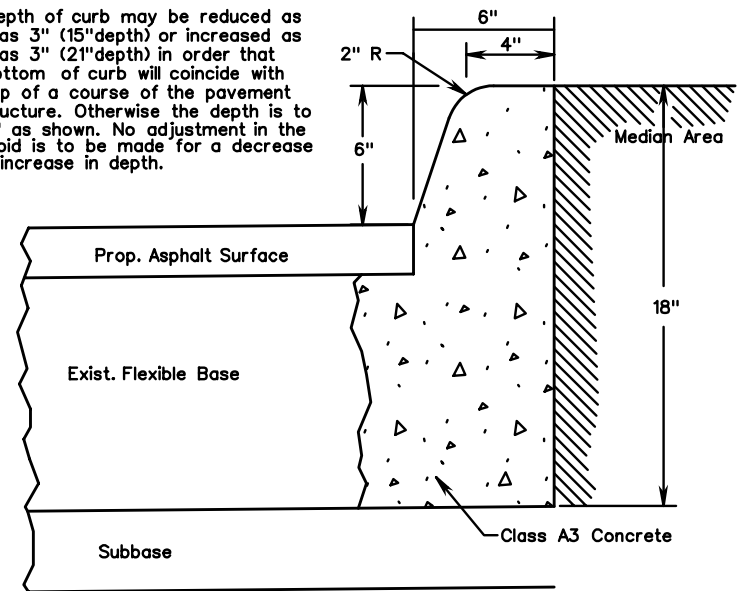

INDEPENDENT

| |
|-------------------------|
| SPECIFICATION REFERENCE |
| 502 |

CONCRETE MEDIAN CURB

VIRGINIA DEPARTMENT OF TRANSPORTATION