
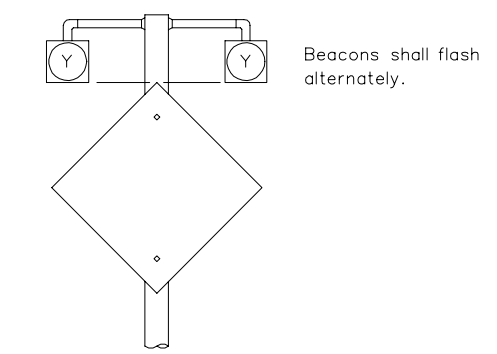


Notes:

- All signal lenses shall be 12".
- Post to be drilled for breakaway and installed in accordance with WSP-1, pages 1301.57 & 1301.58.
- All elbows and condulets shall have set screws or lock nuts to prevent rotation.
- Miscellaneous hardware shall be stainless steel.
- Channelling shall be galvanized steel.
- A water proof sealant shall be utilized between the elbow & signal head.

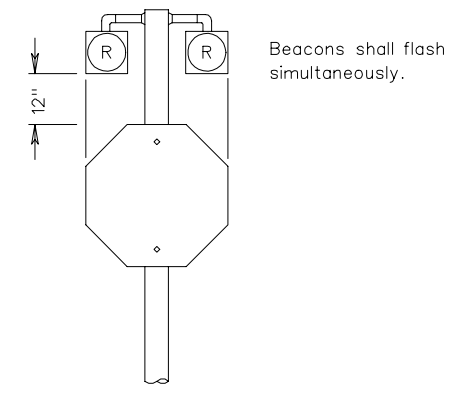

BEACON ALIGNMENT
DETAIL

FLASHING BEACON INSTALLATION DETAILS