


PEDESTRIAN ACCESS ROUTE DETAIL


ADDITIONAL RIGHT-OF-WAY IS REQUIRED IF THE LIMITS OF PEDESTRIAN ACCESS ROUTE \boxtimes EXTEND BEYOND EXISTING OR PROPOSED VDOT RIGHT-OF-WAY.

\boxtimes PEDESTRIAN ACCESS ROUTES PROVIDE A CONTINUOUS UNOBSTRUCTED, STABLE, FIRM AND SLIP RESISTANT PATH CONNECTING ALL ACCESSIBLE ELEMENTS OF A FACILITY THAT CAN BE APPROACHED, ENTERED AND USED BY PEDESTRIANS.


* IF PEDESTRIAN ACCESS ROUTES \boxtimes ARE BEING PROVIDED, A MINIMUM 4' TRAVERSABLE WIDTH IS REQUIRED WITH A MAX. 2% CROSS SLOPE.




SECTION F-F



SECTION E-E



SECTION D-D

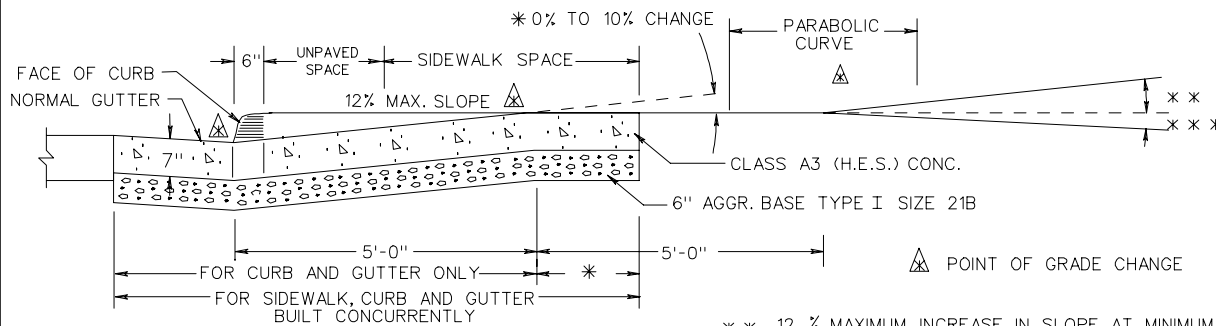

SECTION C-C

* * 12 % MAXIMUM INCREASE IN SLOPE AT MINIMUM 10' INTERVALS
 * * * 3 % MAXIMUM DECREASE IN SLOPE FOR FIRST 10' INTERVAL AND
 8 % MAXIMUM DECREASE FOR SUCCEEDING MINIMUM 10' INTERVALS

| |
|-------------------------|
| SPECIFICATION REFERENCE |
| 502 |

STANDARD ENTRANCE GUTTER FOR USE WITH UNPAVED SPACE BETWEEN CURB & SIDEWALK

VIRGINIA DEPARTMENT OF TRANSPORTATION

REV. 2/06
203.02