





TC-5.01

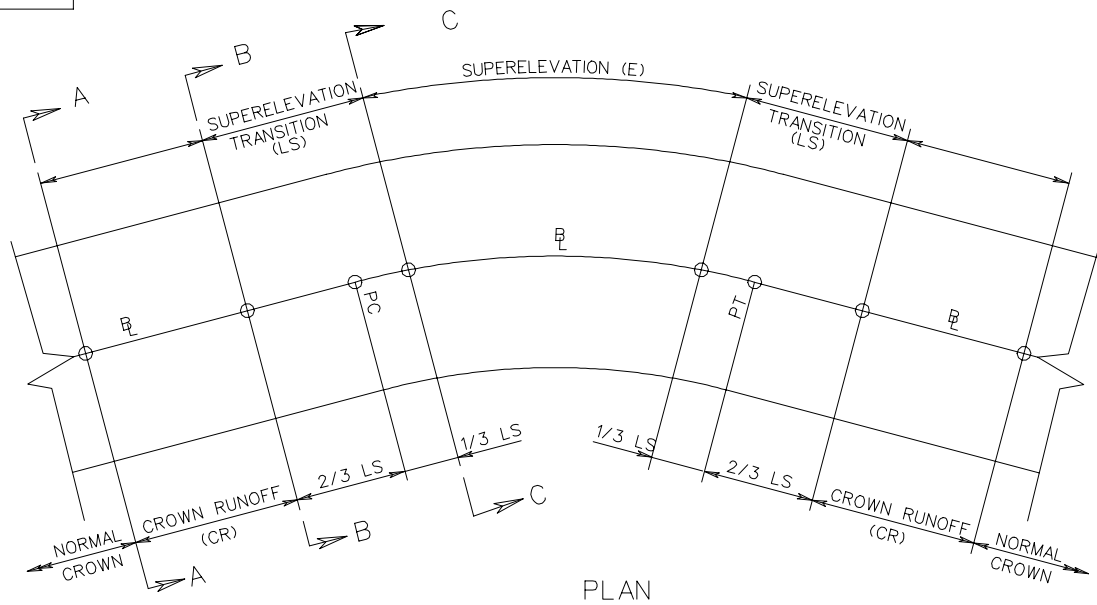

SECTION A-A  
NORMAL CROWN




SECTION B-B  
NORMAL CROWN  
REMOVED (FLAT)




SECTION C-C  
FULL SUPERELEVATION

$C = (W/2)(NPC/100)$

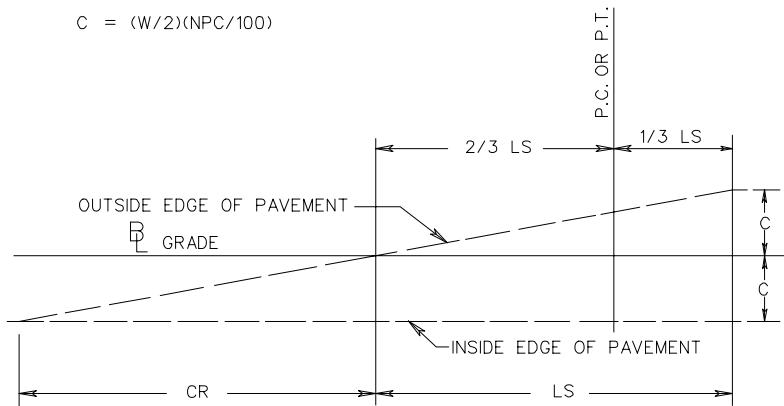

SUPERELEVATED BY AN AMOUNT EQUAL TO THE  
STANDARD PAVEMENT CROWN

$C = (W/2)(NPC/100)$   
 $S = (W/2)(E/100)$

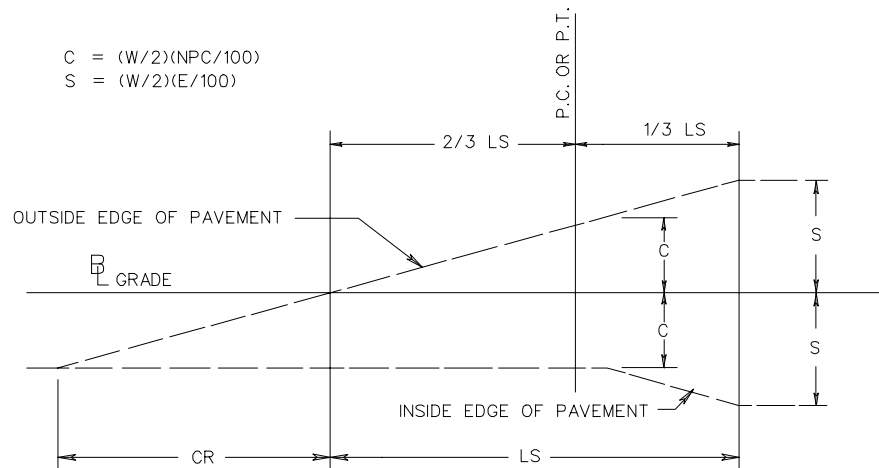

NOTE : ON THE INSIDE OF CURVE THE STANDARD PAVEMENT  
CROWN (C) SHALL BE HELD UNTIL IT IS EXCEEDED BY THE  
TABULATED RATE OF SUPERELEVATION (E).

SUPERELEVATED BY AN AMOUNT EXCEEDING THE  
STANDARD PAVEMENT CROWN

DETAILS FOR NON-TRANSITION  $\mathbb{E}$   
URBAN CONDITIONS AND RURAL CONDITIONS WITHOUT PAVEMENT WIDENING

802.06