


HALF PLAN

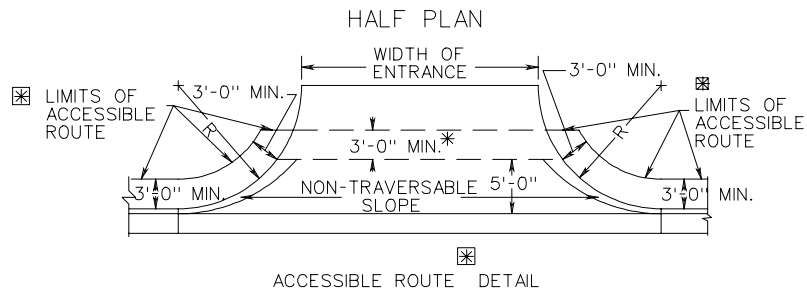


ADDITIONAL RIGHT-OF-WAY IS REQUIRED IF THE LIMITS OF ACCESSIBLE ROUTE \boxtimes EXTEND BEYOND EXISTING OR PROPOSED VDOT RIGHT-OF WAY.


DETAIL TO BE USED WHEN THE COMBINED WIDTH OF UNPAVED SPACE AND SIDEWALK SPACE IS LESS THAN 7'.

\boxtimes ACCESSIBLE ROUTES A CONTINUOUS UNOBSTRUCTED, STABLE, FIRM AND SLIP RESISTANT PATH CONNECTING ALL ACCESSIBLE ELEMENTS OF A FACILITY THAT CAN BE APPROACHED, ENTERED AND USED BY PEDESTRIANS.

* IF ACCESSIBLE ROUTES ARE BEING PROVIDED, A MINIMUM 3' TRAVERSABLE WIDTH IS REQUIRED WITH A MAX. 2% CROSS SLOPE.




SECTION B-B

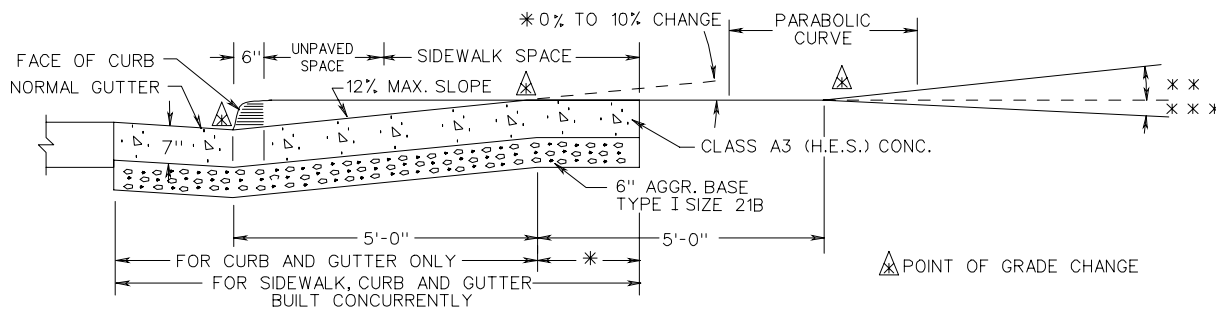


SECTION A-A

** 12 % MAXIMUM INCREASE IN SLOPE AT MINIMUM 10' INTERVALS
 *** 3 % MAXIMUM DECREASE IN SLOPE FOR FIRST 10' INTERVAL AND
 8 % MAXIMUM DECREASE FOR SUCCEEDING MINIMUM 10' INTERVALS

WHEN USED IN CONJUNCTION WITH STANDARD CG-3 OR CG-7, THE CURB FACE ON THIS STANDARD IS TO BE ADJUSTED TO MATCH THE MOUNTABLE CURB CONFIGURATION.



SECTION C-C



SECTION D-D

STANDARD ENTRANCE GUTTER

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

502