
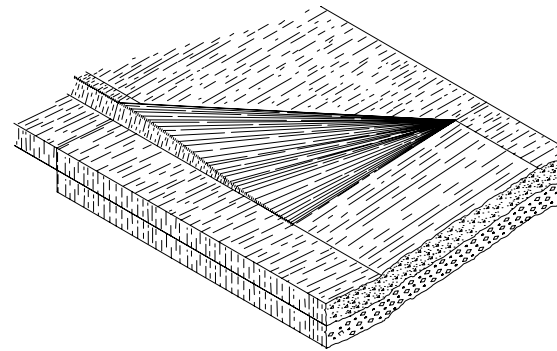



CG-9A

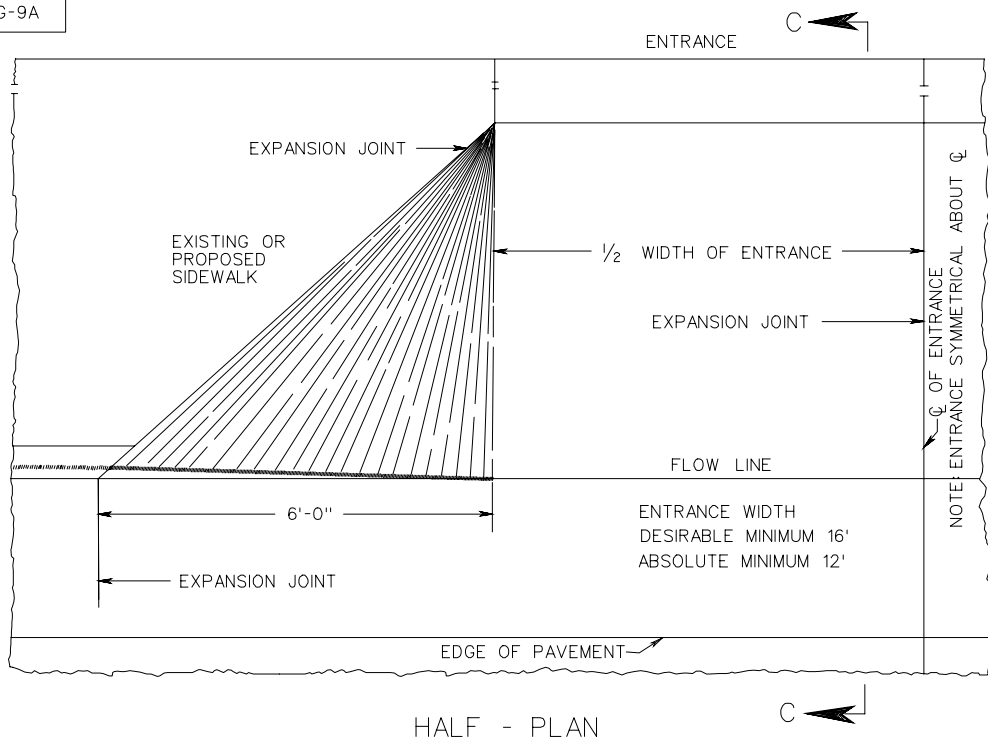

ISOMETRIC VIEW

WHEN USED IN CONJUNCTION WITH STANDARD CG-3 OR CG-7, THE CURB FACE ON THIS STANDARD IS TO BE ADJUSTED TO MATCH THE MOUNTABLE CURB CONFIGURATION.

- \*\* 12 % MAXIMUM INCREASE IN SLOPE AT MINIMUM 10' INTERVALS
- \*\*\* 3 % MAXIMUM DECREASE IN SLOPE FOR FIRST 10' INTERVAL AND 8 % MAXIMUM DECREASE FOR SUCCEEDING MINIMUM 10' INTERVALS

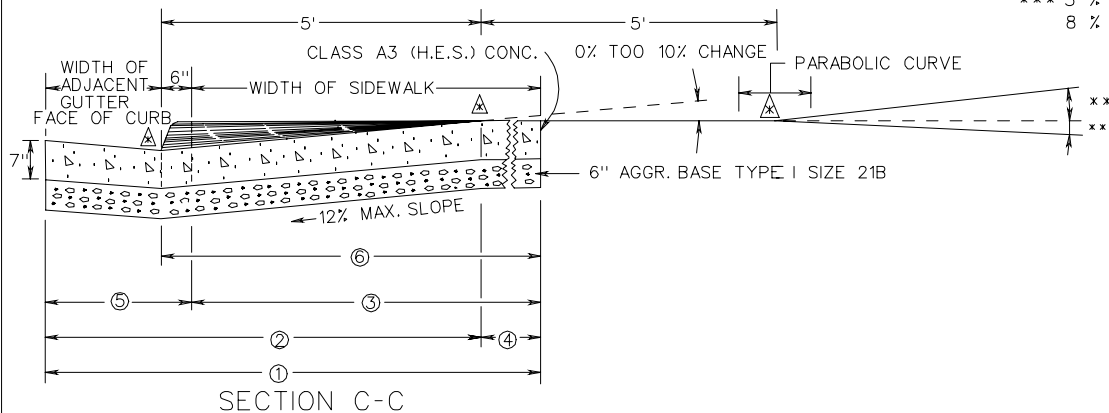

- ① FOR SIDEWALK, CURB AND GUTTER - BUILT CONCURRENTLY.
  - ② FOR INITIAL CURB AND GUTTER ONLY.
  - ③ FOR INITIAL SIDEWALK ONLY - 7" SIDEWALK TO BE DIPPED.
  - ④ FOR SIDEWALK ONLY - AFTER INITIAL CURB AND GUTTER.
  - ⑤ FOR CURB AND GUTTER ONLY - AFTER INITIAL SIDEWALK.
  - ⑥ FOR CURB AND SIDEWALK ONLY - WITHOUT GUTTER.
- ▲ INDICATES POINT OF GRADE CHANGE.

STANDARD ENTRANCE GUTTER WITH FLARED OPENING FOR USE ACROSS SIDEWALK

SPECIFICATION REFERENCE

502

203.01