

REVISED ON 7/04

FE-W1,W2	CORNER BRACE	LINE BRACE	LINE BRACE AT END LOCATION	
WOOD POST			<p>THE BRACE WIRE TO BE PLACED AROUND POSTS WITH ONE WIRE ON EACH SIDE OF BRACE. WIRE TO BE DRAWN TAUT BY TWISTING BETWEEN BRACE AND EACH POST. THIS APPLIES TO ALL BRACE WIRES.</p> <p>DIAGONAL 4" BRACES TO BE PLACED IN DIRECTION OF PULL. POST TO BE NOTCHED FOR DIAGONAL 4" BRACES. ALL 4" DIAGONAL BRACES TO HAVE TWO GALVANIZED 12D NAILS AT EACH END.</p>	
METAL POST	<p>* L2½X2½X¼ POST WITH 2X2X¾X7'-0" BRACES OR 2½" O.D. POST @ 3.65 ± 5% LBS./FT. WITH 1½" O.D. BRACES @ 2.27 ± 5% LBS./FT.</p>	<p>IF NOT OTHERWISE NOTED DIMENSIONS AND DESCRIPTIONS SHOWN ON ONE DRAWING APPLY TO OTHER DETAILS WITH THE SAME POST TYPE.</p>		
<p>NOTES:</p> <p>SEE GENERAL NOTES-FENCING FOR ADDITIONAL DETAILS AND INSTRUCTIONS.</p>	<p>LINE POSTS ARE TO BE OF THE TYPES SHOWN OR EQUIVALENT MEETING THE APPROVAL OF THE ENGINEER.</p> <p>ALL POSTS ARE TO HAVE A MINIMUM WEIGHT OF 1.25 LBS./FT.</p> <p>A MINIMUM OF FIVE CLAMPS FOR ATTACHING FABRIC TO POST ARE TO BE INCLUDED IN COST OF EACH LINE POST.</p> <p>FLANGED "U" TYPE      "T" TYPE</p> <p>METAL LINE POST</p>	<p>FOR USE IN LIEU OF SETTING POSTS IN CONCRETE. DEVICES SHOWN ARE REPRESENTATIONAL ONLY. SEE GENERAL NOTES.</p> <p>ALTERNATE ANCHOR DEVICES</p>	<p>L2X2X¾ TO BE CUT TO FIT AROUND L2½X2½X¼ STRETCHER POST.</p> <p>L2½X2½X¼, 2" LONG BRACKET BOLTED TO STRETCHER POST.</p> <p>METHOD OF ATTACHING ANGLE BRACES TO STRETCHER POSTS</p>	
502.02	<p>STANDARD FENCE WOVEN WIRE FABRIC VIRGINIA DEPARTMENT OF TRANSPORTATION</p>			<p>SPECIFICATION REFERENCE</p> <p>242 507 236</p>


REVISED ON 7/04

		CORNER BRACE	LINE BRACE	LINE BRACE AT END LOCATION	FE-B
WOOD POST					
					<p>DIAGONAL 4" BRACE TO BE PLACED IN DIRECTION OF PULL.</p> <p>POST TO BE NOTCHED FOR DIAGONAL 4" BRACES. ALL DIAGONAL 4" BRACES TO HAVE TWO GALVANIZED 12D NAILS AT EACH END.</p>
METAL POST	<p>* L2 1/2 X 2 1/2 X 1/4 POST WITH L2 X 2 X 3/8 X 7'-0" BRACES OR 2 1/2" O.D. POST @ 3.65 ± 5% LBS./FT. WITH 1 5/8" O.D. BRACES @ 2.27 ± 5% LBS./FT.</p>			<p>IF NOT OTHERWISE NOTED DIMENSIONS AND DESCRIPTIONS SHOWN ON ONE DRAWING APPLY TO OTHER DETAILS WITH THE SAME POST TYPE.</p>	
					<p>NOTES: SEE GENERAL NOTES-FENCING FOR ADDITIONAL DETAILS AND INSTRUCTIONS.</p> <p>LINE POSTS ARE TO BE OF THE TYPES SHOWN OR EQUIVALENT MEETING THE APPROVAL OF THE ENGINEER.</p> <p>ALL POSTS ARE TO HAVE A MINIMUM WEIGHT OF 1.25 LBS./FT.</p> <p>A MINIMUM OF FIVE CLAMPS FOR ATTACHING FABRIC TO POST ARE TO BE INCLUDED IN COST OF EACH LINE POST.</p>
	<p>FLANGED "U" TYPE</p> <p>"T" TYPE</p> <p>METAL LINE POST</p>	<p>ALTERNATE</p> <p>METHOD OF ATTACHING ANGLE BRACES TO STRETCHER POSTS</p>	<p>ALTERNATE ANCHOR DEVICES</p>		
SPECIFICATION REFERENCE	<p>STANDARD FENCE BARBED WIRE</p> <p>VIRGINIA DEPARTMENT OF TRANSPORTATION</p>				
242					
507					
236					502.03

REVISED ON 7/03

REVISED ON 1/04

REVISED ON 7/04

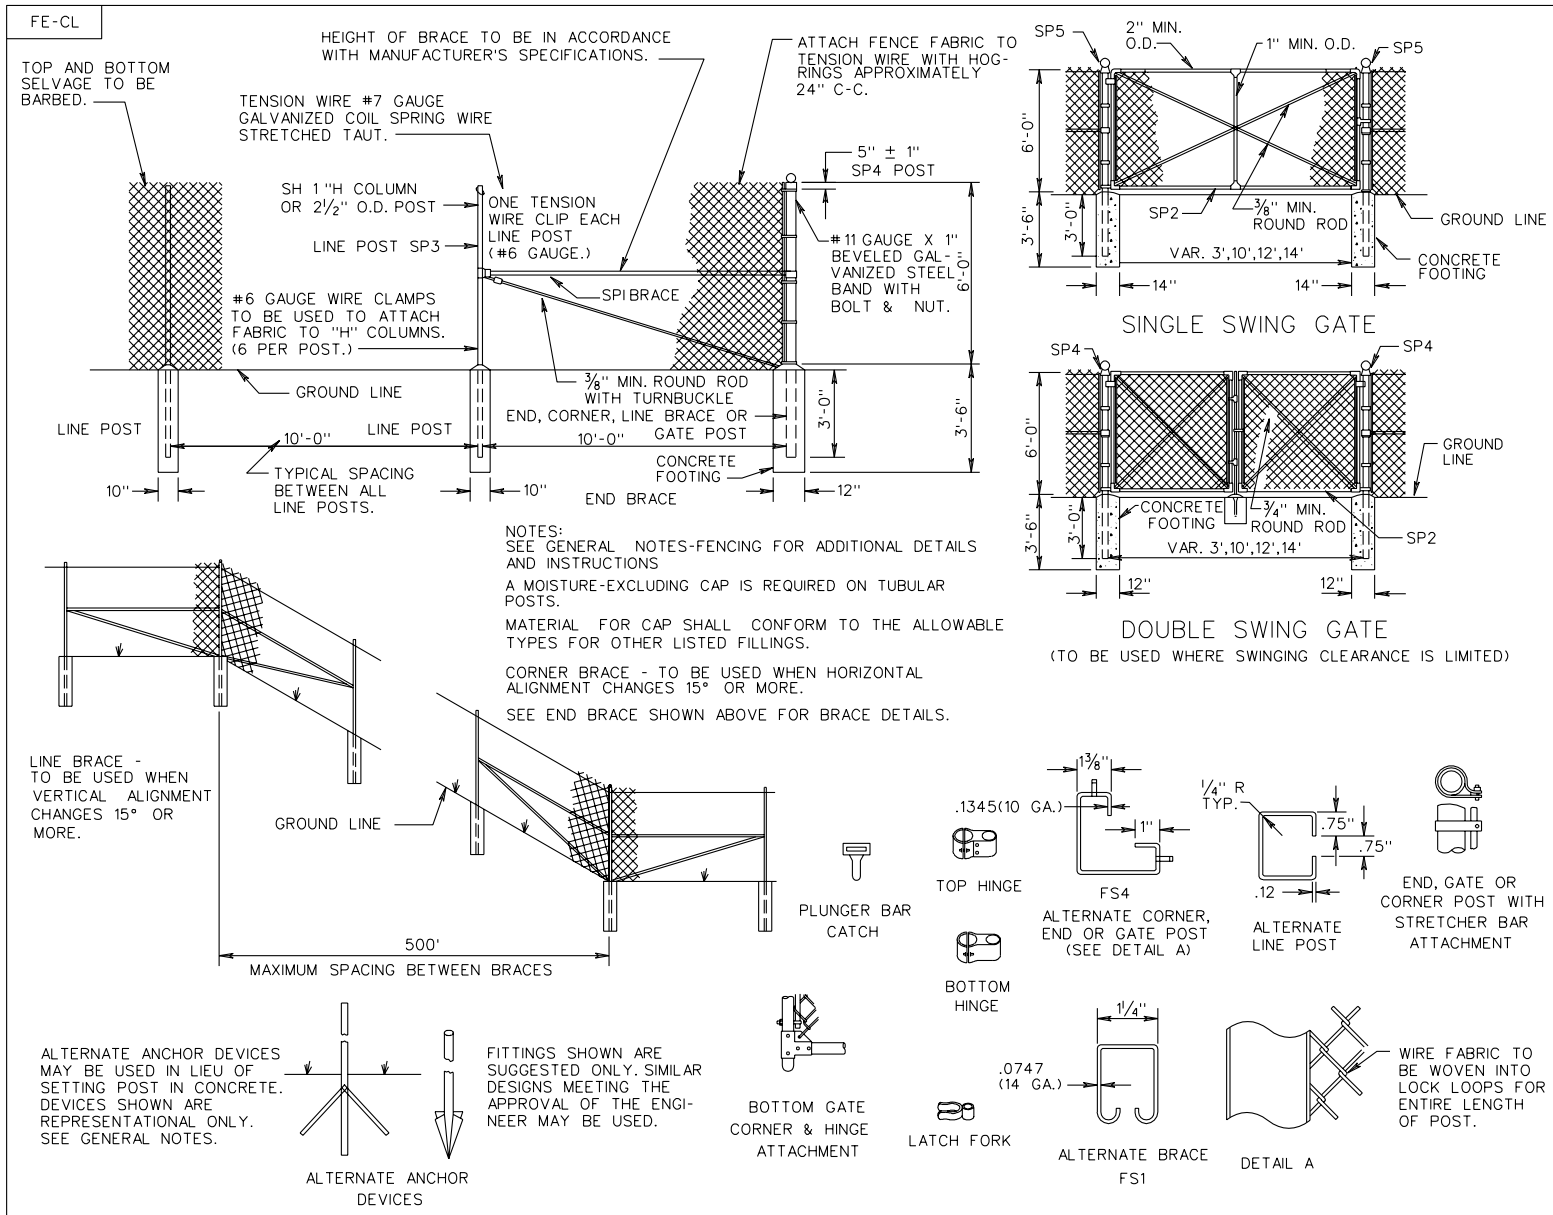

# STANDARD FENCE CHAIN LINK

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

242  
507

502.04