


**Perpendicular or Angled Parking Spaces (R309.3)**

Where perpendicular or angled parking is provided, an<sup>\*</sup> access aisle (8.0 ft) wide minimum shall be provided at street level the full length of the parking space and shall connect to a pedestrian access route serving the space. The Access aisle shall be marked so as to discourage parking in the access aisle. Two parking spaces are permitted to share a common access aisle. See Figures C-1-3 and C-1-4.

Advisory R309.3 Perpendicular or Angled Parking Spaces. Perpendicular and angled parking spaces permit the deployment of a van side-lift or ramp.

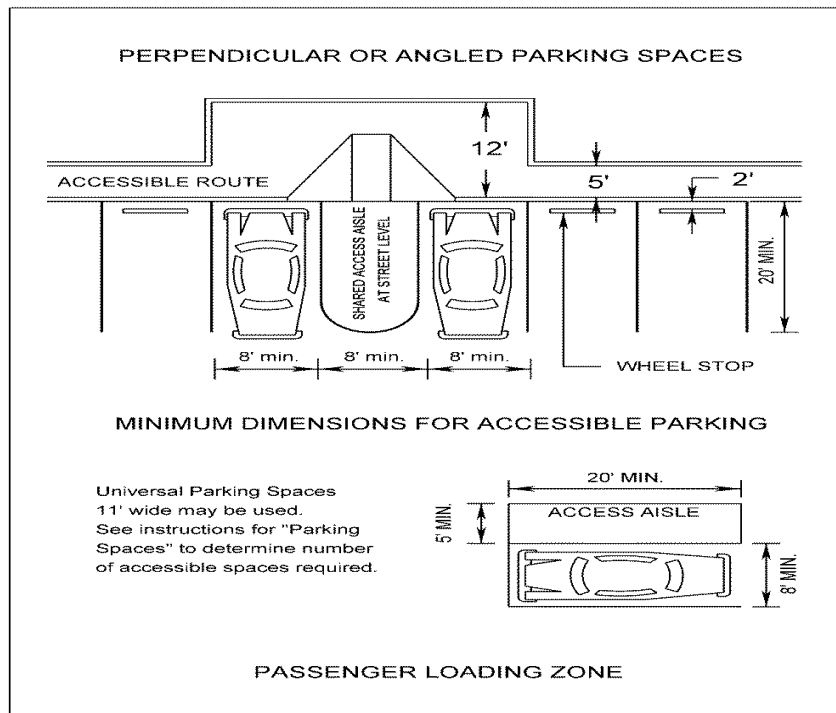

**PASSENGER LOADING ZONES:** Passenger loading zones shall provide a vehicular pull-up space 8 feet wide minimum and 20 feet long minimum. The access aisle serving the vehicle pull-up space shall be 5 feet wide minimum and adjoin a pedestrian route and shall not overlap the vehicular way. Access aisles shall be marked so as to discourage parking in them.

**FIGURE C-1-3 PERPENDICULAR OR ANGLED ACCESSIBLE PARKING SPACES AND LOADING ZONES**

<sup>\*</sup> Rev. 1/15