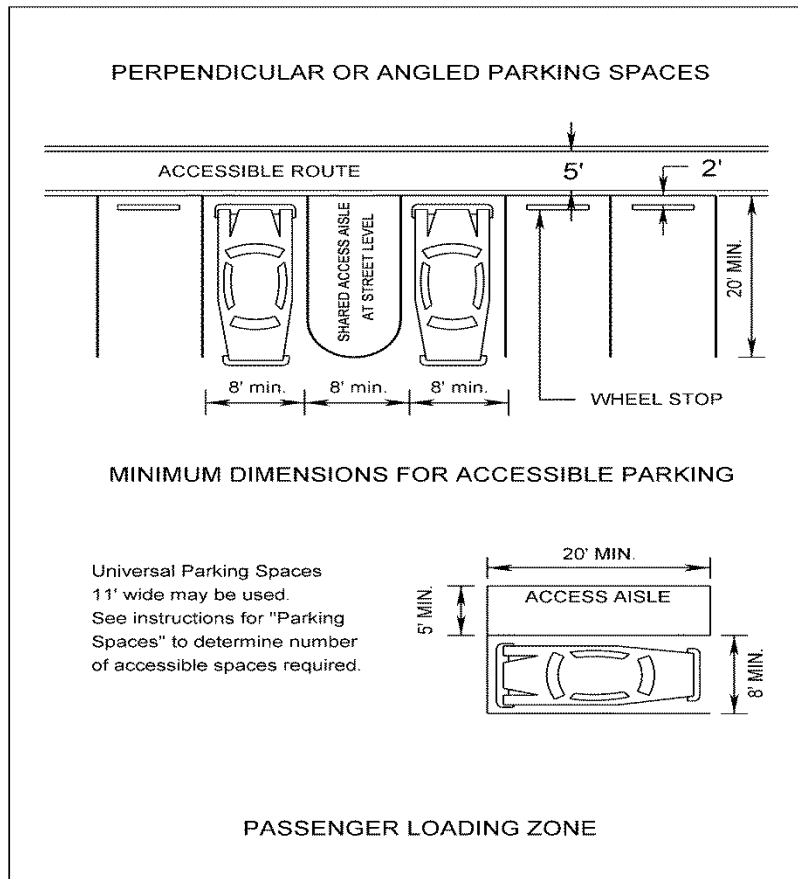


## ACCESSIBLE PARKING AND PASSENGER LOADING ZONES



**FIGURE C-1-3 ACCESSIBLE PARKING AND LOADING ZONES\***

Source: The most recent Americans with Disabilities Act Accessibility Guidelines (ADAAG).

**PASSENGER LOADING ZONES:** Passenger loading zones shall provide a vehicular pull-up space 8 feet wide minimum and 20 feet long minimum. The access aisle serving the vehicle pull-up space shall be 5 feet wide minimum and adjoin a pedestrian route and shall not overlap the vehicular way. Access aisles shall be marked so as to discourage parking in them.

### NOTES:

**LOCATION:** Parking spaces for persons with mobility impairments and accessible passenger loading zones that serve a particular building shall be located on the shortest possible accessible circulation route to an accessible entrance of the building. In separate parking structures or lots that do not serve a particular building, accessible parking spaces shall be located on the shortest possible circulation route to an accessible pedestrian entrance of the parking facility.

\* Rev. 7/12