

8/27/2014
8:48:36 AM



Typical Section Idgn
Plotted By: stewart@illinois

PROJECT MANAGER _____
SURVEYED BY, DATE _____
DESIGNED BY _____
SUBSURFACE UTILITY BY, DATE _____


TYPICAL SECTION SHEET

DESIGN FEATURES RELATING TO CONSTRUCTION OR TO REGULATION AND CONTROL OF TRAFFIC MAY BE SUBJECT TO CHANGE AS DEEMED NECESSARY BY THE DEPARTMENT

REVISED	STATE	FEDERAL AID PROJECT	ROUTE	STATE PROJECT	SHEET NO.
	VA.		XXX	XXXX-XXX-XXX, R-20X C-50X	2A

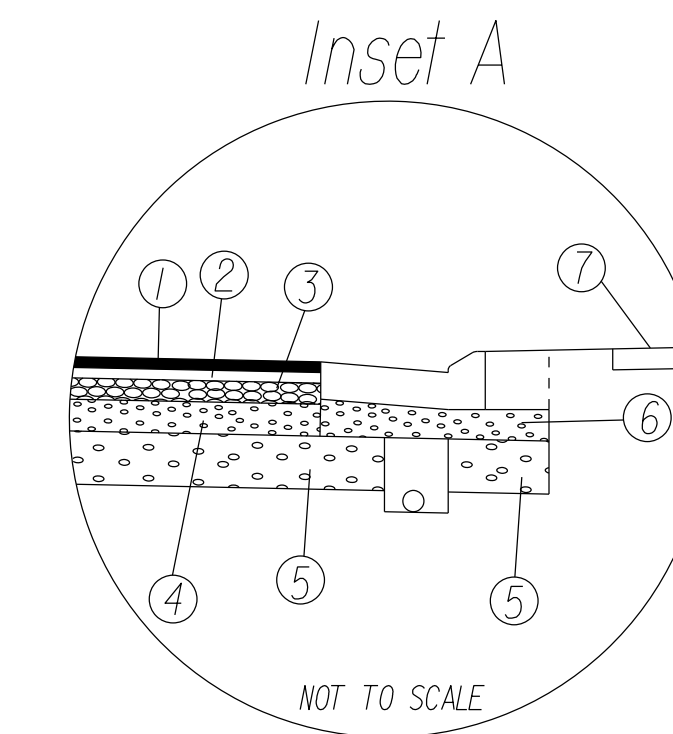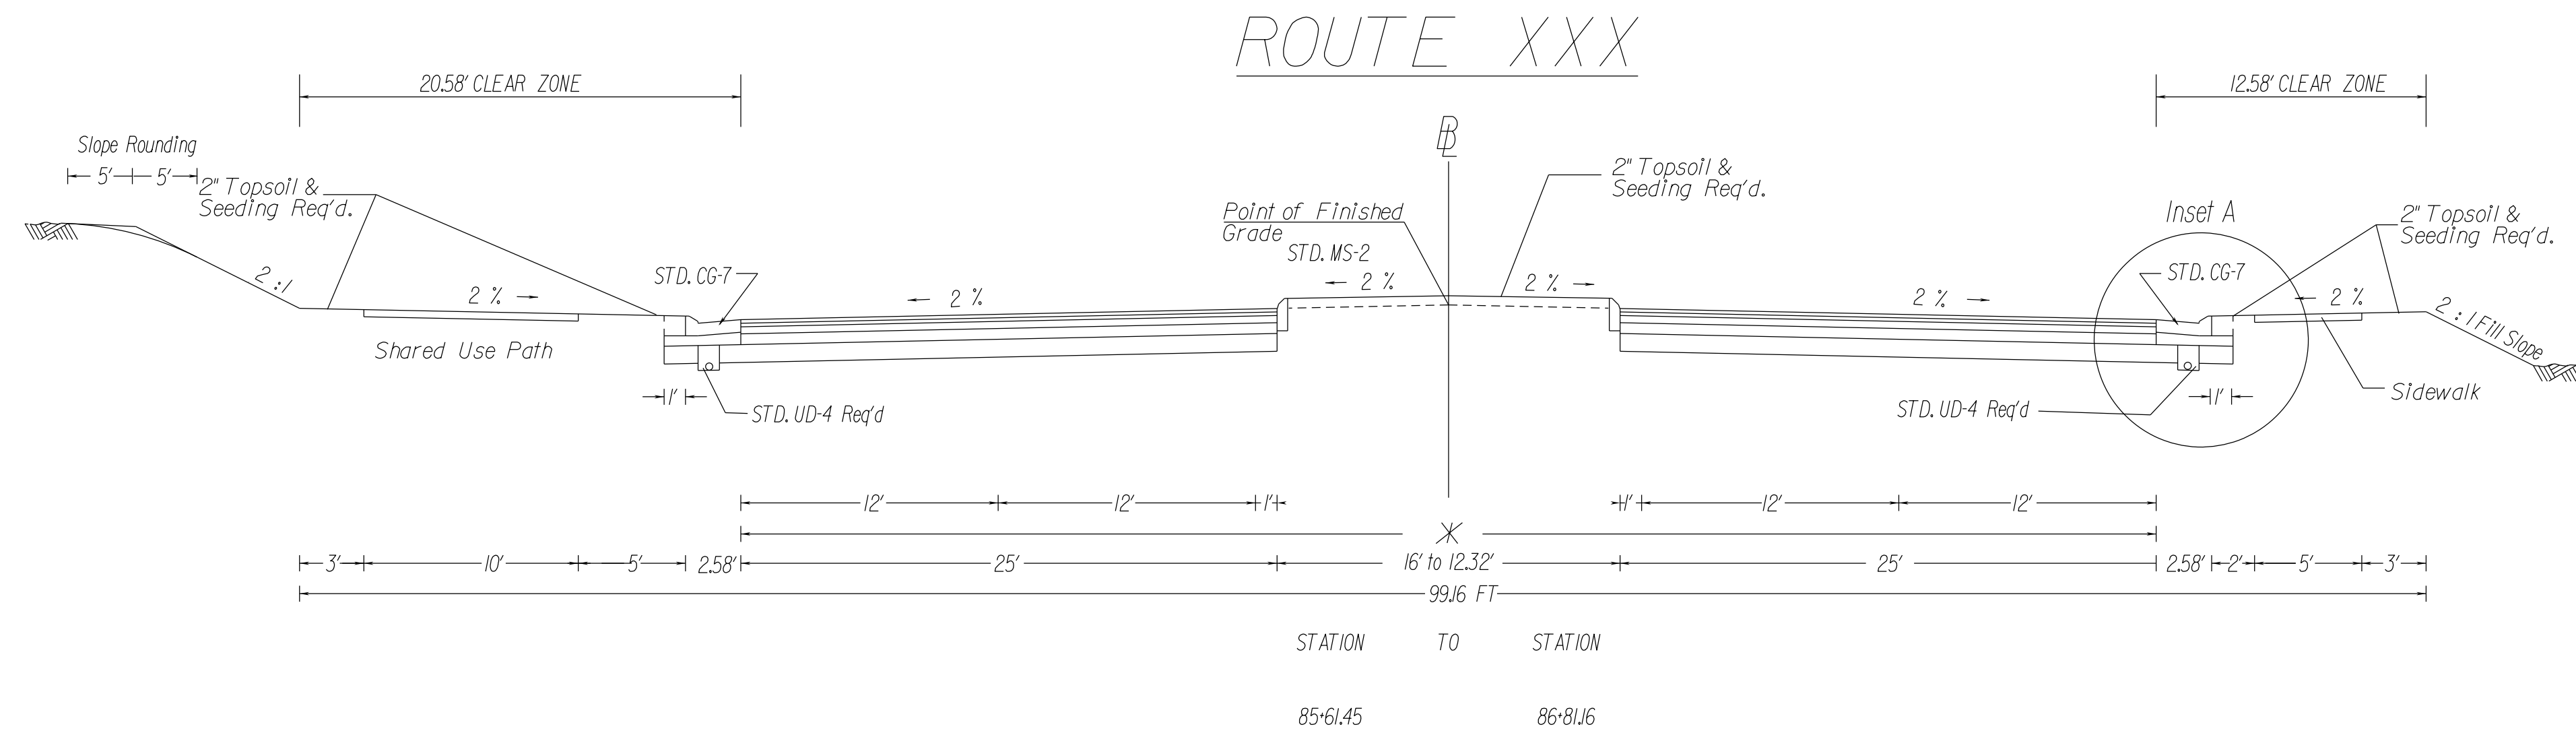


* Transition from 66' to 55' from station XX+XXX.XX to station XX+XX.XX

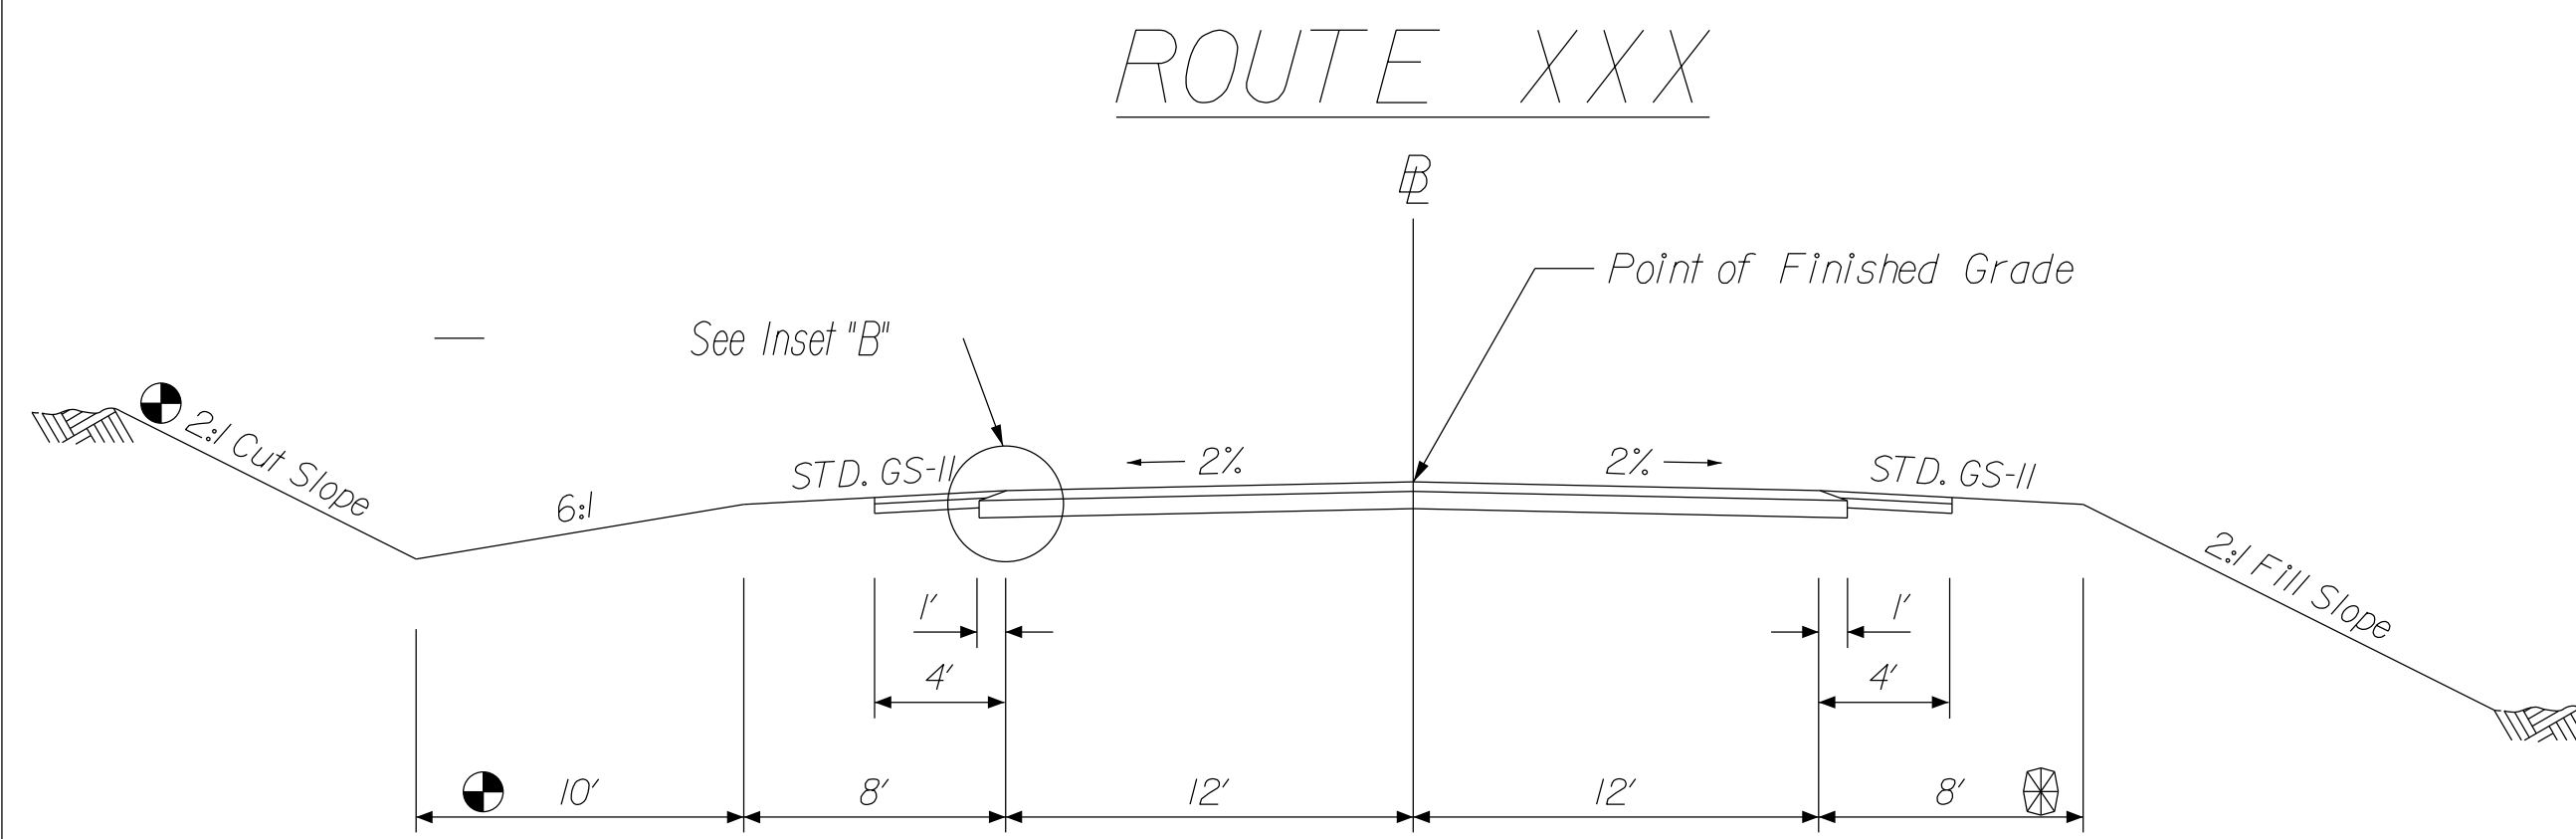

Stations: XX+XX.XX to XX+XX.XX
(Stations XX+XX.XX to XX+XX.XX to be resurfaced)


⊗ 11' Shoulder where guardrail is required.

⊙ Use 1.5:1 Cut Slope W/No Slope Rounding and 6' Ditch Rt. of Station XX+XX.XX to XX+XX.XX

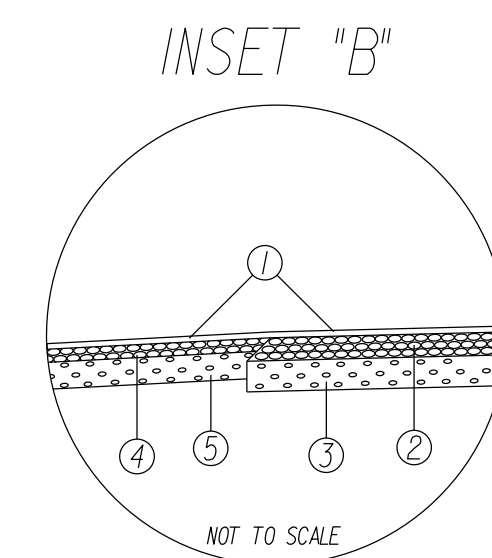

- ① ASPHALT CONCRETE TYPE SM-9.5D @ 165 LBS PER SQ. YARD
- ② 7 IN ASPHALT CONCRETE BASE COURSE TYPE BM 25.0
- ③ 10 IN AGGREGATE BASE MATERIAL, TYPE I, NO. 21B
- ④ 3 IN ASPHALT CONCRETE BASE COURSE TYPE BM 25.0
- ⑤ 6 IN AGGREGATE BASE MATERIAL, TYPE I, NO. 21B

- ① ASPHALT CONC. TYPE SM-12.5A @ 220 LBS PER SQ. YD.
- ② 2" ASPHALT CONC. TYPE IM-19.0A
- ③ 4" ASPHALT CONC. BASE TYPE BM-25.0A
- ④ 6" AGGREGATE BASE MATERIAL, TYPE I, NO. 21B
- ⑤ 10" SELECT MATERIAL (SEE SPECIAL PROVISION)
- ⑥ 4" & VAR AGGREGATE BASE MATERIAL, TYPE I, NO. 21B
- ⑦ 4" HYDRULIC CEMENT CONCRETE SIDEWALK
- ⑧ ASPHALT CONC. TYPE SM-9.5A @ 165 LBS PER SQ. YD.

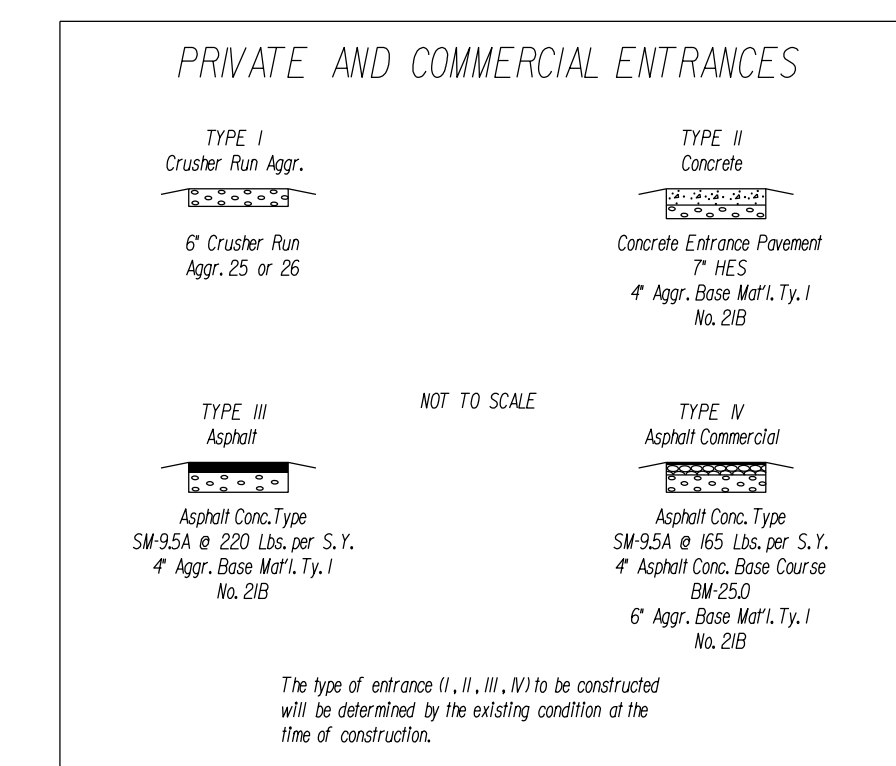

PLAN NO.	PROJECT	FILE NO.	SHEET NO.
	XXXX-XXX-XXX		2A

FIGURE 2H - 16 SAMPLE TYPICAL SECTION SHEET