

#001#
#001#

#REF001
#REF001






#REF002
#REF002

#REF003
#REF003

#REF004
#REF004

#REF005
#REF005

#REF006
#REF006

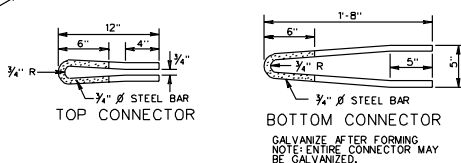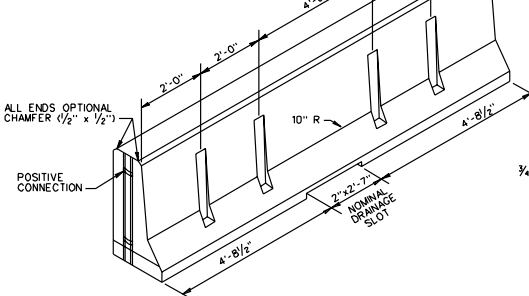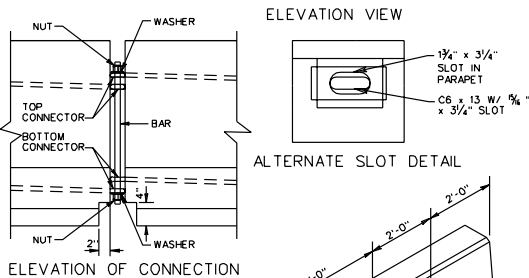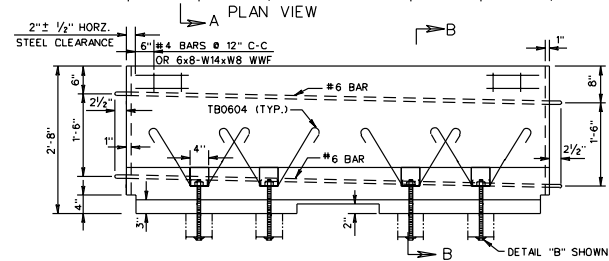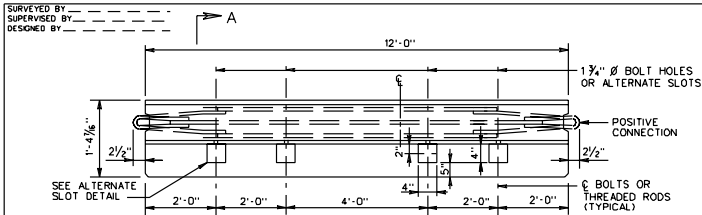

REINFORCING STEEL SCHEDULE					
FOR ONE (1) SECTION					
MARK	No.	SIZE	LENGTH	PN Ø	LOCATION
TB0401	8	4	11'-5"	---	TEMP. PARAPET
TB0502	12	5	4'-3"	2 1/2"	
TB0503	12	5	2'-8"	2 1/2"	
TB0604	8	6	4'-8"	4 1/2"	

BENDING DIAGRAM		
TB0502	TB0503	TB0604





DIMENSIONS IN BENDING DIAGRAMS ARE OUT-TO-OUT OF BARS, EXCEPT AS SHOWN.
POUNDS OF REINFORCING STEEL = 202.
REINFORCING SCHEDULE BASED ON 12'-0" UNIT LENGTH.

DESIGN FEATURES RELATING TO CONSTRUCTION OR TO REGULATION AND CONTROL OF TRAFFIC MAY BE SUBJECT TO CHANGE AS DEEMED NECESSARY BY THE DEPARTMENT

NO.	DATE	REVISION	BY	CHKD
1				

NOTES:

- BARRIER DELINEATOR TO BE SPACED IN ACCORDANCE WITH SECTION 702 OF THE ROAD AND BRIDGE SPECIFICATIONS AND THE BARRIER VERTICAL PANELS TO BE SPACED IN ACCORDANCE WITH VIRGINIA WORK AREA PROTECTION MANUAL. REFLECTIVE SURFACE, IN ALL INSTANCES, TO BE FACING ONCOMING TRAFFIC.
- CONCRETE 4000 PSI (MIN.). REINFORCING STEEL GRADE 60.
- AFTER REMOVING TEMPORARY BARRIER, CUT 1/4" Ø BOLT OR THREADED ROD AS LOW AS PRACTICAL BELOW ROADWAY SURFACE AND FILL RECESS WITH EPOXY BONDING COMPOUND EP-4 (DETAIL "A") OR REMOVE 1/4" Ø BOLTS OR THREADED RODS AND FILL HOLES WITH GROUT BONDED WITH EPOXY BONDING COMPOUND EP-4 (DETAIL "B").
- ANCHOR SYSTEM SHOWN IN DETAIL "A" SHALL BE TESTED TO PROVIDE A MINIMUM PULLOUT OF 32,000 LBS. AND INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.
- COST OF BARRIER DELINEATOR AND BARRIER VERTICAL PANELS TO BE INCLUDED IN PRICE BID PER LINEAR FOOT OF BARRIER SERVICE.
- WHEN BARRIER IS LOCATED ON VERTICAL AND/OR HORIZONTAL CURVES, THE OPENING AT THE JOINT IS NOT TO EXCEED 1".
- DESIGN FEATURES RELATING TO CONSTRUCTION OR TO REGULATION AND CONTROL OF TRAFFIC MAY BE SUBJECT TO CHANGE AS DEEMED NECESSARY BY THE DEPARTMENT.
- FOR POSITIVE CONNECTION DETAILS AND DIMENSIONS SEE STD SHEETS 501.59 - 501.61.

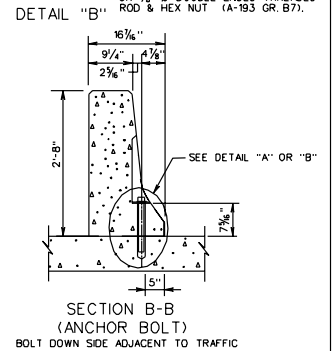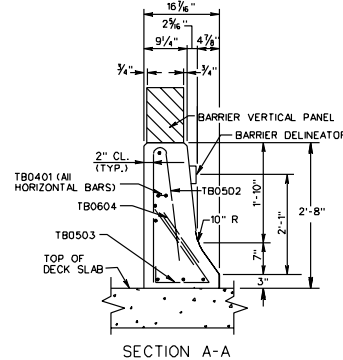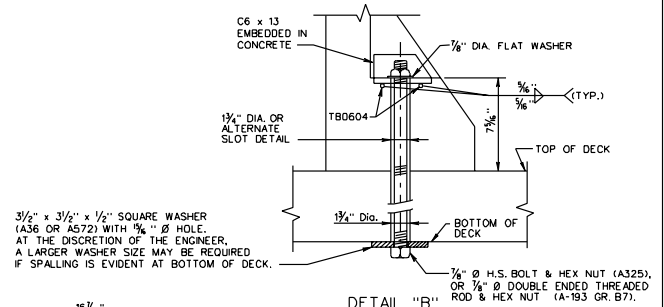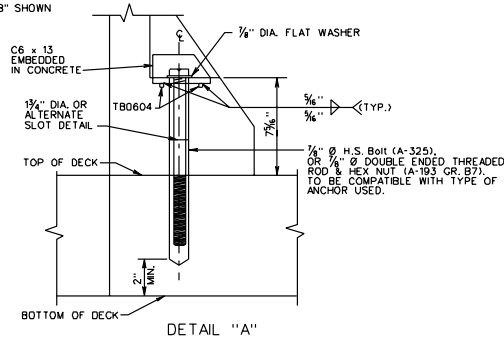

STANDARD MB-10A
TRAFFIC BARRIER SERVICE CONCRETE SINGLE FACE PARAPET
(FOR SINGLE FACE TEMPORARY INSTALLATION ON BRIDGE DECK EXTERIOR)
VIRGINIA DEPARTMENT OF TRANSPORTATION

NOT TO SCALE NEW 7/02
SPECIAL DESIGN SECTION
DRAWING NO. 1276a

DATE	BY	CHKD	APP'D