
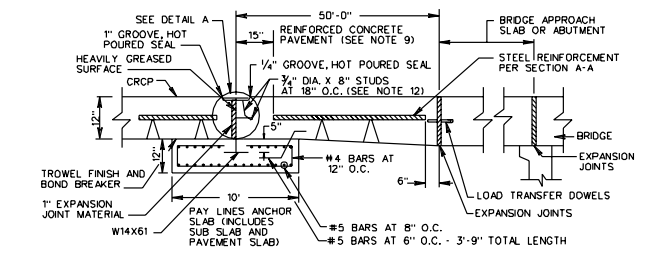

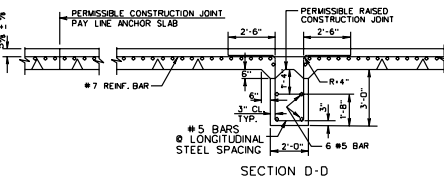
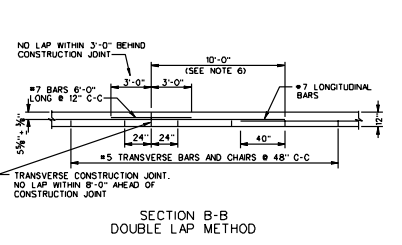



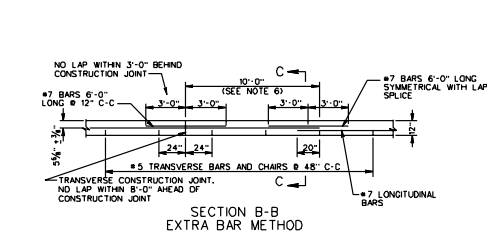

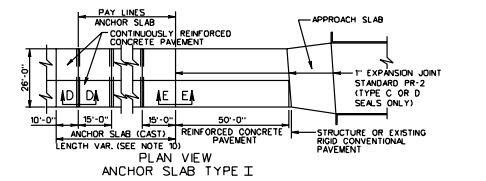
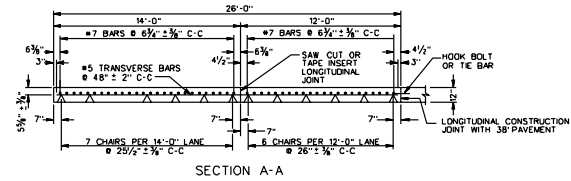



DESIGN FEATURES RELATING TO CONSTRUCTION OR TO REGULATION AND CONTROL OF TRAFFIC MAY BE SUBJECT TO CHANGE AS DEEMED NECESSARY BY THE DEPARTMENT

ROW	FROM ROW	SIZE	FROM LANE	TO LANE	FROM PRODUCT	TO PRODUCT	AREA
1		1/4"					

BARS ARE TO BE SECURELY FASTENED TO PREVENT SEPARATION DURING CONCRETE PLACEMENT.

TYPICAL LONGITUDINAL LAP



STANDARD PR-8

REV. 1/04
SPECIAL DESIGN SECTION
DRAWING NO. 2861