

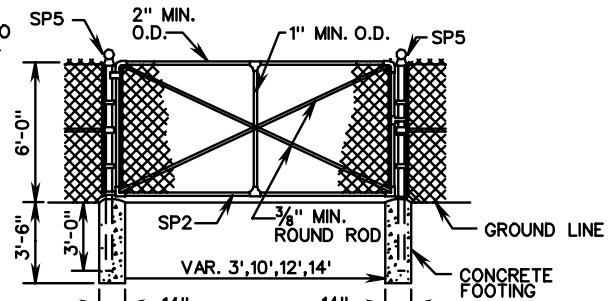


FE-CL

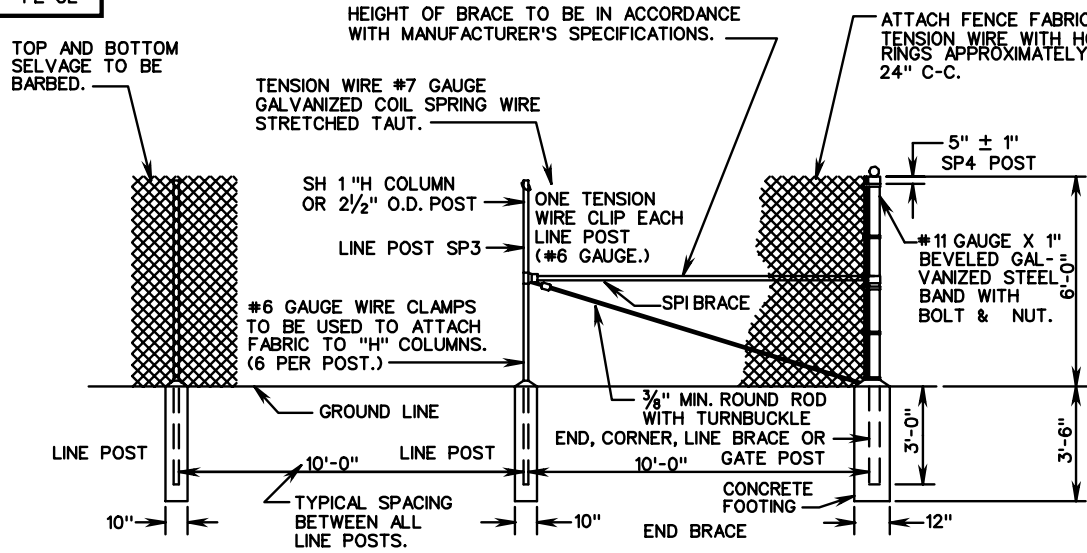


**SINGLE SWING GATE**

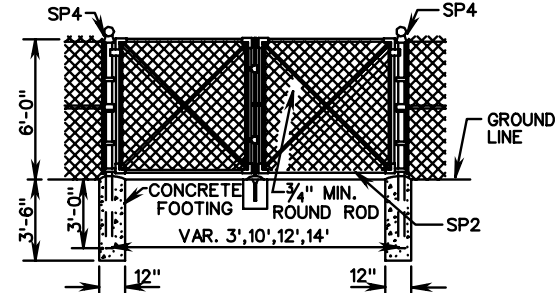


**DOUBLE SWING GATE**

(TO BE USED WHERE SWINGING CLEARANCE IS LIMITED)


NOTES:  
 SEE GENERAL NOTES-FENCING FOR ADDITIONAL DETAILS AND INSTRUCTIONS  
 A MOISTURE-EXCLUDING CAP IS REQUIRED ON TUBULAR POSTS.  
 MATERIAL FOR CAP SHALL CONFORM TO THE ALLOWABLE TYPES FOR OTHER LISTED FILLINGS.  
 CORNER BRACE - TO BE USED WHEN HORIZONTAL ALIGNMENT CHANGES 15° OR MORE.  
 SEE END BRACE SHOWN ABOVE FOR BRACE DETAILS.

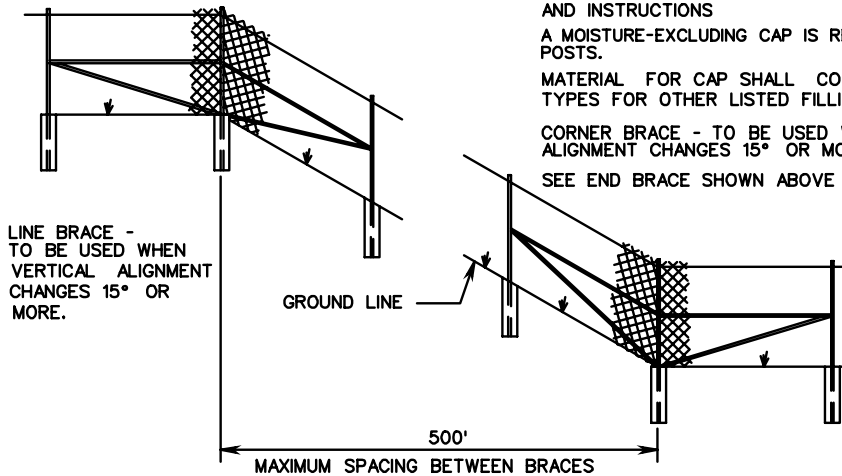


ALTERNATE ANCHOR DEVICES MAY BE USED IN LIEU OF SETTING POST IN CONCRETE. DEVICES SHOWN ARE REPRESENTATIONAL ONLY. SEE GENERAL NOTES.



FITTINGS SHOWN ARE SUGGESTED ONLY. SIMILAR DESIGNS MEETING THE APPROVAL OF THE ENGINEER MAY BE USED.



BOTTOM GATE CORNER & HINGE ATTACHMENT

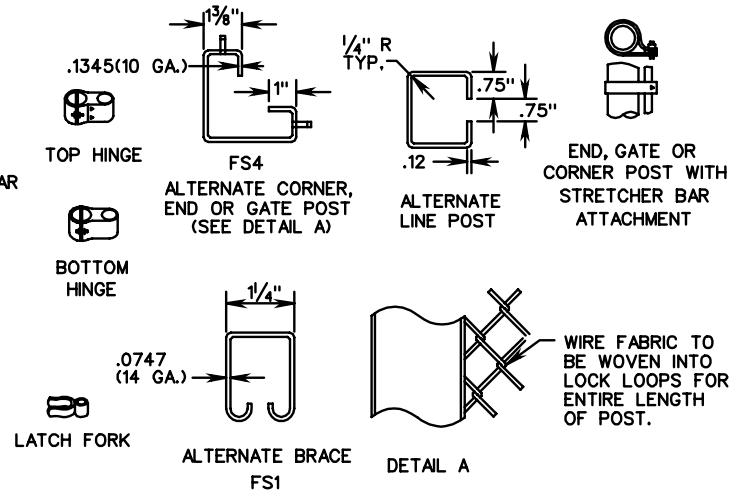

**STANDARD FENCE  
 CHAIN LINK**

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION REFERENCE

242  
 507

REV. 1 / 04  
 502.04