


**CURB RAMP APPLICATION DETAILS\***

**ONE CURB RAMP SHALL BE PROVIDED FOR EACH DIRECTION OF INTERSECTION CROSSING, WHERE FEASIBLE. (CG-12, TYPE A, B OR C)**

**TWO CG-12, TYPE B'S ARE SHOWN BELOW:**

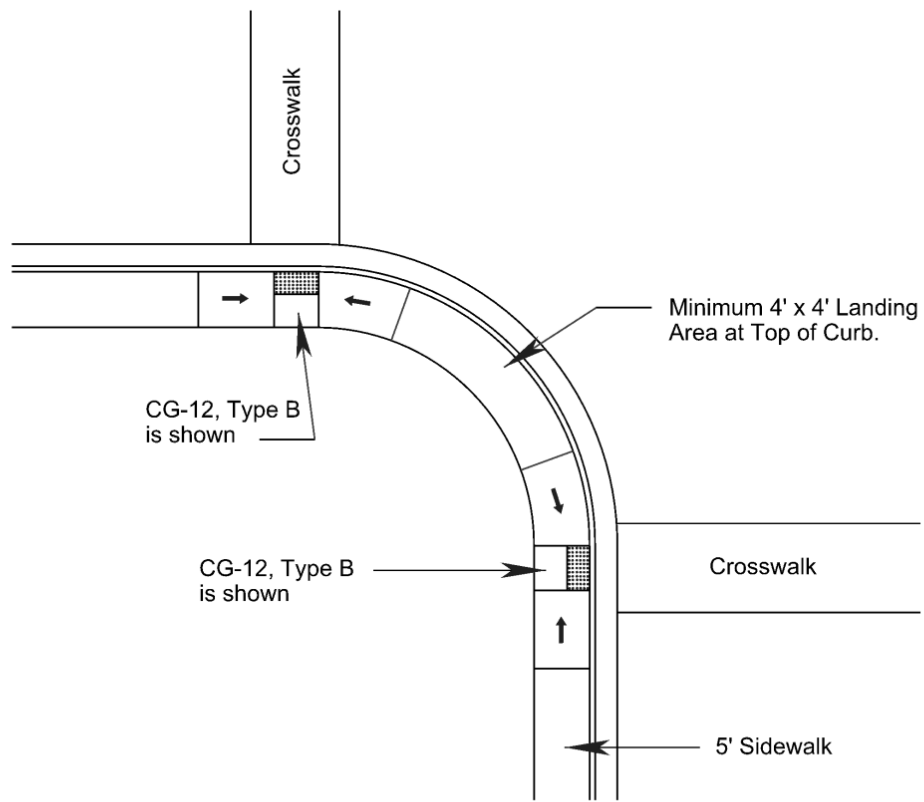

Ramp (with arrows) are 12:1 Maximum slope.

**FIGURE A-5-15 TWO CG-12 TYPE B FOR EACH DIRECTION AT INTERSECTION**

\* Rev.7/14