REVISED 1-04

FE-CL

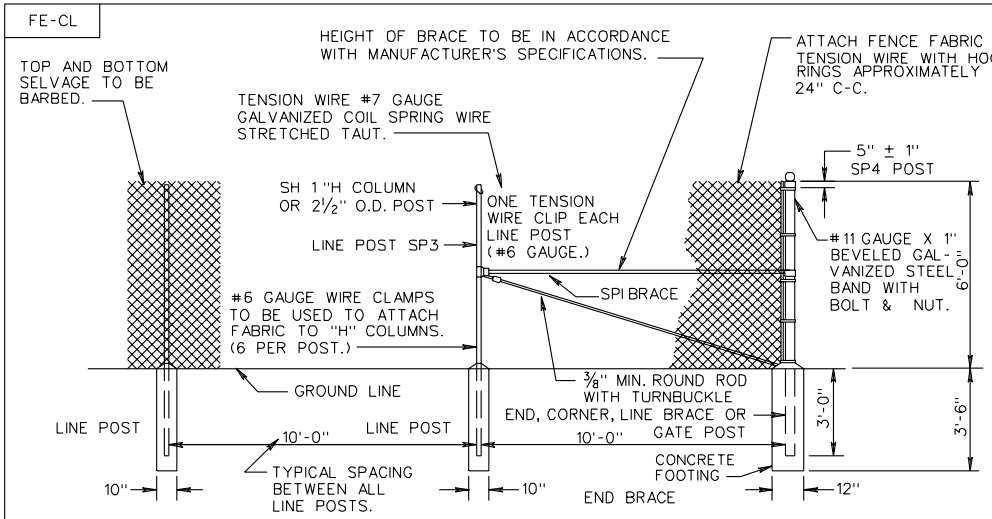

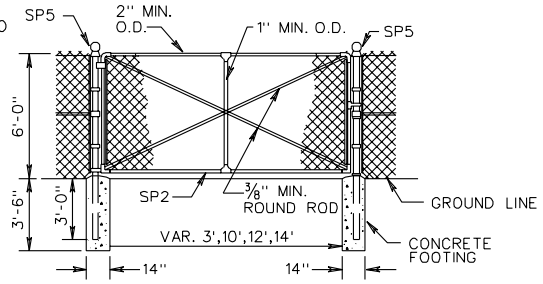

SINGLE SWING GATE

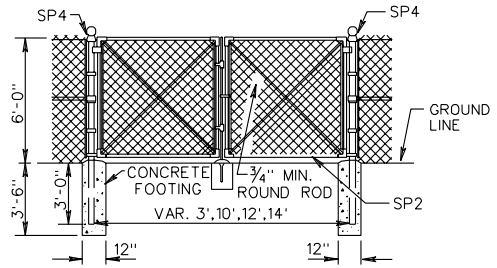

DOUBLE SWING GATE

(TO BE USED WHERE SWINGING CLEARANCE IS LIMITED)

NOTES:
SEE GENERAL NOTES-FENCING FOR ADDITIONAL DETAILS AND INSTRUCTIONS

A MOISTURE-EXCLUDING CAP IS REQUIRED ON TUBULAR POSTS.

MATERIAL FOR CAP SHALL CONFORM TO THE ALLOWABLE TYPES FOR OTHER LISTED FILLINGS.

CORNER BRACE - TO BE USED WHEN HORIZONTAL ALIGNMENT CHANGES 15° OR MORE.

SEE END BRACE SHOWN ABOVE FOR BRACE DETAILS.

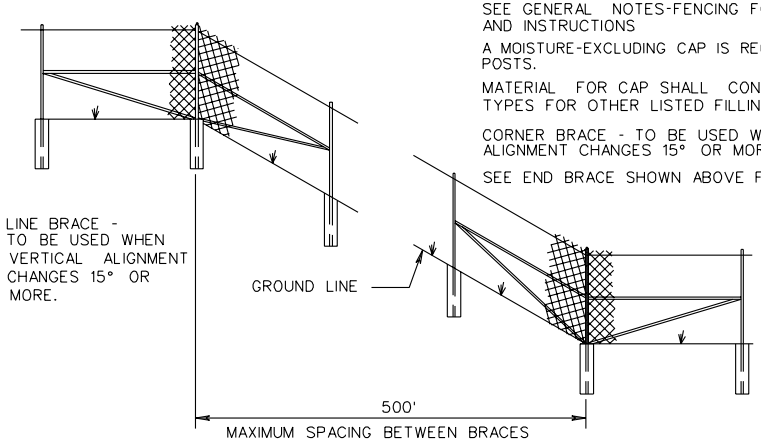

PLUNGER BAR CATCH

TOP HINGE

BOTTOM HINGE



FS4

ALTERNATE CORNER, END OR GATE POST (SEE DETAIL A)



ALTERNATE LINE POST

END, GATE OR CORNER POST WITH STRETCHER BAR ATTACHMENT

ALTERNATE ANCHOR DEVICES MAY BE USED IN LIEU OF SETTING POST IN CONCRETE. DEVICES SHOWN ARE REPRESENTATIONAL ONLY. SEE GENERAL NOTES.



ALTERNATE ANCHOR DEVICES

FITTINGS SHOWN ARE SUGGESTED ONLY. SIMILAR DESIGNS MEETING THE APPROVAL OF THE ENGINEER MAY BE USED.

BOTTOM GATE CORNER & HINGE ATTACHMENT

LATCH FORK



ALTERNATE BRACE FS1



DETAIL A

WIRE FABRIC TO BE WOVEN INTO LOCK LOOPS FOR ENTIRE LENGTH OF POST.

REV. 7/03

STANDARD FENCE CHAIN LINK

VIRGINIA DEPARTMENT OF TRANSPORTATION

502.04

SPECIFICATION REFERENCE
242 507