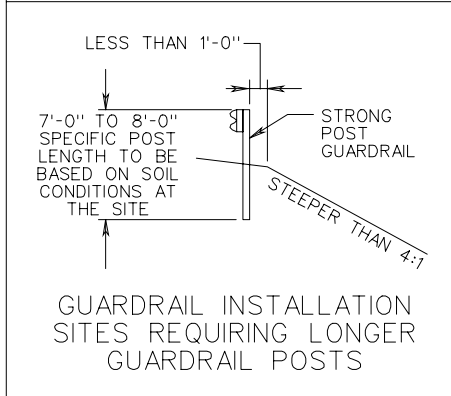


**TABLE II**  
NORMAL GUARDRAIL LOCATION-THROUGH TRAFFIC LANES RIGHT OF TRAFFIC

SHOULDER WIDTH (S)	PAVED SHOULDER WIDTH (PS)	OFFSET FROM EDGE OF PAVEMENT TO FACE OF GUARDRAIL (O)
15'	6', 10' or 12'	12'
13'	8'	10'
11'	0, 3', 4' or 6'	8'
9'	0, 3' or 4'	6'
7'	0 or 3'	4'
5'	0 or 3'	2'



**TABLE I**  
NORMAL GUARDRAIL LOCATION-THROUGH TRAFFIC LANES LEFT OF TRAFFIC

SHOULDER WIDTH (S)	PAVED SHOULDER WIDTH (PS)	OFFSET FROM EDGE OF PAVEMENT TO FACE OF GUARDRAIL (O)
15'	3', 4', 10' or 12'	12'
13'	3'	10'
12' (MED. 6 LANE)	10'	10'
11'	3'	8'
8' (MED.)	3' or 4'	5'

**GUARDRAIL LOCATION-ON RECOVERABLE SLOPE**

SPECIFICATION REFERENCE
221 505

**W BEAM GUARDRAIL INSTALLATION CRITERIA**