




ASSEMBLY TO BE
ERECTED 5' FROM THE
NOSE OF MEDIAN AND
CENTERED IN MEDIAN.

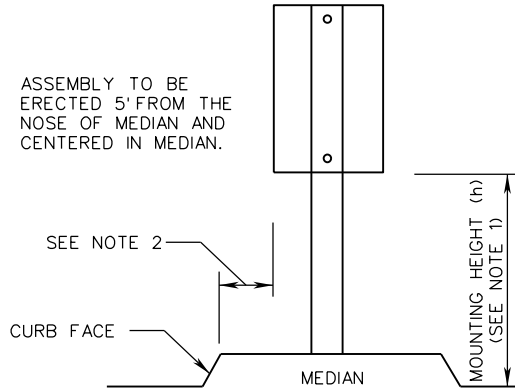


**SINGLE POST
MEDIAN INSTALLATIONS**

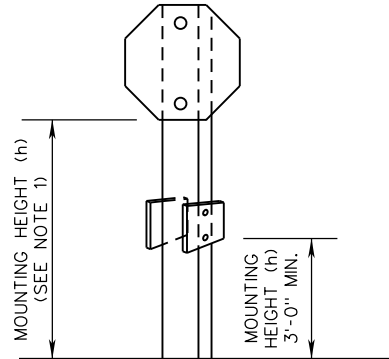


**ONE WAY SIGNS
ON EXIT RAMP
WITH STOP SIGN**

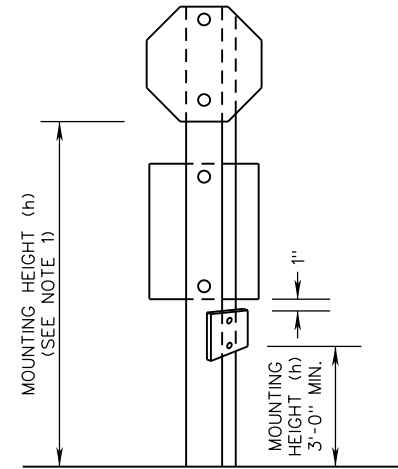

**STOP OR YIELD SIGNS AND
DO NOT ENTER SIGN
(AT EXIT RAMP ONLY)**

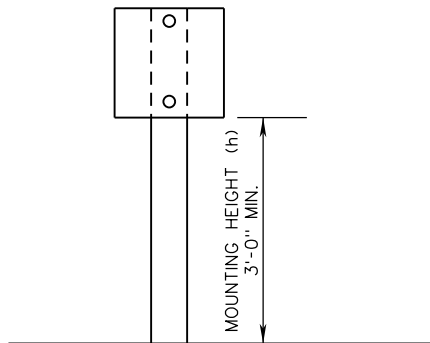

**WRONG WAY SIGNS/
DO NOT ENTER SIGNS
(AT EXIT RAMP ONLY)**

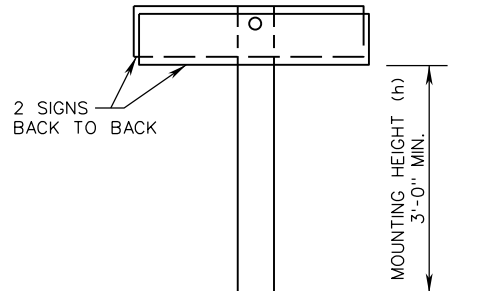

**ONE WAY SIGNS
ON EXIT RAMP**

NOTES:

1. MOUNTING HEIGHT (h) SHALL BE IN ACCORDANCE WITH STP-1 SHEET 1 OF 12 EXCEPT AS NOTED ON THIS SHEET.
2. 2' MINIMUM FOR MEDIANS OVER 10' IN WIDTH. 12" MINIMUM FOR MEDIANS 10' OR LESS IN WIDTH UNLESS SHOWN OTHERWISE IN THE CONTRACT DOCUMENTS.
3. MOUNTING HEIGHTS (h) ARE MEASURED FROM BOTTOM OF SIGN PANEL TO ROADWAY ELEVATION AT EDGE OF TRAVELWAY OR TOP OF CURB.



ROAD AND BRIDGE STANDARDS

A COPY OF THE ORIGINAL SEALED AND SIGNED DRAWING IS ON FILE IN THE CENTRAL OFFICE.

SIGN POST

SPECIFICATION
REFERENCE

SHEET 12 OF 12 REVISION DATE

MOUNTING HEIGHTS OF SIGN INSTALLATIONS

1321.21

NEW 01/15

VIRGINIA DEPARTMENT OF TRANSPORTATION

700